
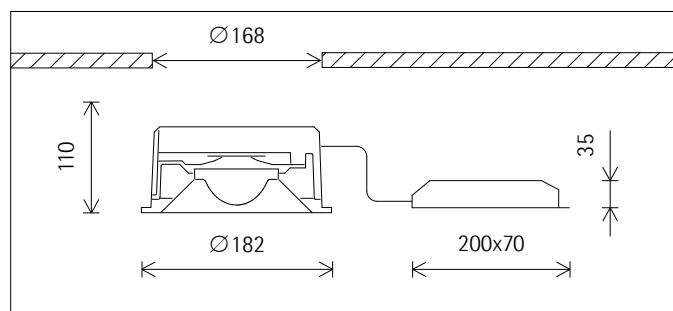


31409.000 (C4000590)

White (RAL9016)
LED module: 28W 3640lm 4000K
neutral white
DALI-2
Version 6
Construction size 5
Covered mounting detail
Lens system, oval flood

Product description

Housing: cast aluminium, designed as heat sink, with connection cable L 500mm. Fixing springs for ceiling thicknesses of 1-40mm.
5-pole terminal block. Through-wiring possible.
Includes ERCO DALI control gear.
LED module: high-power LEDs.
Lens system made of optical polymer, adjustable $\pm 10^\circ$.
Anti-glare cone with covered mounting detail: polymer, white (RAL9016).
Optical cut-off 30° .
Dimming possible via commercially available push-buttons (Push Dim).
The luminaire is protected on the room side against splashing water.
Approved for use as emergency lighting according to IEC / EN 60598-2-22.
Safety class II
Weight 1.03kg



Beam angle
C₀ 86°
C₉₀ 41°

UGR glare evaluation
C₀ 24
C₉₀ 19

Technical data

Luminous flux of the luminaire	3105lm
Connected load	31.6W
Luminaire efficacy	98lm/W
Colour deviation	1.5 SDCM
Colour rendition index	CRI 92
Lumen maintenance	L90/B10 >50000h L90 >100000h
LED failure rate	0.1% >50000h
Dimming range	1%-100%
Dimming method	CCR
TLA (Temporal Light Artefacts)	SVM ≤ 0.1; PstLM ≤ 1
LMF	E
Standby power per control gear	0.4W
Luminaires per circuit breaker B16	100

For your regional contact in the ERCO
Sales network click here
www.erco.com/contact

Technical Region: 220-240V 50/60Hz
We reserve the right to make technical
and design changes.
Edition: 05.05.2026
Current version under
www.erco.com/31409.000

Planning data

31409.000 LED module: 28W 3640lm 4000K neutral white
 Connected load P: 31.6 W
 Connected load per 100lx P*: 1.0 W/m²
 Number of luminaires per 100lx n*: 3.1 1/100m²

31409.000 LED module: 28W 3640lm 4000K neutral white
 Number of luminaires per 100m² for 100lx 200lx 300lx 500lx
 4 7 10 16

31409.000 LED module: 28W 3640lm 4000K neutral white
 Module (m) 1.2x1.8 1.8x1.8 1.8x2.4 2.4x2.4
 Illuminance E_n (lx) for module (m) 1509 1006 755 566

Melanopic light effect

Art. no. Spectrum MR MDER
 31409.000 (direct) 4000K CRI 92 0.71 0.65

MR Melanopic factor (of luminous radiation) a_{mel,v}
 MDER Melanopic Daylight Efficacy Ratio [gamma]_{mel,v,D65}

Multiplying the illuminance with the melanopic daylight efficacy ratio MDER gives the melanopic equivalent daylight illuminance MEDl. (MEDl = Melanopic Equivalent Daylight Illuminance [lx] E_{v, mel, D65} [lx]).

Extract from the Environmental Product Declaration (EPD)

The entire EPD can be found at: www.ercos.com/31409.000

Extrapolation coefficients to convert the reference data from the EPD document for the declared unit
 Lighting output Manufacturing Distribution Installation Use EoL Benefits and loads
 3105 1.203572734 1.049256525 0.999559248 0.957575758 0.069239142 1.203572734

Frequently used EPD data that have already been converted for this article number.

Parameter	Unit	A1-A3	A4	A5	B6	C1	C2	C3	C4	D	Total
Results per functional unit											
GWP	kg CO2 eq	3.80E00	6.50E-02	1.03E-01	1.08E02	0.00E00	1.98E-03	1.40E-01	1.01E-03	-8.61E-02	1.12E02
GWP-biogenic	kg CO2 eq	-1.21E-01	0.00E00	1.00E-01	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00	-2.10E-02
Results per declared unit											
GWP	kg CO2 eq	2.53E01	4.33E-01	6.83E-01	7.19E02	0.00E00	1.32E-02	9.31E-01	6.74E-03	-5.73E-01	7.46E02
GWP-biogenic	kg CO2 eq	-8.02E-01	0.00E00	6.66E-01	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00	-1.36E-01

A1-A3 Manufacturing
 A4 Distribution
 A5 Installation
 B6 Use
 C1-C4 End of Life
 D Benefits and loads

The data for operating the light (Use B6) refer to the European power source mix.
 You will find the ERCO EPD Help under Downloads/General planning data.

Cleaning (a)	1				2				3			
Ambient conditions	P	C	N	D	P	C	N	D	P	C	N	D
LMF	0.96	0.94	0.90	0.86	0.93	0.91	0.86	0.81	0.92	0.90	0.84	0.79

Hours of operation (h)	1000	5000	10000	20000	30000	40000	50000
LLMF	1.00	0.99	0.98	0.96	0.94	0.92	0.90
LSF	1	1	1	1	1	1	1

MF LMFxRSMFxLLMFxLSF
 MF Maintenance Factor
 LMF Luminaire Maintenance Factor
 RSMF Room Surface Maintenance Factor
 LLMF Lamp Lumens Maintenance Factor
 LSF Lamp Survival Factor
 P Room pure
 C Room clean
 N Room normal
 D Room dirty

Planning data

Data according to regulations

2019/2020/EU supplemented by 2021/341/EU and 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance

This product contains a light source of efficiency class D

Due to thermal and photometric properties as well as to protect electronic components from ESD (electrostatic discharge) the light source cannot be changed by the customer.

ID EPREL: 1784494

Model identifier: 3000068324

Download data sheets for control gear and disassembly instructions at www.erco.com/slr

Technical data in accordance with international norms and standards

IEC 60598	Luminaires – Part 1+2: general requirements, specific requirements and tests
IEC 62031	LED modules for general lighting – safety requirements
IEC 62471	Photobiological safety of lamps and lamp systems
EN13032-4	Light and lighting – measurement and representation of photometric data
CIE 13	Method of measuring and specifying colour rendering properties of light sources

All technical data is subject to industry-standard tolerances.


Also see www.erco.com/erco-led

For explanations of the symbols and abbreviations used and other general information, see www.erco.com/symbols

Accessories

**83740.000**

Concrete housing
Steel, galvanised.
Recommended 0-8mm aggregate for
the concrete.
Weight 4.60kg

**88290.000**

Compensation set
for oversize ceiling cut-out.
Lock ring: Sheet steel, galvanised.
Mounting for ceiling thickness of min.
10mm.
Cover ring: Metal, white.
when ordering, please state the
diameter of the existing ceiling cutout
and the diameter of the luminaire.
Weight 0.40kg

**83980.000**

Cover ring
Metal, white. For covering the gap
where ceiling cut-outs are too big.
Inner and outer diameter to be
specified when placing order.
Weight 0.40kg