
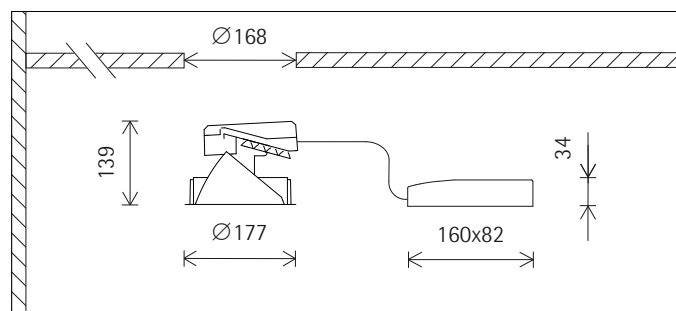


40261.000 White (RAL9002)
LED module: 24.2W 3107lm 3000K
warm white
Switchable
Version 3
Construction size 5
Covered mounting detail
Flush mounting is possible with
accessory
Spherolit lens, wallwash

Product description
Housing: cast aluminium, designed as
heat sink, with connection cable L
850mm. Fixing ring: polymer, black.
Mounting ring: polymer, white
(RAL9002). Mounting for ceiling
thicknesses of 1-30mm.
2-pole terminal block.
Includes control gear.
LED module: high-power LEDs.
Collimating lens made of optical
polymer.
Anti-glare cone: polymer, coated matt
silver.
Cut-off angle 40°.
The luminaire is protected on the room
side against splashing water.
Safety class II
Weight 1.40kg



Mean illuminance E_n (wall)

Wall height (m)	6			
Offset from wall (m)	0.90	0.90	0.90	1.40
Luminaire spacing (m)	0.90	1.40	1.90	2.40
Illuminance E_n (lx)	161	105	86	46

Technical data

Luminous flux of the luminaire	2091lm
Connected load	26.0W
Luminaire efficacy	80lm/W
Colour deviation	1.5 SDCM
Colour rendition index	CRI 92
Lumen maintenance	L90/B10 >50000h L90 >100000h
LED failure rate	0.1% >50000h
Dimming range	--
Dimming method	--
TLA (Temporal Light Artefacts)	SVM ≤ 0.4; PstLM ≤ 1
LMF	D
Standby power per control gear	--
Luminaires per circuit breaker B16	21

Planning data

Melanopic light effect

Art. no.	Spectrum	MR	MDER
40261.000 (direct)	3000K CRI 92	0.53	0.48

MR	Melanopic factor (of luminous radiation) a _{mel,v}
MDER	Melanopic Daylight Efficacy Ratio [gamma] _{mel,v,D65}

Multiplying the illuminance with the melanopic daylight efficacy ratio MDER gives the melanopic equivalent daylight illuminance MEDl. (MEDl = Melanopic Equivalent Daylight Illuminance [lx] E_{v, mel, D65} [lx]).

Extract from the Environmental Product Declaration (EPD)

The entire EPD can be found at: www.ercos.com/40261.000

Extrapolation coefficients to convert the reference data from the EPD document for the declared unit

Lighting output	Manufacturing	Distribution	Installation	Use	End of Life	Benefits and loads
1741	1.07	1.029	1.033	1.576	1.027	1.07

Frequently used EPD data that have already been converted for this article number.

Parameter	Unit	A1-A3	A4	A5	B6	C1	C2	C3	C4	D	Total, excl. D
Results per functional unit											
GWP	kg CO ₂ -eq.	2.85E00	1.19E-01	2.58E-01	3.16E02	0.00E00	3.30E-03	2.92E-01	3.09E-03	-1.95E-01	3.20E02
GWP-biogenic	kg CO ₂ -eq.	-2.58E-01	0.00E00	2.49E-01	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00	-9.00E-03
Results per declared unit											
GWP	kg CO ₂ -eq.	1.06E01	4.43E-01	9.61E-01	1.18E03	0.00E00	1.23E-02	1.09E00	1.15E-02	-7.30E-01	1.19E03
GWP-biogenic	kg CO ₂ -eq.	-9.62E-01	0.00E00	9.29E-01	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00	-3.30E-02

A1-A3	Manufacturing
A4	Distribution
A5	Installation
B6	Use
C1-C4	End of Life
D	Benefits and loads

The data for operating the light (Use B6) refer to the European power source mix.
You will find the ERCO EPD Help under Downloads/General planning data.

Cleaning (a)	1				2				3			
Ambient conditions	P	C	N	D	P	C	N	D	P	C	N	D
LMF	0.94	0.88	0.82	0.77	0.91	0.83	0.77	0.71	0.89	0.79	0.73	0.65

Hours of operation (h)	1000	5000	10000	20000	30000	40000	50000
LLMF	1.00	0.99	0.98	0.96	0.94	0.92	0.90
LSF	1	1	1	1	1	1	1

MF	LMFxRSMFxLLMFxLSF
MF	Maintenance Factor
LMF	Luminaire Maintenance Factor
RSMF	Room Surface Maintenance Factor
LLMF	Lamp Lumens Maintenance Factor
LSF	Lamp Survival Factor
P	Room pure
C	Room clean
N	Room normal
D	Room dirty

Data according to regulations

2019/2020/EU supplemented by 2021/341/EU and 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance

This product contains a light source of efficiency class E
Due to thermal and photometric properties as well as to protect electronic components from ESD (electrostatic discharge) the light source cannot be changed by the customer.

ID EPREL: 1784428
Model identifier: 3000068218
Download data sheets for control gear and disassembly instructions at www.ercos.com/slr

Planning data

Technical data in accordance with international norms and standards

IEC 60598	Luminaires – Part 1+2: general requirements, specific requirements and tests
IEC 62031	LED modules for general lighting – safety requirements
IEC 62471	Photobiological safety of lamps and lamp systems
EN 13032-4	Light and lighting – measurement and representation of photometric data
CIE 13	Method of measuring and specifying colour rendering properties of light sources

All technical data is subject to industry-standard tolerances.

Also see www.erco.com/erco-led

For explanations of the symbols and abbreviations used and other general information, see www.erco.com/symbols



Accessories




83740.000
Concrete housing
Steel, galvanised.
Recommended 0-8mm aggregate for
the concrete.
Weight 4.60kg




82943.000
Mounting ring
For covered mounting of recessed
luminaires size 5.
Polymer, black (RAL9011). Mounting for
ceiling thicknesses of 1-30mm.
Weight 0.15kg



83596.000
Spacer plate
for flush-mounting of downlights in
concrete housings in exposed concrete
ceilings. Aluminium.
Weight 0.11kg
83740.000

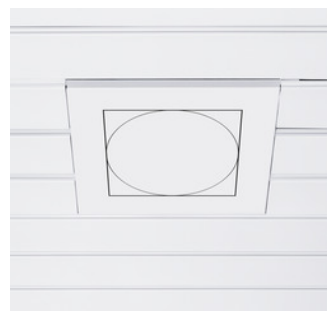

82950.000
Mounting plate for panelled ceilings
Metal, white (RAL9002) powder-coated.
Individual design of mounting plates
according to ceiling type and luminaire.
Quote ceiling type and dimensions.
Weight 0.80kg



88290.000
Compensation set
for oversize ceiling cut-out.
Lock ring: Sheet steel, galvanised.
Mounting for ceiling thickness of min.
10mm.
Cover ring: Metal, white.
when ordering, please state the
diameter of the existing ceiling cutout
and the diameter of the luminaire.
Weight 0.40kg



82937.000
Mounting ring
For flush mounting of recessed
luminaires size 5.
Polymer, white (RAL9002). Mounting
for ceiling thicknesses of 12.5-25mm.
The recess depth of the luminaire
increases by 2mm.
Weight 0.12kg



83980.000
Cover ring
Metal, white. For covering the gap
where ceiling cut-outs are too big.
Inner and outer diameter to be
specified when placing order.
Weight 0.40kg

