








42642.000 White (RAL9002)
LED module: 73.3W 6909lm 3000K
warm white
DALI-2
Version 4
Spherolit lens, wide flood

Product description

Housing and luminaire head: cast aluminium, powder-coated.
Luminaire head tiltable from 0° to 90°. Screw for fixing the inclination angle. Housing can be rotated through 360° on the adapter. Internal wiring.
DALI adapter for ERCO DALI 220-240V track: polymer, white.
2 ERCO DALI control units each with one DALI address.
LED module: high-power LEDs.
Collimating lens made of optical polymer.
For ceiling mounting only.
Install the luminaire out of people's normal reach.
Weight 3.80kg

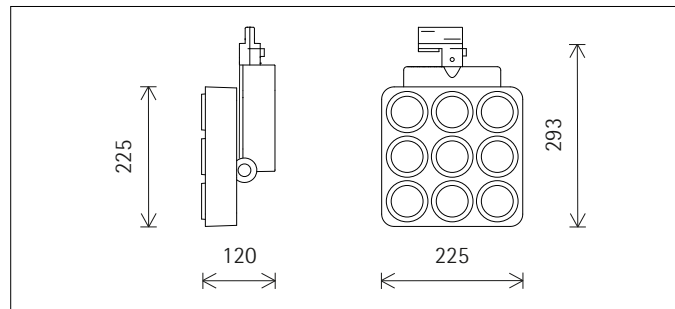

h(m)	E(lx)	D(m)
		48.2°
1.0	8007	0.89
2.0	2002	1.79
3.0	890	2.68
4.0	500	3.58
5.0	320	4.47

Technical data

Luminous flux of the luminaire	5361lm
Connected load	82.3W
Luminaire efficacy	65lm/W
Colour deviation	1.5 SDCM
Colour rendition index	CRI 97
Lumen maintenance	L90/B10 >50000h L90 >100000h
LED failure rate	0.1% >50000h
Dimming range	1%-100%
Dimming method	CCR
TLA (Temporal Light Artefacts)	SVM ≤ 0.1; PstLM ≤ 1
LMF	E
Standby power per control gear	0.4W
Luminaires per circuit breaker B16	38



Mounting
ERCO DALI track
Hi-trac DALI track
DALI singlet

For your regional contact in the ERCO
Sales network click here
www.erco.com/contact

Technical Region: 220-240V 50/60Hz
We reserve the right to make technical
and design changes.
Edition: 28.04.2026
Current version under
www.erco.com/42642.000

Planning data

Melanopic light effect

Art. no.	Spectrum	MR	MDER
42642.000 (direct)	K CRI 97	0.57	0.52
	K CRI 97	0.57	0.52

MR	Melanopic factor (of luminous radiation) $a_{\text{mel},v}$
MDER	Melanopic Daylight Efficacy Ratio $[\gamma]_{\text{mel},v,D65}$

Multiplying the illuminance with the melanopic daylight efficacy ratio MDER gives the melanopic equivalent daylight illuminance MELI. (MELI Melanopic Equivalent Daylight Illuminance $[lx] E_{v,\text{mel},D65} [lx]$).

Cleaning (a)	1				2				3			
Ambient conditions	P	C	N	D	P	C	N	D	P	C	N	D
LMF	0.96	0.94	0.90	0.86	0.93	0.91	0.86	0.81	0.92	0.90	0.84	0.79

Hours of operation (h)	1000	5000	10000	20000	30000	40000	50000
LLMF	1.00	0.99	0.98	0.96	0.94	0.92	0.90
LSF	1	1	1	1	1	1	1

MF	LMFxRSMFxLLMFxLSF
MF	Maintenance Factor
LMF	Luminaire Maintenance Factor
RSMF	Room Surface Maintenance Factor
LLMF	Lamp Lumens Maintenance Factor
LSF	Lamp Survival Factor
P	Room pure
C	Room clean
N	Room normal
D	Room dirty

Data according to regulations

2019/2020/EU supplemented by 2021/341/EU and 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance

This product contains a light source of efficiency class F
Due to thermal and photometric properties as well as to protect electronic components from ESD (electrostatic discharge) the light source cannot be changed by the customer.

ID EPREL: 697037
Model identifier: 3000056415
Download data sheets for control gear and disassembly instructions at www.erco.com/slr

Technical data in accordance with international norms and standards

IEC 60598	Luminaires – Part 1+2: general requirements, specific requirements and tests
IEC 62031	LED modules for general lighting – safety requirements
IEC 62471	Photobiological safety of lamps and lamp systems
EN13032-4	Light and lighting – measurement and representation of photometric data
CIE 13	Method of measuring and specifying colour rendering properties of light sources



All technical data is subject to industry-standard tolerances.
Also see www.erco.com/erco-led

For explanations of the symbols and abbreviations used and other general information, see www.erco.com/symbols


Accessories





70851.000
Spherolit lens spot
made of optical polymer.
Replacement without tools.




70854.000
Spherolit lens oval flood
made of optical polymer.
Replacement without tools.





70852.000
Spherolit lens flood
made of optical polymer.
Replacement without tools.



70855.000
Spherolit lens wallwash
made of optical polymer.
Replacement without tools.



70853.000
Spherolit lens wide flood
made of optical polymer.
Replacement without tools.



70978.000
Spherolit lens extra wide flood
made of optical polymer.
Replacement without tools.

