MOORE®

CONFIGURATION GUIDE

CG363-6
Issue 2
May 1997

MODEL 363 VIEWPAC™ MULTI-POINT DIGITAL RECORDER COMMON WIRING DIAGRAMS

This configuration guide contains a collection of Model 363 common wiring diagrams. These diagrams should be helpful when preparing individual wiring diagrams since they include examples of most of the basic wiring considerations. Refer to the Recorder's Installation and Service Instruction, SD363-1, for more details on Model 363 electrical connections.


The following is a list of diagrams included in this guide.

DRAWING NUMBER	TITLE
W363	Model 363 Rear Terminal Assignments
W363-1	Model 385 to Model 363 Connections for Recording a Two-Wire Transmitter
W363-2	Model 352 to Model 363 Connections for Recording a Two-Wire Transmitter
W363-3	Model 363 Connections for External Alarm Acknowledge
W363-4	Model 363 Connections for External Alarm Annunciation
W363-5	Model 363 Connections for Thermocouple Universal Input
W363-6	Model 363 Connections for External Relay Load
W363-7	Model 363 VIEWPAC Analog Input Wiring

©1995, 1997 Moore Products Co.

MOORE PRODUCTS CO., Spring House, PA 19477-0900
An ISO 9001 registered company.

MODEL 363 REAR TERMINAL ASSIGNMENTS

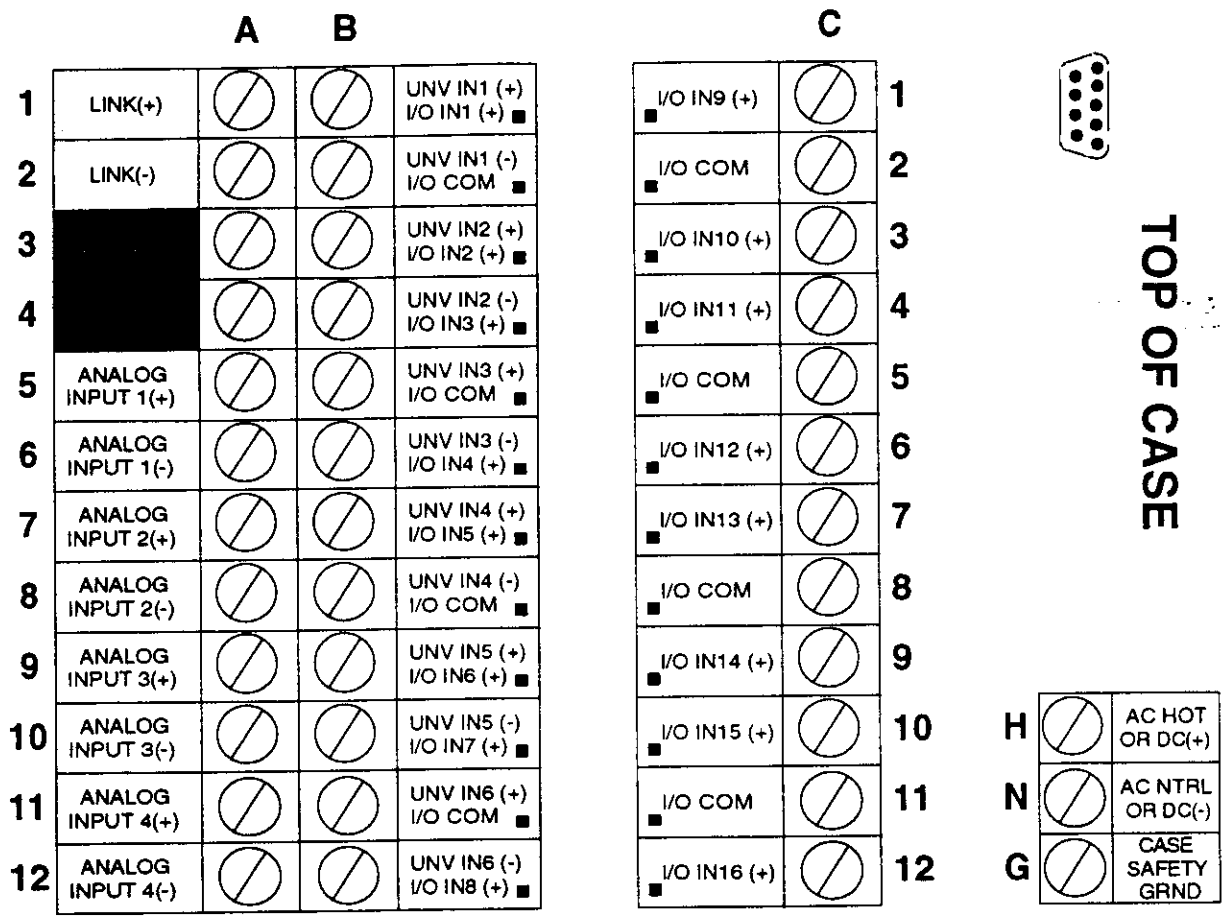

NOTES:

CONNECTION TO ■ SCREW TERMINALS DEPENDS ON OPTIONAL I/O BOARDS INSTALLED

EITHER UNIVERSAL INPUTS #1-6 OR DISCRETE I/O INPUTS #1-8 MAY BE INSTALLED IN THE STATION, NOT BOTH

ALL COMMONS INTERNALLY CONNECTED


CASE SAFETY GROUND NOT TIED TO COMMONS

ANALOG & UNIVERSAL INPUT(-) ISOLATED FROM STATION COMMON

MOORE®

DRAWING NO. : W363

MODEL 363 WIRING DIAGRAMS

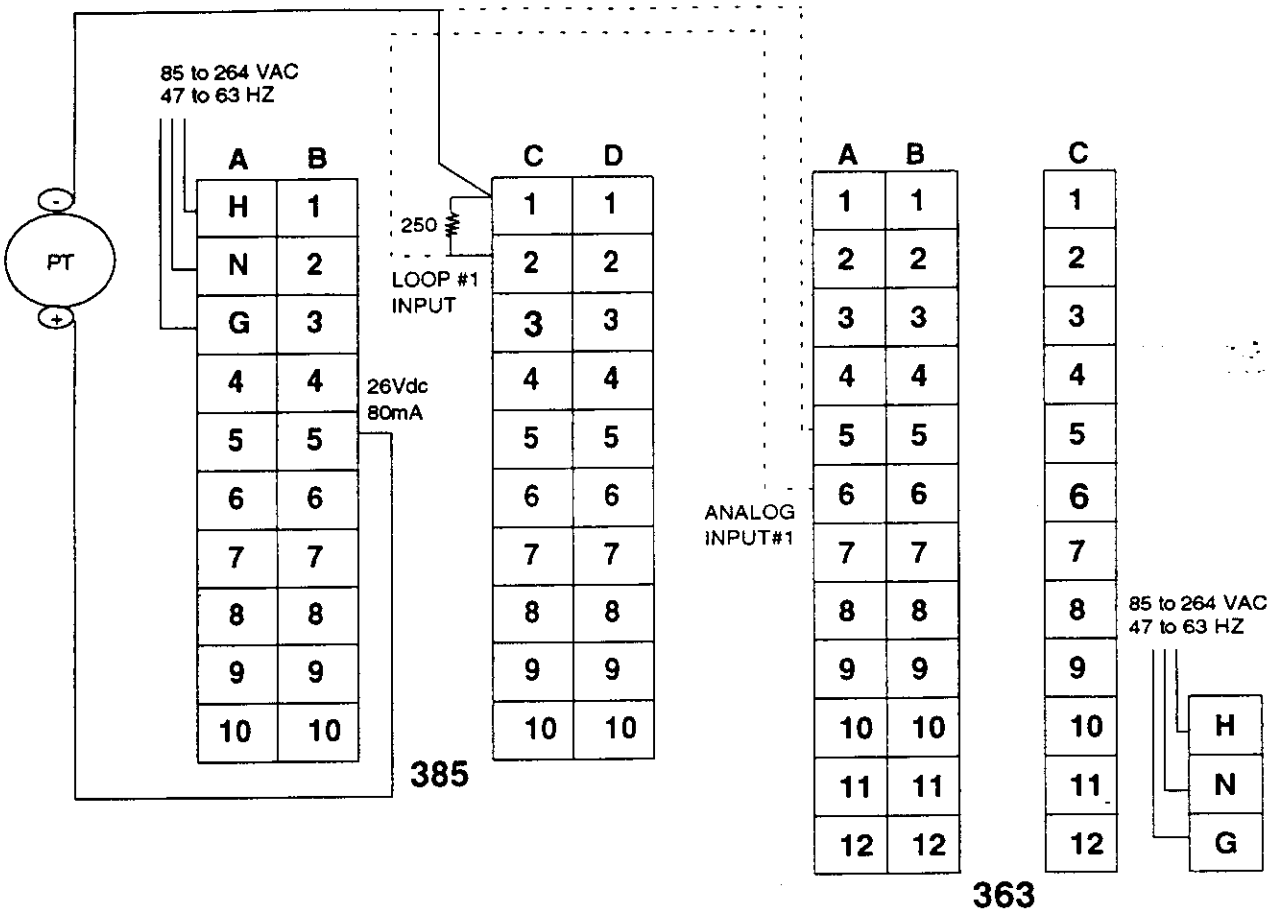

MODEL 385 - MODEL 363 CONNECTIONS FOR RECORDING A 2-WIRE TRANSMITTER

NOTES:

RECORDER ANALOG INPUTS ARE 1-5v ISOLATED INPUTS

NO RESISTOR NEEDED ON 363 IF HARDWIRED AS SHOWN, 385 AND 363 MUST BE IN CLOSE PROXIMITY

THREE SIMILAR LOOPS MAY BE CONFIGURED FOR THIS STATION USING TERMINALS A7 THRU A12 (SEE DIAGRAM W363)


INFORMATION PASSED TO RECORDER CAN BE PASSED VIA THE LOCAL INSTRUMENT LINK INSTEAD OF HARDWIRING AS SHOWN

COMPLETE 385 WIRING INFORMATION CAN BE FOUND IN DOCUMENT CG385-6

MOORE®

DRAWING NO. : W363-1

MODEL 363 WIRING DIAGRAMS

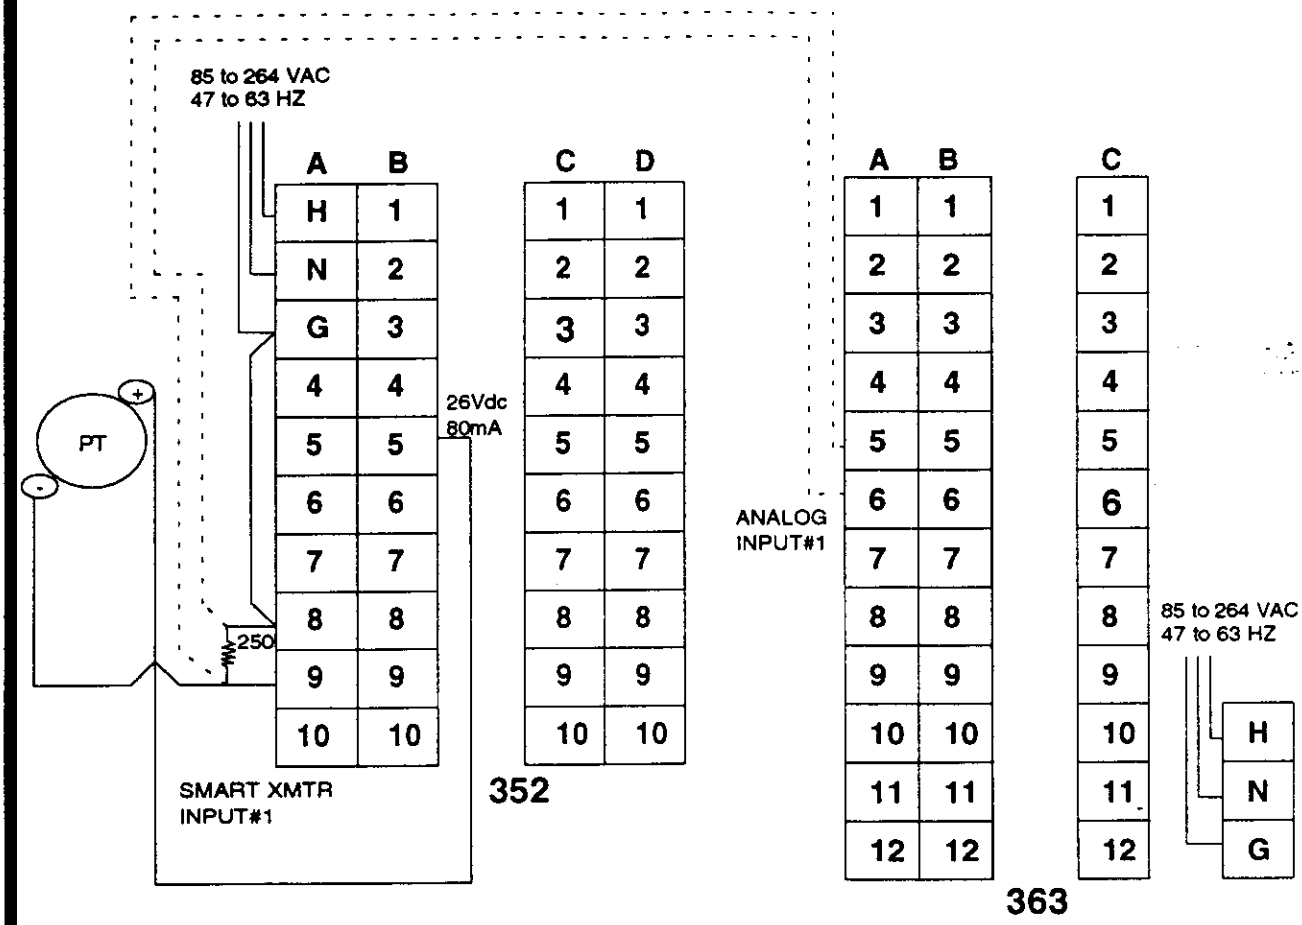

MODEL 352 - MODEL 363 CONNECTIONS FOR RECORDING A 2-WIRE TRANSMITTER

NOTES:

RECORDER ANALOG INPUTS ARE 1-5v ISOLATED INPUTS

NO RESISTOR NEEDED ON 363 IF HARDWIRED AS SHOWN, 352 AND 363 MUST BE IN CLOSE PROXIMITY

THREE SIMILAR LOOPS MAY BE CONFIGURED FOR THIS STATION USING TERMINALS A7 THRU A12 (SEE DIAGRAM W363)


INFORMATION PASSED TO RECORDER CAN BE PASSED VIA THE LOCAL INSTRUMENT LINK INSTEAD OF HARDWIRING AS SHOWN

COMPLETE 352 WIRING INFORMATION CAN BE FOUND IN DOCUMENT AD352-110

MOORE®

DRAWING NO. : W363-2

MODEL 363 WIRING DIAGRAMS

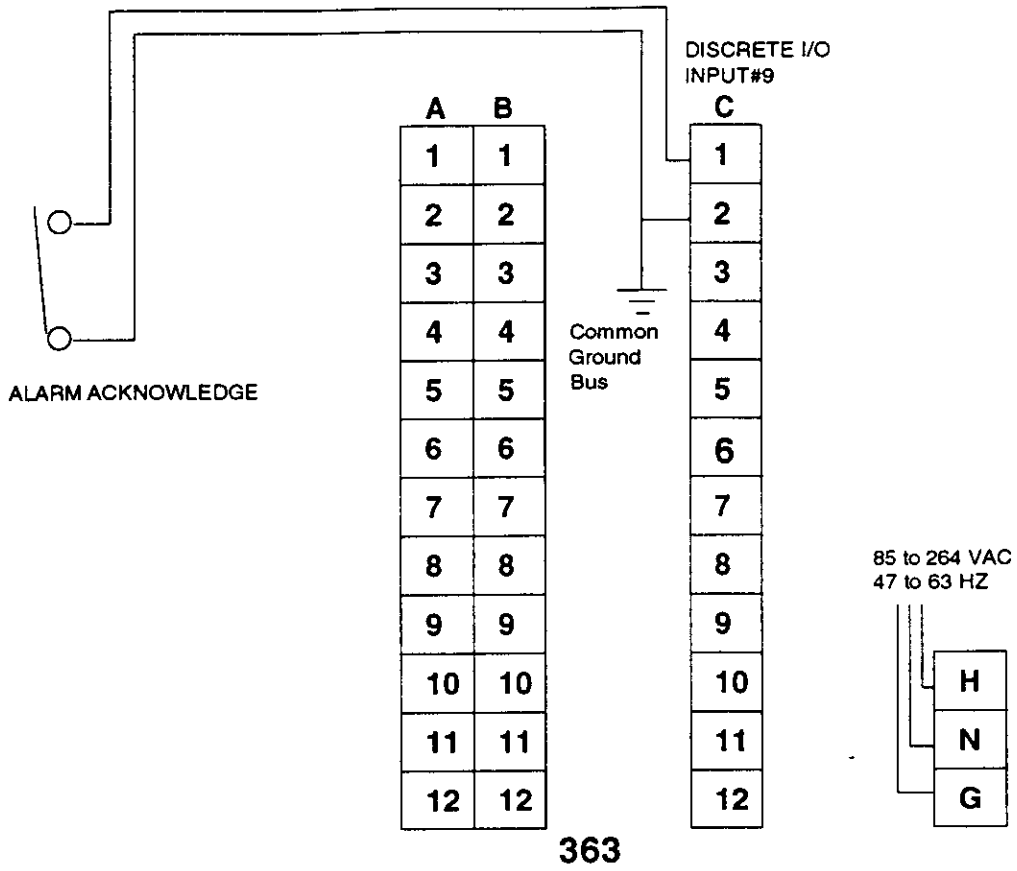

MODEL 363 CONFIGURED FOR EXTERNAL ALARM ACKNOWLEDGE

NOTES:


ONE DISCRETE I/O COMMON SHOULD BE TIED TO GROUND BUS

ACTUAL USE OF DISCRETE I/O INPUTS DEPENDENT UPON 363 CONFIGURATION

EXTERNAL ALARM ACKNOWLEDGE ONLY ONE EXAMPLE OF USE FOR DISCRETE INPUT

DISCRETE I/O POSITIVE CONNECTED TO POWER


Internal of 363 Discrete Input

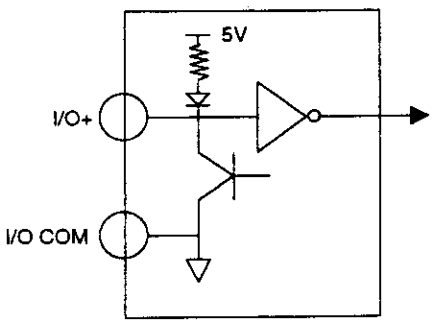

MOORE®

DRAWING NO. : W363-3

MODEL 363 WIRING DIAGRAMS

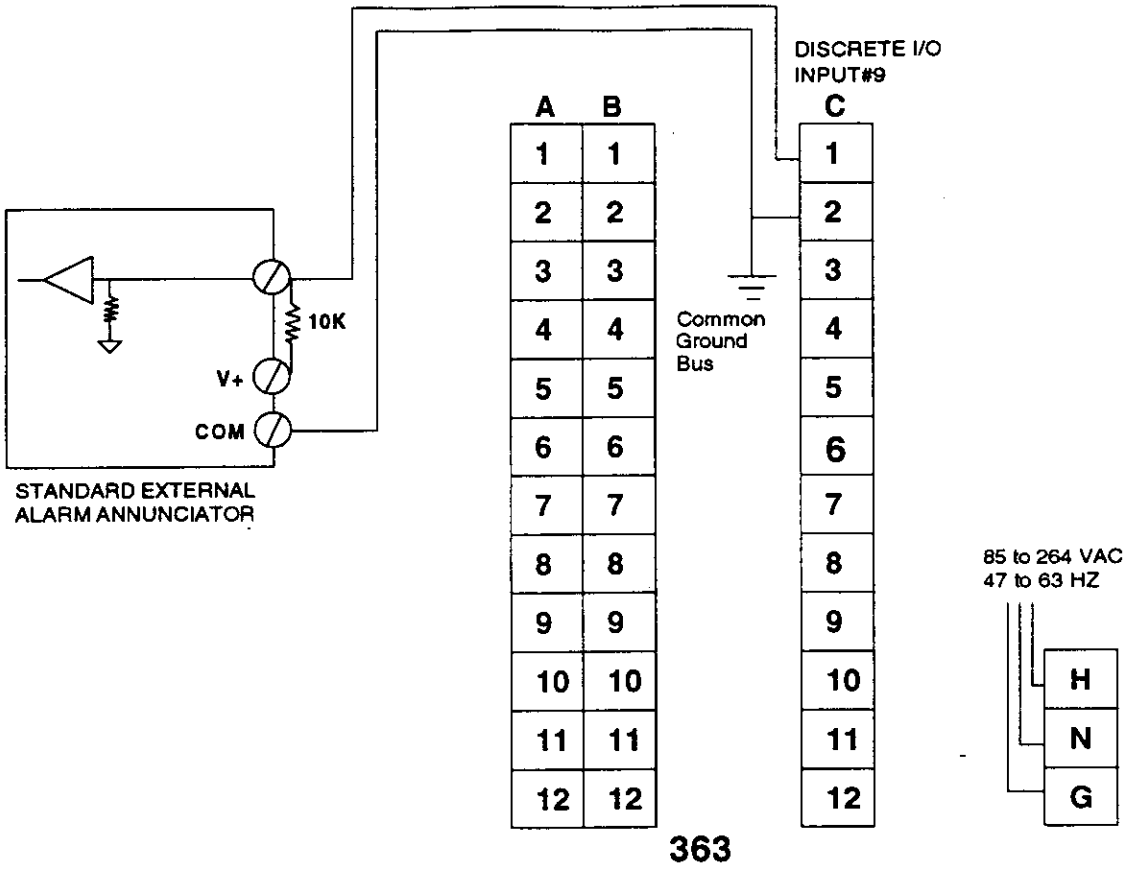

MODEL 363 CONFIGURED FOR EXTERNAL ALARM ANNUNCIATION

NOTES:


ONE DISCRETE I/O COMMON SHOULD BE TIED TO GROUND BUS

ACTUAL USE OF DISCRETE I/O OUTPUTS DEPENDENT UPON 363 CONFIGURATION

EXTERNAL ALARM ANNUNCIATION ONLY ONE EXAMPLE OF USE FOR DISCRETE OUTPUT

DISCRETE I/O POSITIVE CONNECTED TO POWER


Internal of 363 Discrete Output

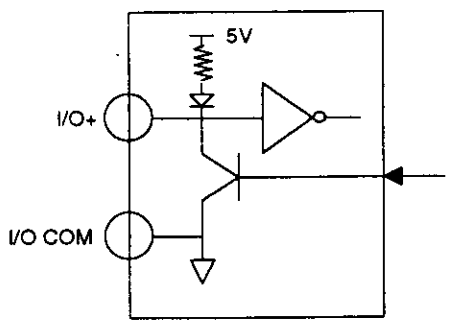

MOORE®

DRAWING NO. : W363-4

MODEL 363 WIRING DIAGRAMS

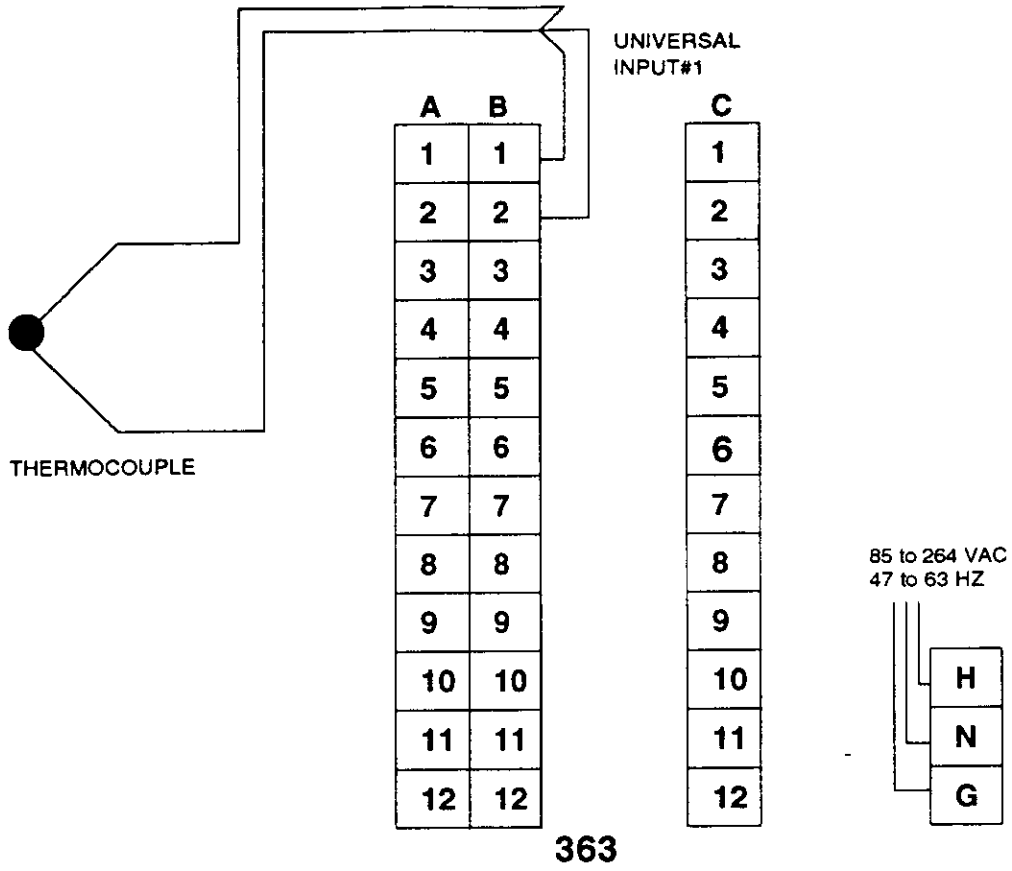

MODEL 363 CONFIGURED FOR THERMOCOUPLE INPUT

NOTES:


363 UNIVERSAL INPUTS ARE ISOLATED

UNIVERSAL INPUTS MAY BE USED FOR T/C, WIDE mv, NARROW mv AND ANALOG VOLTAGE

MOORE®

DRAWING NO. : W363-5

MODEL 363 WIRING DIAGRAMS

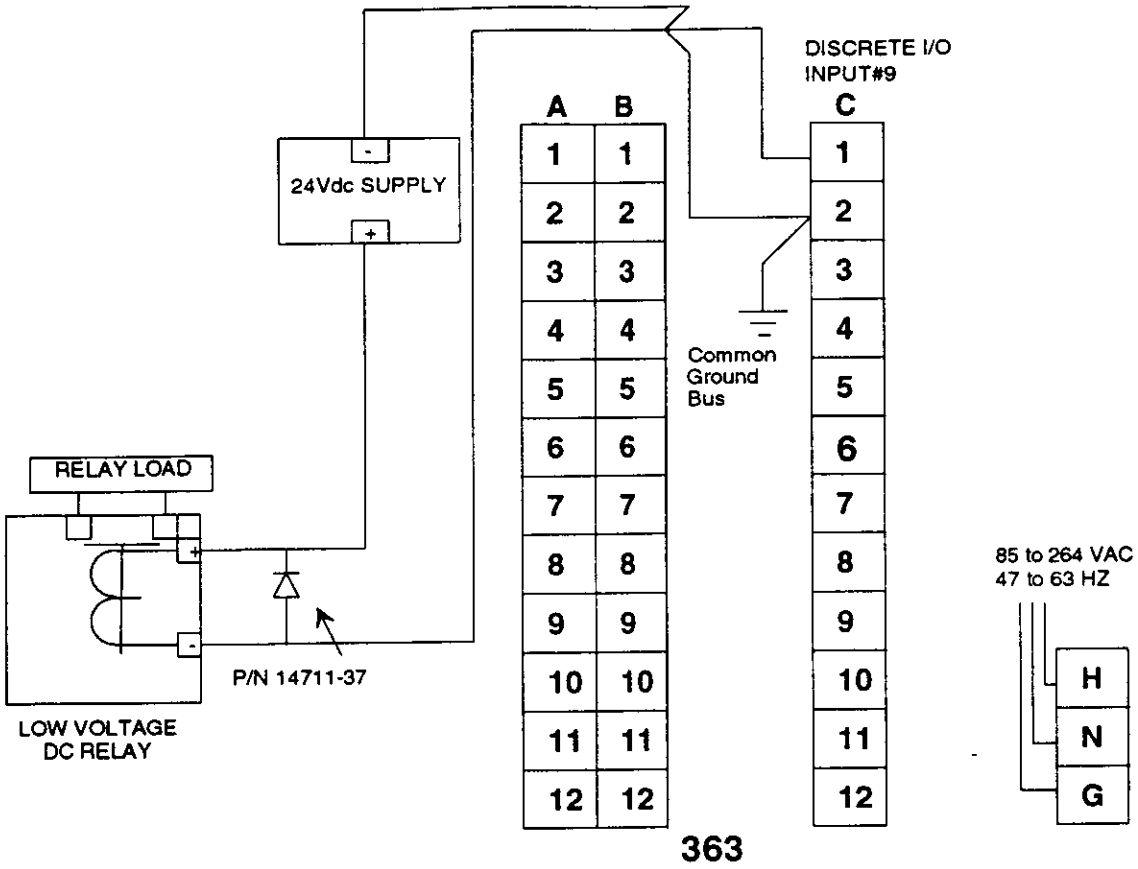

MODEL 363 CONFIGURED FOR EXTERNAL RELAY LOAD

NOTES:

ONE DISCRETE I/O COMMON SHOULD BE TIED TO GROUND BUS


ACTUAL USE OF DISCRETE I/O OUTPUTS DEPENDENT UPON 363 CONFIGURATION

EXTERNAL RELAY ONLY ONE EXAMPLE OF USE FOR DISCRETE OUTPUT

DISCRETE I/O POSITIVE CONNECTED TO POWER


TRANSIENT SUPPRESSION DIODE (IN4005 OR EQUIVALENT) REQUIRED

Internal of 363 Discrete Output

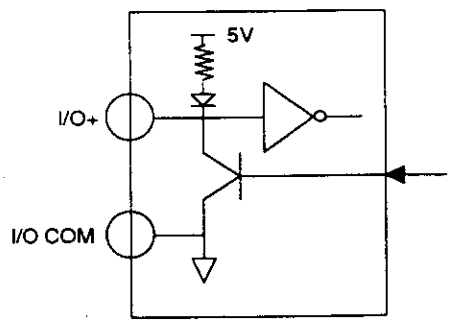

MOORE®

DRAWING NO. : W363-6

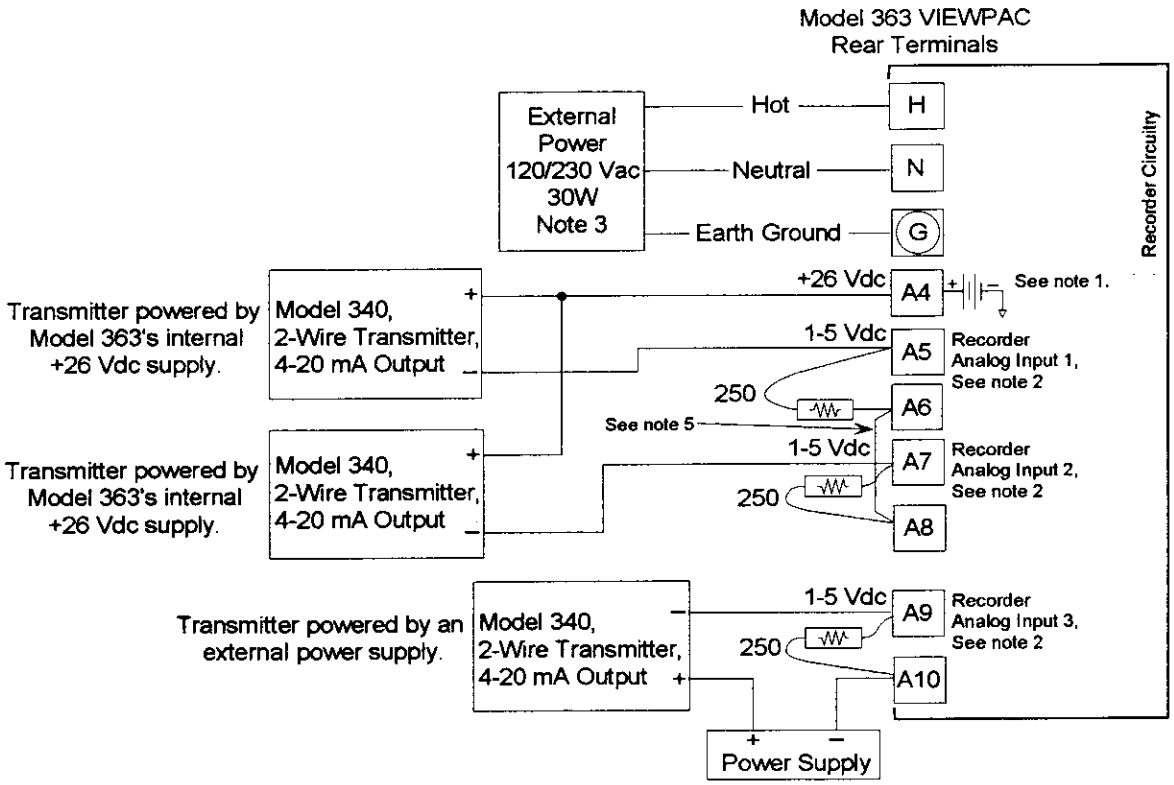

Notes:

1. Terminal A4 supplies +26 Vdc to power an external device such as a 2-wire transmitter.
2. Recorder analog inputs are isolated 1-5 Vdc, Refer to UM363-1 for other Recorder inputs.
3. Refer to SD363-1 for power requirements and detailed wiring and grounding information.
4. Range resistors shown are 250 ohms for converting 4-20 mA to 1-5 Vdc. Use other resistor values for other currents.
5. When powering a transmitter or other device from terminal A4, jumper that analog input's common (-) to A6.

DRAWING W363-7 Model 363 VIEWPAC Analog Input Wiring

MOORE®