



with silver anti-glare cone





48943.000 White (RAL9002)
LED module: 37.2W 4349lm 3000K
warm white
Switchable
Version 3
Construction size 5
Spherolit lens, wide flood

Product description
2-piece cylinder: aluminium profile, powder-coated, inside matt silver coated. Cone integrated in the centre: polymer, black.
Ceiling fixture with canopy: metal/polymer, white.
Through-wiring possible.
Connection cable, white, L 4m. Strain relief.
Control gear.
LED module: high-power LEDs.
Collimating lens made of optical polymer.
Cut-off angle 30°.
Weight 3.63kg

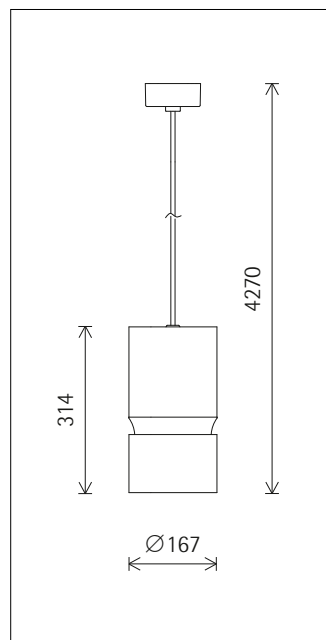

CE IP 20 UK

UGR
16



Beam angle
C0 48°

UGR glare evaluation
C0 10

Technical data

Luminous flux of the luminaire	3153lm
Connected load	41.0W
Luminaire efficacy	77lm/W
Colour deviation	1.5 SDCM
Colour rendition index	CRI 92
Lumen maintenance	L90/B10 >50000h L90 >100000h
LED failure rate	0.1% >50000h
Dimming range	--
Dimming method	--
TLA (Temporal Light Artefacts)	SVM ≤ 0.4; PstLM ≤ 1
LMF	E
Standby power per control gear	--
Luminaires per circuit breaker B16	44

For your regional contact in the ERCO
Sales network click here
www.erco.com/contact

Planning data

48943.000 LED module: 37.2W 4349lm 3000K warm white
 Connected load P: 41.0 W
 Connected load per 100lx P*: 1.2 W/m²
 Number of luminaires per 100lx n*: 3.0 1/100m²

48943.000 LED module: 37.2W 4349lm 3000K warm white
 Number of luminaires per 100m² for
 100lx 200lx 300lx 500lx
 4 7 10 16

48943.000 LED module: 37.2W 4349lm 3000K warm white
 Module (m) 1.2x1.8 1.8x1.8 1.8x2.4 2.4x2.4
 Illuminance E_n (lx) for module (m) 1533 1022 766 575

Melanopic light effect

Art. no. Spectrum MR MDER
 48943.000 (direct) 3000K CRI 92 0.53 0.48

MR Melanopic factor (of luminous radiation) a_{mel,v}
 MDER Melanopic Daylight Efficacy Ratio [gamma]_{mel,v,D65}

Multiplying the illuminance with the melanopic daylight efficacy ratio MDER gives the melanopic equivalent daylight illuminance MEDl. (MEDl = Melanopic Equivalent Daylight Illuminance [lx] E_{v, mel, D65} [lx]).

Cleaning (a)	1				2				3			
	P	C	N	D	P	C	N	D	P	C	N	D
Ambient conditions												
LMF	0.96	0.94	0.90	0.86	0.93	0.91	0.86	0.81	0.92	0.90	0.84	0.79

Hours of operation (h)	1000	5000	10000	20000	30000	40000	50000
	LLMF	1.00	0.99	0.98	0.96	0.94	0.92
LSF	1	1	1	1	1	1	1

MF LMFxRSMFxLLMFxLSF
 MF Maintenance Factor
 LMF Luminaire Maintenance Factor
 RSMF Room Surface Maintenance Factor
 LLMF Lamp Lumens Maintenance Factor
 LSF Lamp Survival Factor
 P Room pure
 C Room clean
 N Room normal
 D Room dirty

Data according to regulations

2019/2020/EU supplemented by 2021/341/EU and 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance

This product contains a light source of efficiency class E
 Due to thermal and photometric properties as well as to protect electronic components from ESD (electrostatic discharge) the light source cannot be changed by the customer.

ID EPREL: 1784428
 Model identifier: 3000068218
 Download data sheets for control gear and disassembly instructions at www.erco.com/slr

Planning data

Technical data in accordance with international norms and standards

IEC 60598	Luminaires – Part 1+2: general requirements, specific requirements and tests
IEC 62031	LED modules for general lighting – safety requirements
IEC 62471	Photobiological safety of lamps and lamp systems
EN 13032-4	Light and lighting – measurement and representation of photometric data
CIE 13	Method of measuring and specifying colour rendering properties of light sources

All technical data is subject to industry-standard tolerances.

Also see www.erco.com/erco-led

For explanations of the symbols and abbreviations used and other general information, see www.erco.com/symbols

Accessories

**80930.000**

Pendant tube

Metal, white powder-coated.

Weight 0.66kg

CE UK

