
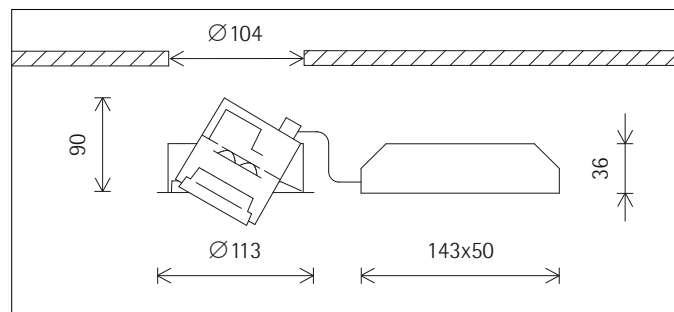


53874.000 White (RAL9002)
LED module: 6W 602lm 3000K warm white
Casambi Bluetooth
Version 4
Construction size 3
Covered mounting detail
Flush mounting is possible with accessory
Spherolit lens, oval flood

Product description

Luminaire: cast aluminium, white (RAL9002) powder-coated, with connection cable L 850mm. 0°-30° tilt, 360° rotation.
Mounting ring: Polymer, white (RAL9002). Expanding spring fixing for ceiling thicknesses of 1-25mm.
2-pole terminal block.
Includes ERCO Casambi control gear.
LED module: high-power LEDs.
Collimating lens made of optical polymer.
Lens rotatable through 360°.
Control via Casambi app (Android/iOS) with Bluetooth Low Energy (BLE)-capable mobile devices or "Casambi Ready" products.
Approved for use as emergency lighting according to IEC / EN 60598-2-22.
Safety class II
Weight 0.56kg
Through-wiring possible on request.



h(m)	E(lx)	D(m)	C0	C90
			60.3°	14.4°
1.0	1415	1.16	0.25	
2.0	354	2.32	0.51	
3.0	157	3.48	0.76	
4.0	88	4.65	1.01	
5.0	57	5.81	1.26	

Technical data

Luminous flux of the luminaire	469lm
Connected load	7.9W
Luminaire efficacy	59lm/W
Colour deviation	1.5 SDCM
Colour rendition index	CRI 97
Lumen maintenance	L90/B10 >50000h L90 >100000h
LED failure rate	0.1% >50000h
Dimming range	1%-100%
Dimming method	CCR
TLA (Temporal Light Artefacts)	SVM ≤ 0.1; PstLM ≤ 1
LMF	E
Standby power per control gear	0.4W
Luminaires per circuit breaker B16	401

For your regional contact in the ERCO
Sales network click here
www.erco.com/contact

Technical Region: 220-240V 50/60Hz
We reserve the right to make technical
and design changes.
Edition: 28.04.2026
Current version under
www.erco.com/53874.000

Planning data

Melanopic light effect

Art. no.	Spectrum	MR	MDER
53874.000 (direct)	3000K CRI 97	0.57	0.52

MR	Melanopic factor (of luminous radiation) $a_{mel,v}$
MDER	Melanopic Daylight Efficacy Ratio $[\gamma]_{mel,v,D65}$

Multiplying the illuminance with the melanopic daylight efficacy ratio MDER gives the melanopic equivalent daylight illuminance MEDl. (MEDl = Melanopic Equivalent Daylight Illuminance [lx] $E_{v, mel, D65}$ [lx]).

Cleaning (a)	1				2				3			
Ambient conditions	P	C	N	D	P	C	N	D	P	C	N	D
LMF	0.96	0.94	0.90	0.86	0.93	0.91	0.86	0.81	0.92	0.90	0.84	0.79

Hours of operation (h)	1000	5000	10000	20000	30000	40000	50000
LLMF	1.00	0.99	0.98	0.96	0.94	0.92	0.90
LSF	1	1	1	1	1	1	1

MF	LMFxRSMF $\times$ LLMF $\times$ LSF
MF	Maintenance Factor
LMF	Luminaire Maintenance Factor
RSMF	Room Surface Maintenance Factor
LLMF	Lamp Lumens Maintenance Factor
LSF	Lamp Survival Factor
P	Room pure
C	Room clean
N	Room normal
D	Room dirty

Data according to regulations

2019/2020/EU supplemented by 2021/341/EU and 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance

This product contains a light source of efficiency class F
Due to thermal and photometric properties as well as to protect electronic components from ESD (electrostatic discharge) the light source cannot be changed by the customer.

ID EPREL: 696982
Model identifier: 3000056357
Download data sheets for control gear and disassembly instructions at www.erco.com/slr

Technical data in accordance with international norms and standards

IEC 60598	Luminaires – Part 1+2: general requirements, specific requirements and tests
IEC 62031	LED modules for general lighting – safety requirements
IEC 62471	Photobiological safety of lamps and lamp systems
EN13032-4	Light and lighting – measurement and representation of photometric data
CIE 13	Method of measuring and specifying colour rendering properties of light sources



All technical data is subject to industry-standard tolerances.
Also see www.erco.com/erco-led

For explanations of the symbols and abbreviations used and other general information, see www.erco.com/symbols


Accessories




70851.000
Spherolit lens spot
made of optical polymer.
Replacement without tools.




70854.000
Spherolit lens oval flood
made of optical polymer.
Replacement without tools.




70852.000
Spherolit lens flood
made of optical polymer.
Replacement without tools.




70978.000
Spherolit lens extra wide flood
made of optical polymer.
Replacement without tools.




70853.000
Spherolit lens wide flood
made of optical polymer.
Replacement without tools.



82935.000
Mounting ring
For flush mounting of recessed
luminaires size 3.
Polymer, white (RAL9002). Mounting
for ceiling thicknesses of 12.5-25mm.
The recess depth of the luminaire
increases by 2mm.
Weight 0.08kg



Accessories

**82950.000**

Mounting plate for panelled ceilings
Metal, white (RAL9002) powder-coated.
Individual design of mounting plates
according to ceiling type and luminaire.
Quote ceiling type and dimensions.
Weight 0.80kg

**88290.000**

Compensation set
for oversize ceiling cut-out.
Lock ring: Sheet steel, galvanised.
Mounting for ceiling thickness of min.
10mm.
Cover ring: Metal, white.
when ordering, please state the
diameter of the existing ceiling cutout
and the diameter of the luminaire.
Weight 0.40kg

**83980.000**

Cover ring
Metal, white. For covering the gap
where ceiling cut-outs are too big.
Inner and outer diameter to be
specified when placing order.
Weight 0.40kg