Siemens S7-1200

CPU 1212C AC/DC/Relay

How to use PLC Simulator

In Siemens TIA you can practice PLC Logics without physical PLC !



Learning Made Easy

www.nfiautomation.org




Step 1- Open Siemens TIA

Make a demo project in Siemens TIA

In the below example we have made a timing circuit to actuate the output with a delay of 5 seconds.

TIA Portal V13

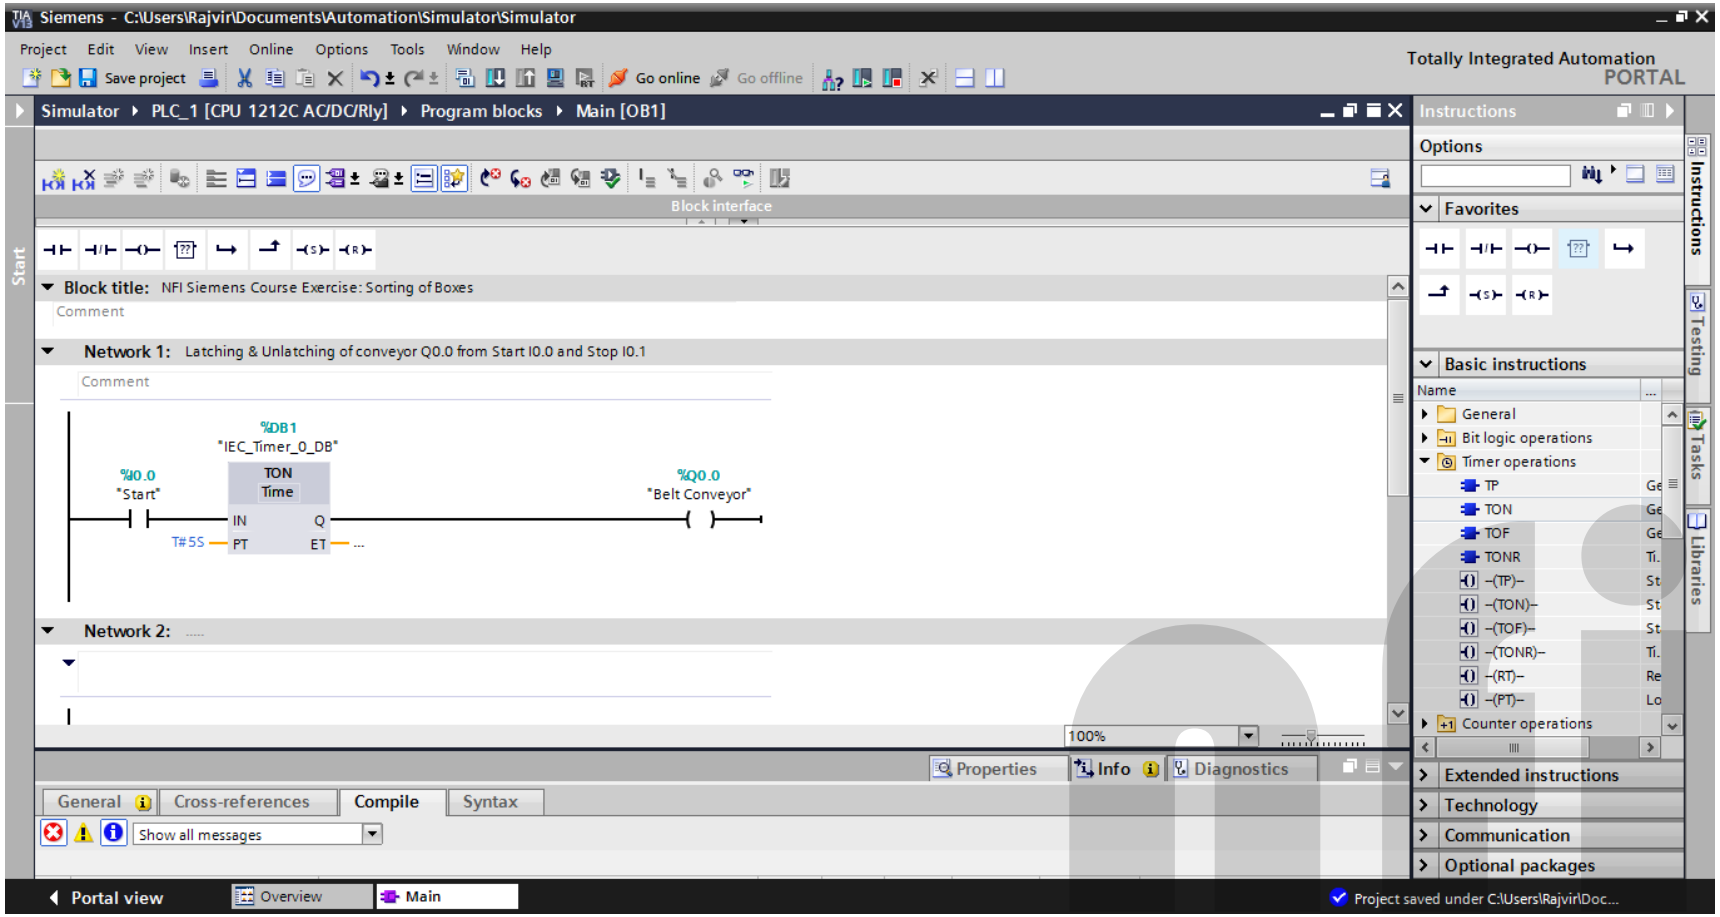




Step 2- Open Siemens PLCSIM

Install and open Siemens PLCSIM

This software comes along with Siemens Software Pack or you can download from the Siemens website

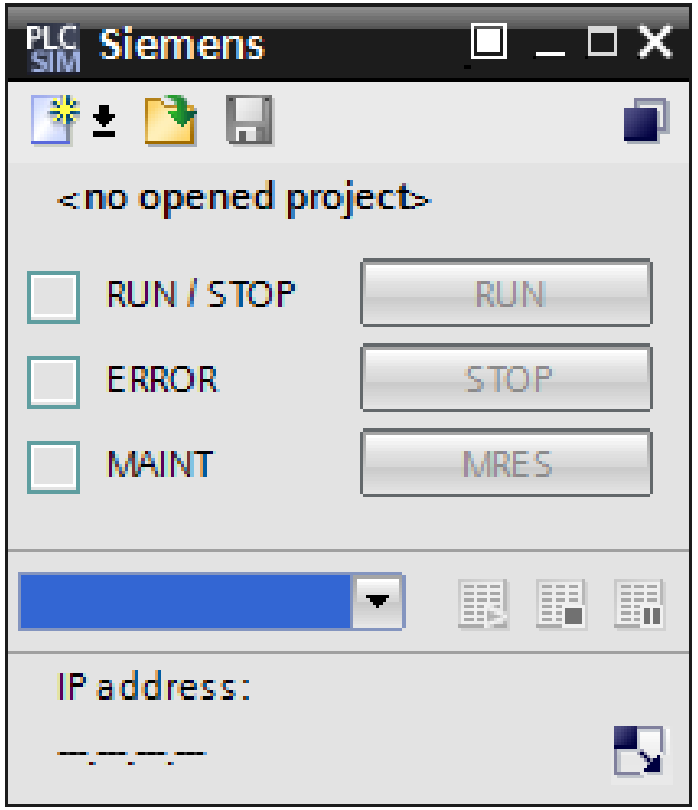


S7-PLCSIM V13

Step 3- Make a sample Logic




Write your ladder Logic – **Compile it** to make sure it's error free !

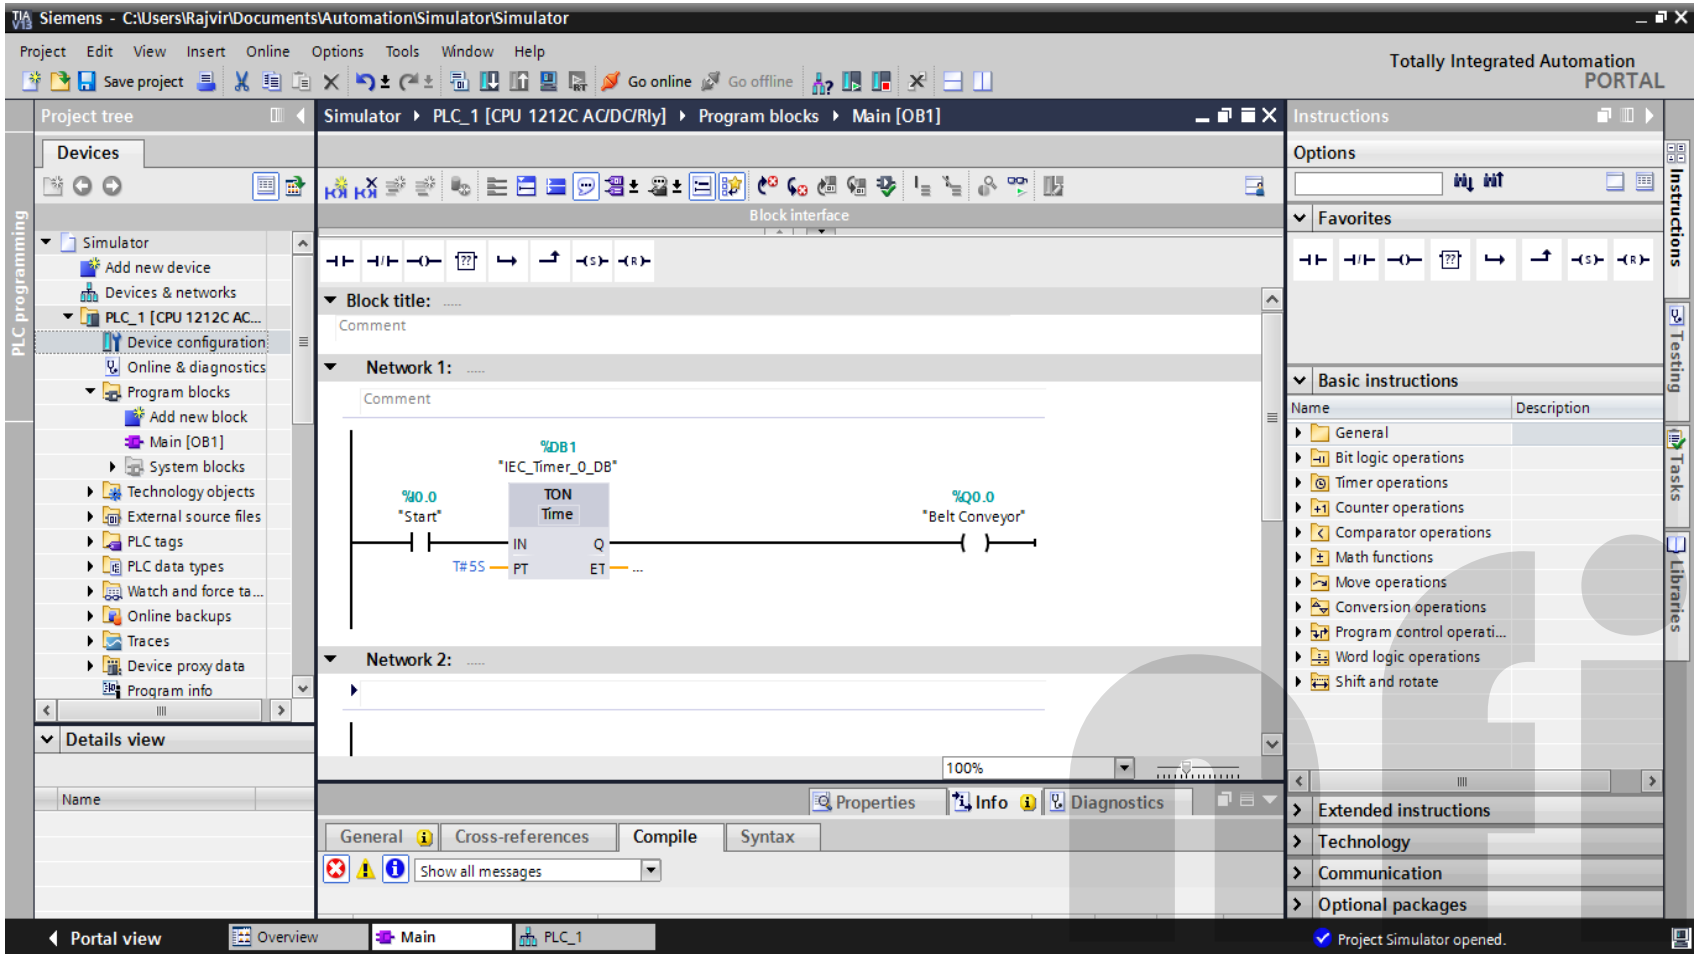

Step 4- Add your PLC Hardware




Navigate to **Device Configuration** and drag your **PLC** in main window which you want to simulate!

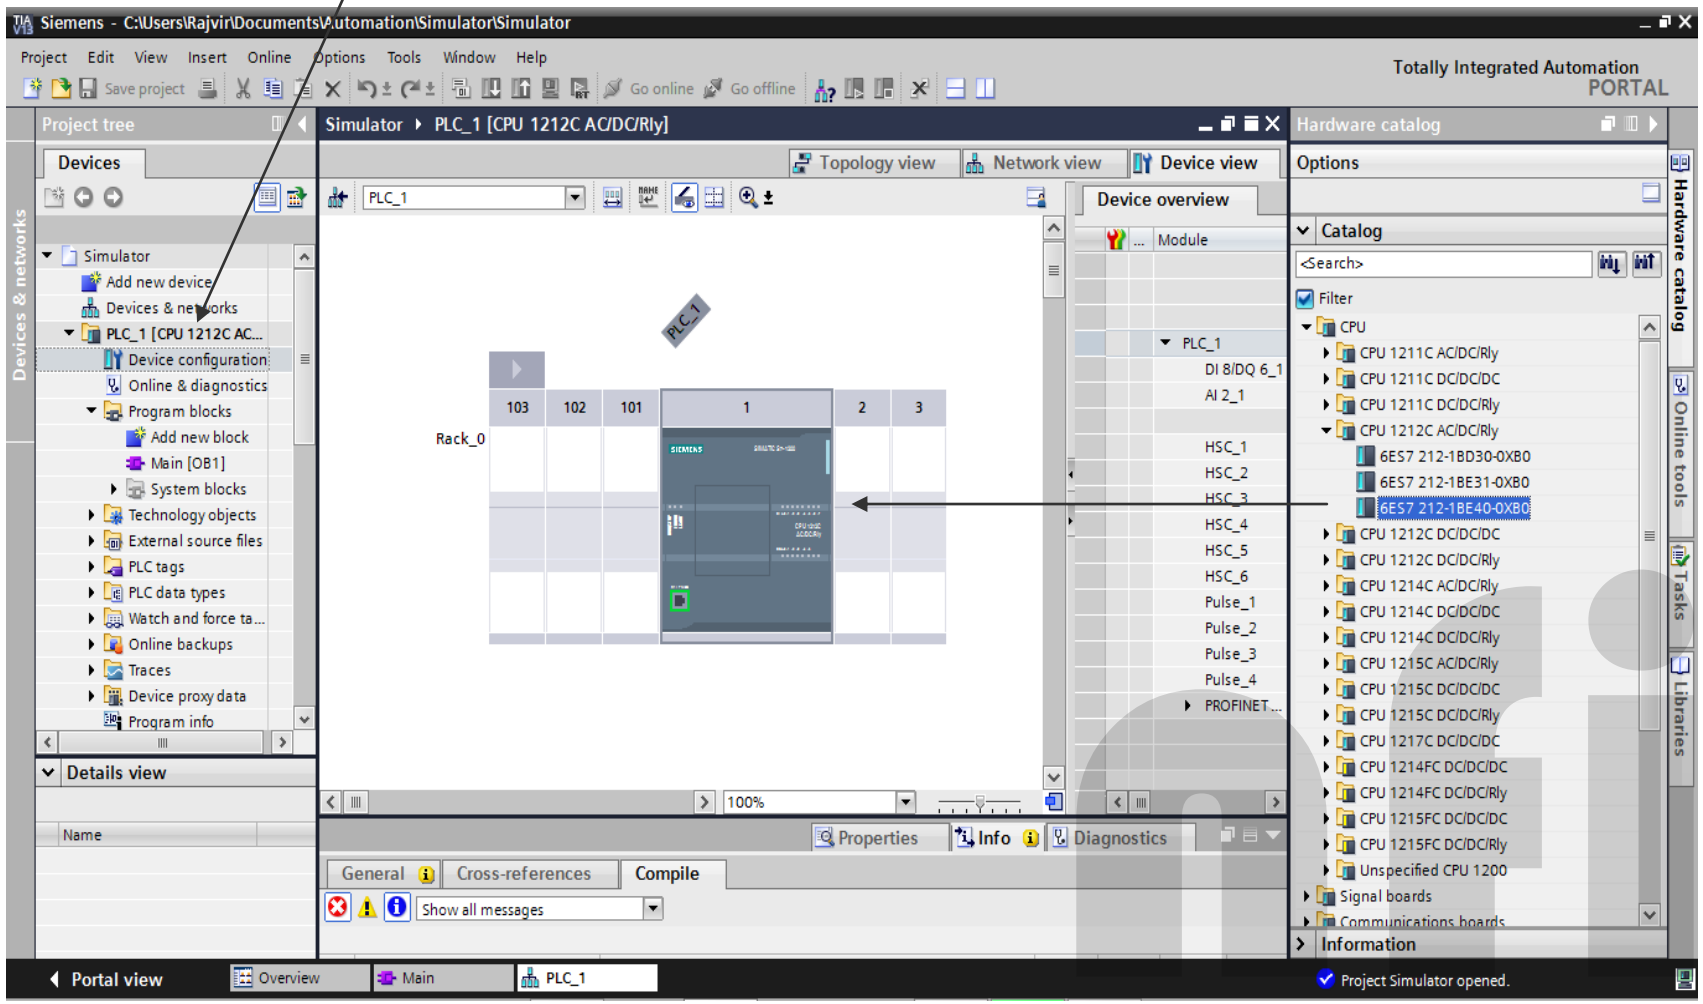

Step 5- Start the Simulation



In Siemens TIA window Navigate to
Online -> Simulation -> Start

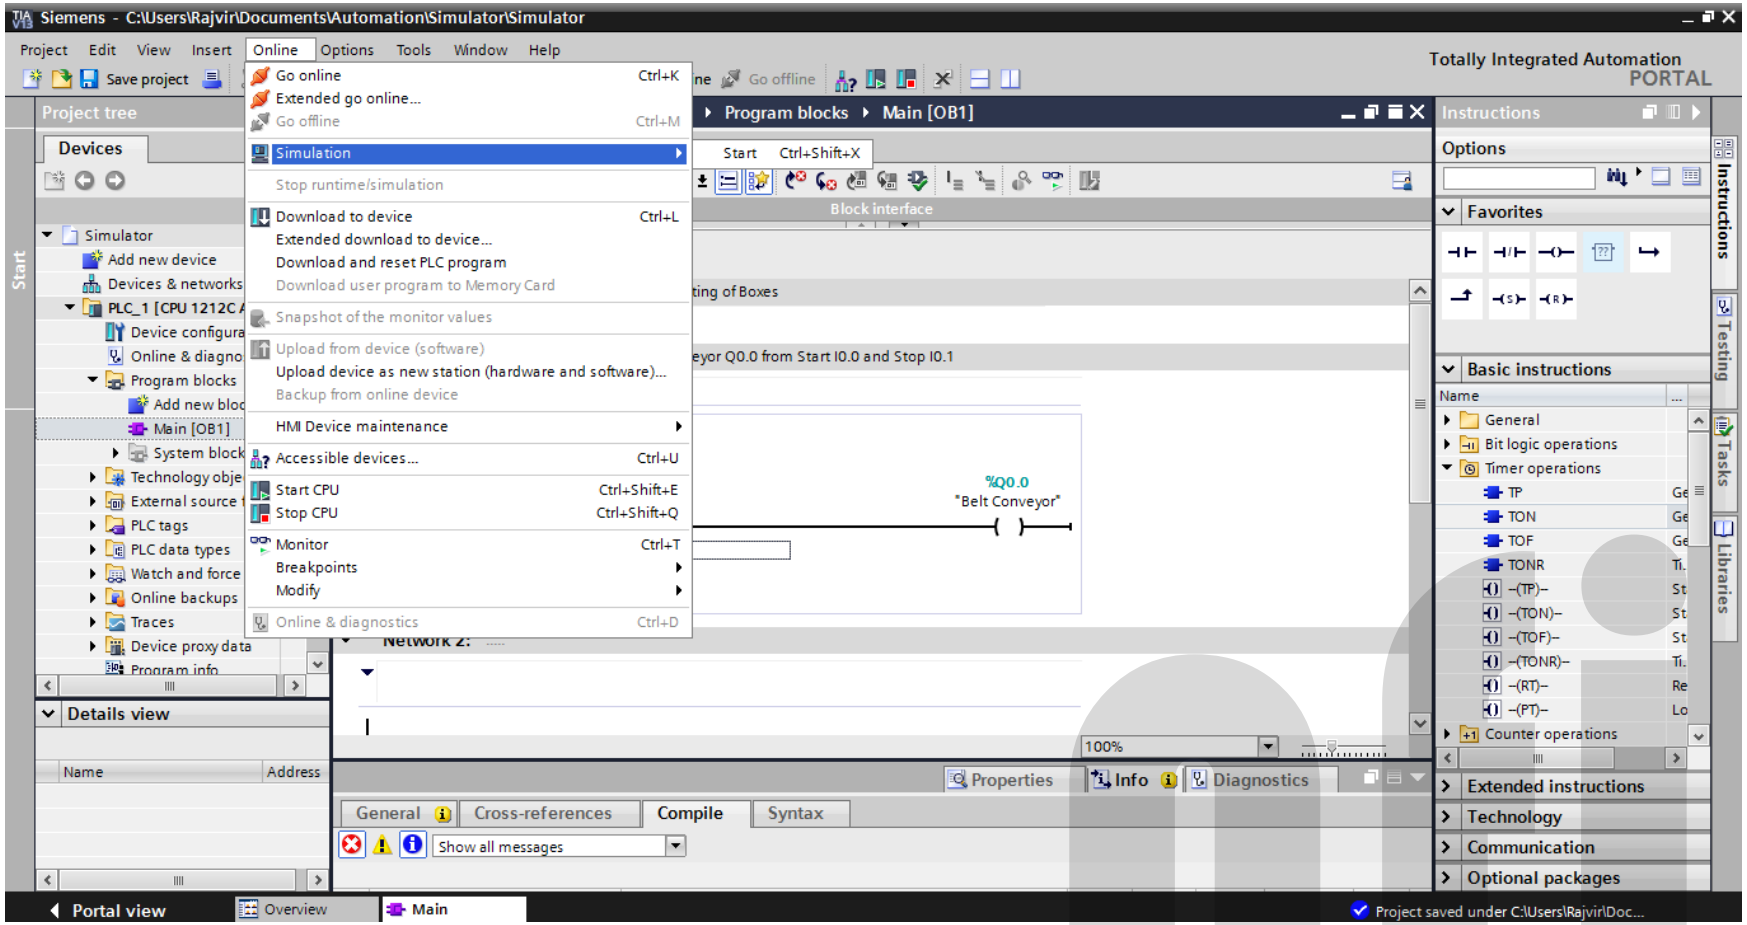


Step 6- Detect your simulated PLC



You will notice two windows open automatically.

Make sure PG/PC Interface is selected to PLC SIM S71200/ S7-1500

You will notice that it will assign the IP address to the Simulator PLC

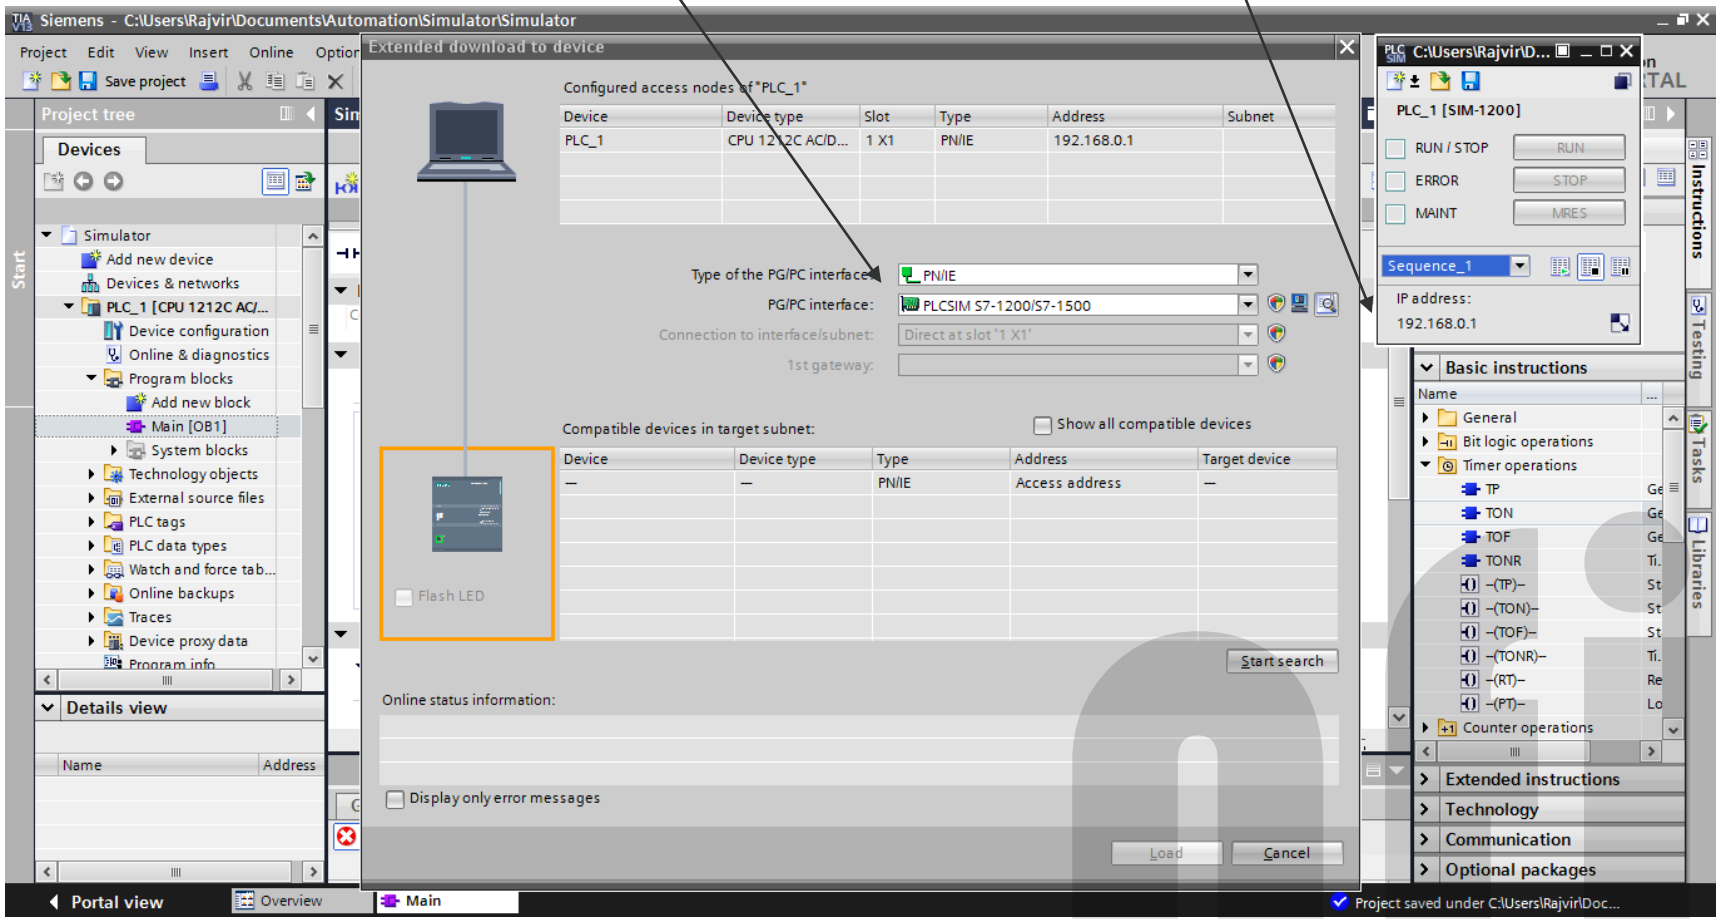




Step 7- Select your Simulated PLC

Click on "**Start Search**" in this window

You will see your **simulated PLC** in this list.

Click on '**Start Search**" to locate your simulated PLC.

Then click '**Load**" to download the Program in your PLC

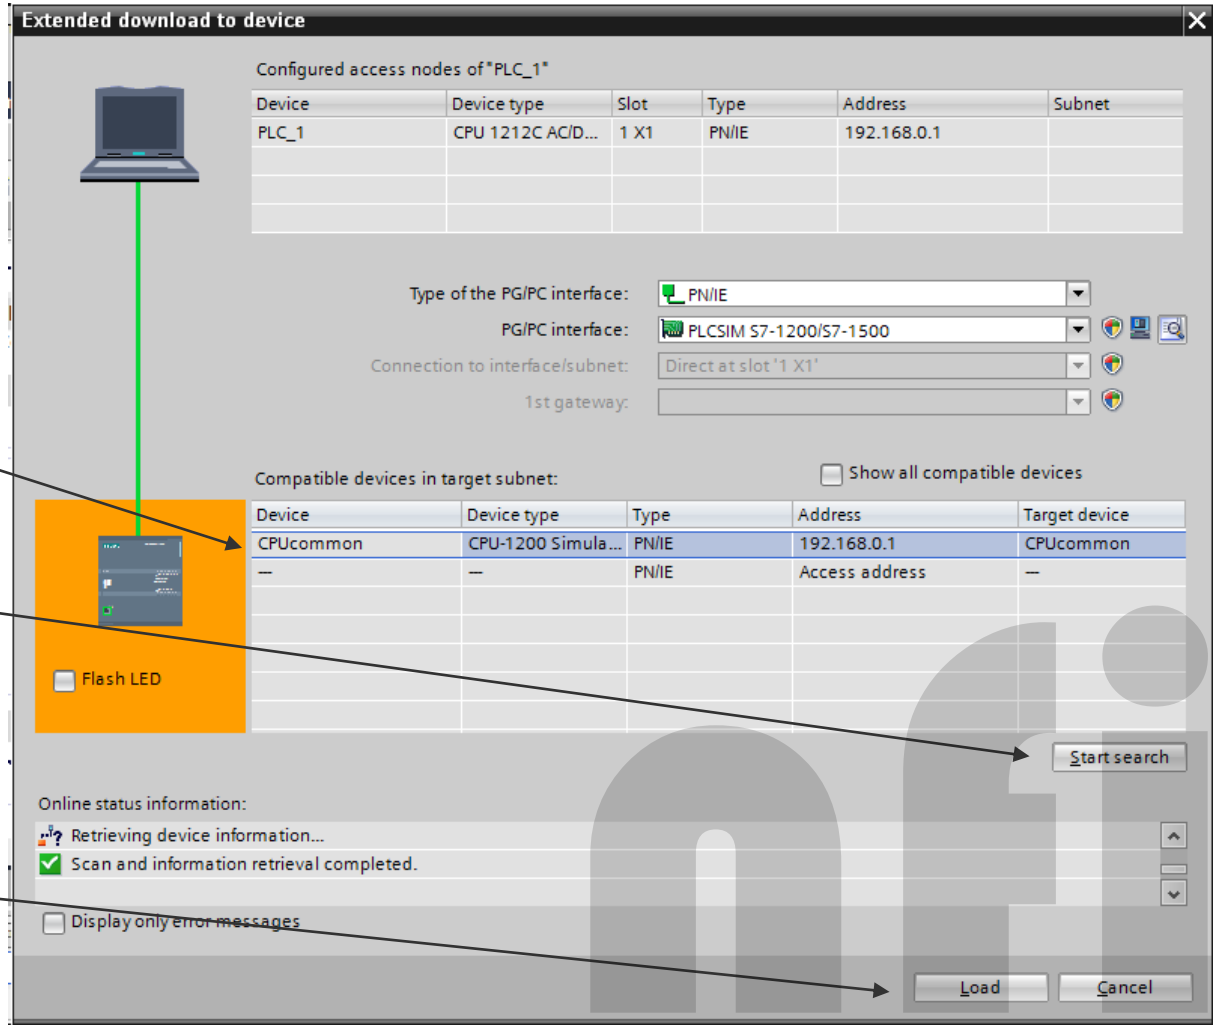




Step 8- Download the program in PLC


The program will **compile**....



Click on "**Load**"

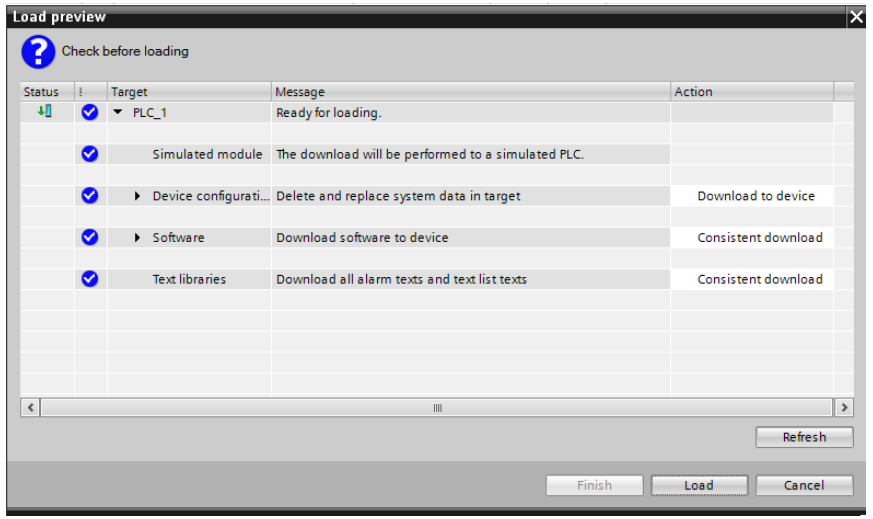


Then click "**Finish**"

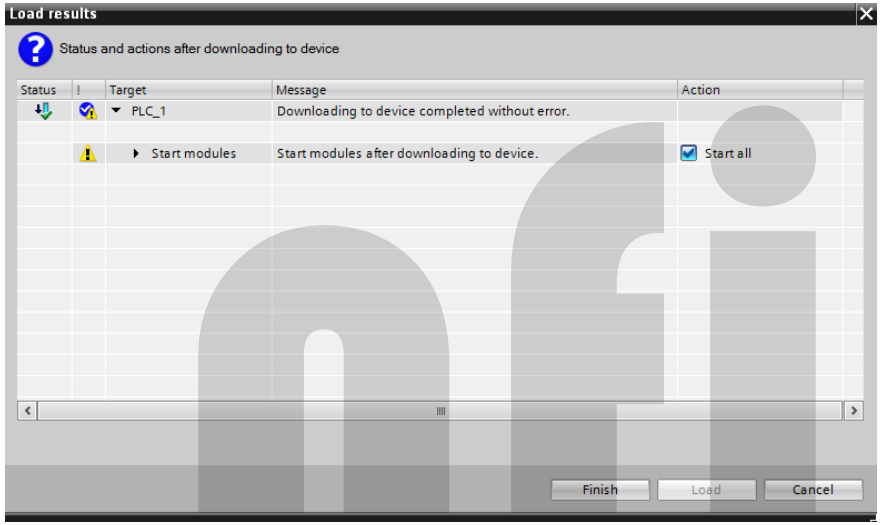

Step 9- Enable Monitoring!




Then you will see this window which ensure the program is **successfully downloaded to your simulated PLC. Then click on this symbol (Monitoring)**

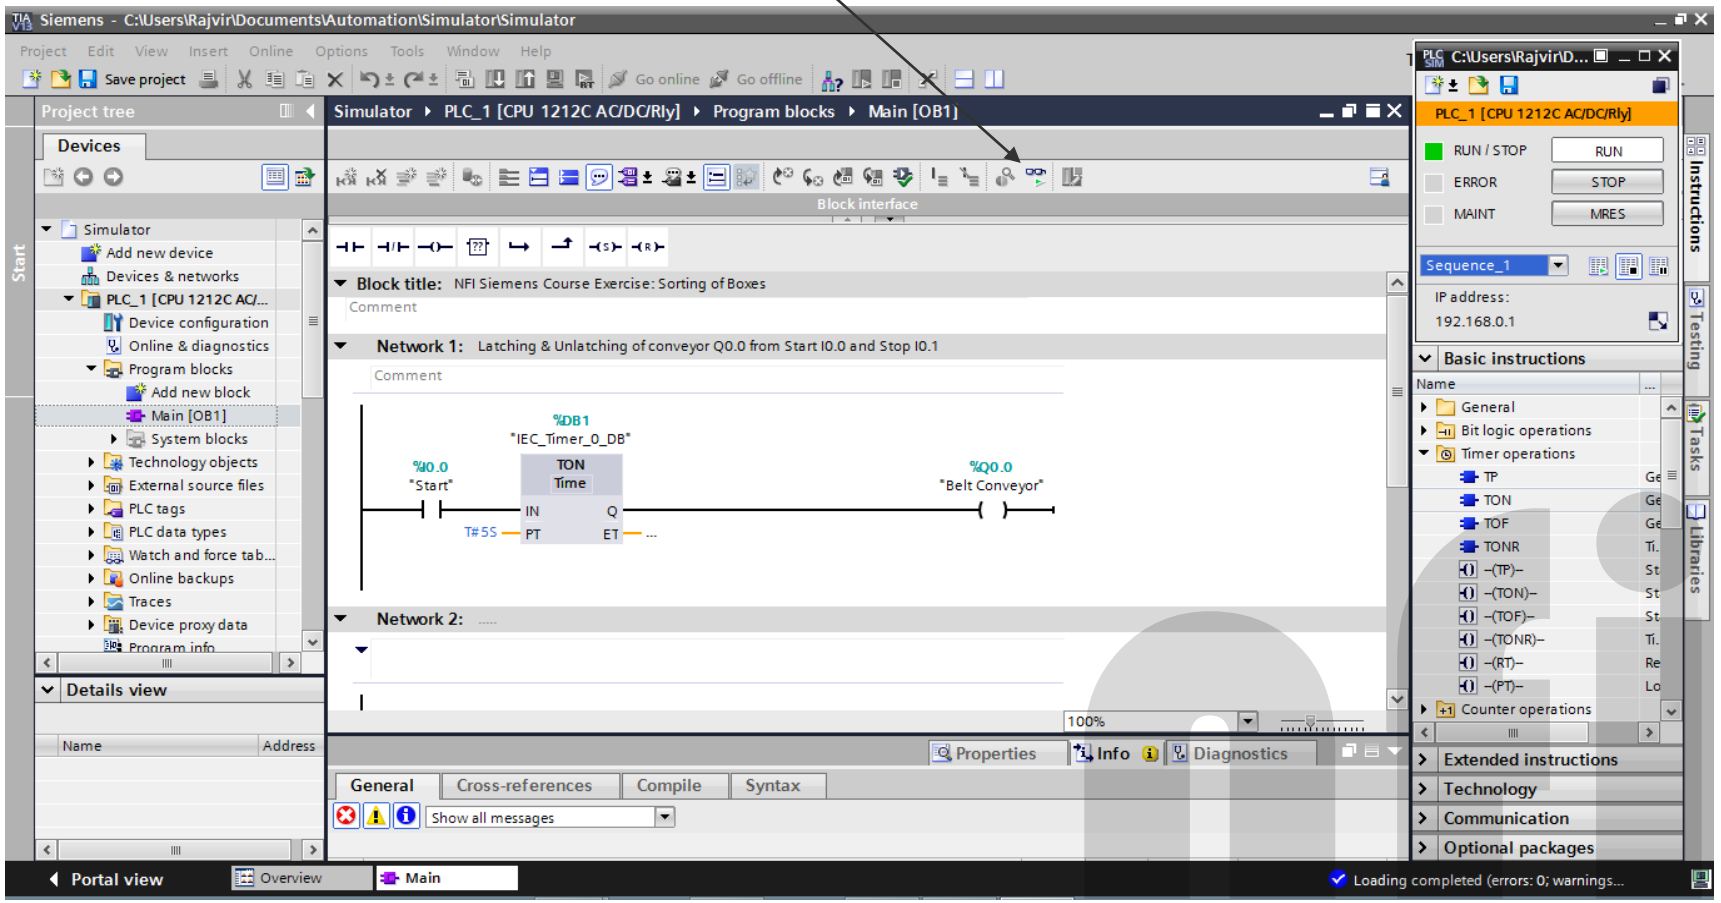

Step 10- Simulator is ready to use!


Then you will see this window which **read/write** the status of **simulated PLC.**

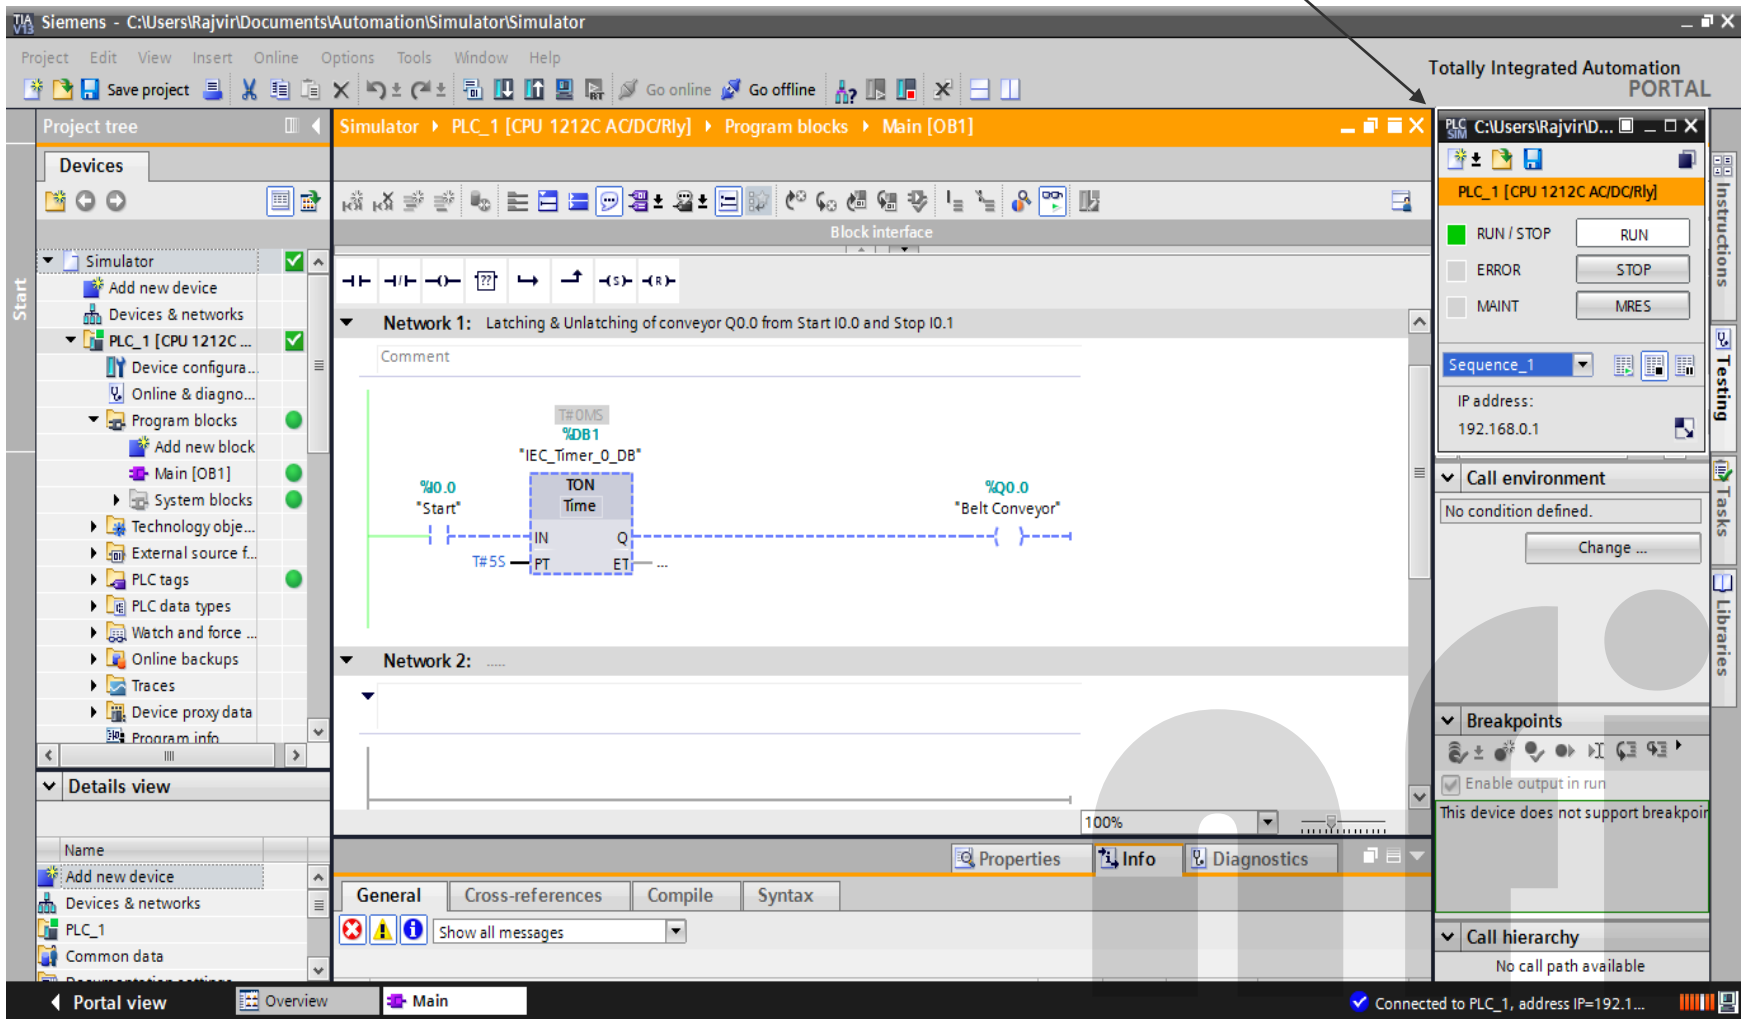

Step 11- Test trial your program




Take a trial of your Program. To activate the bit : **Right Click and navigate to Modify to 1**

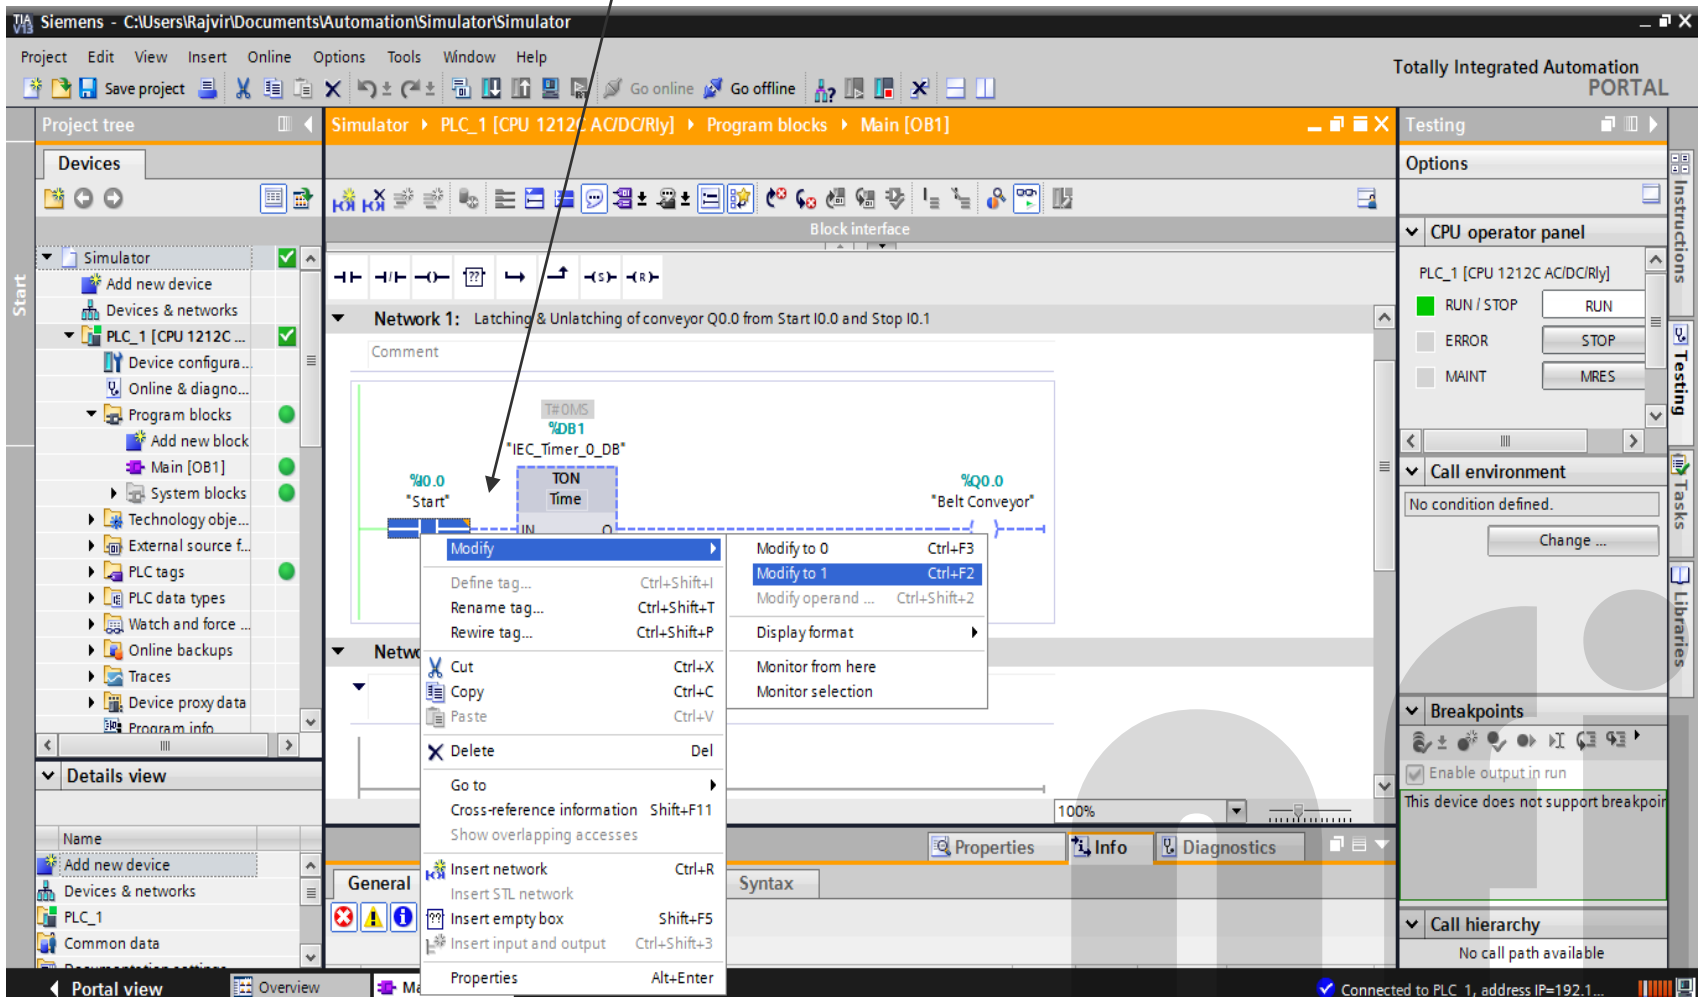




Step 12- Test your other logics !

Notice the behaviour of your program. It will act like being run in real PLC.

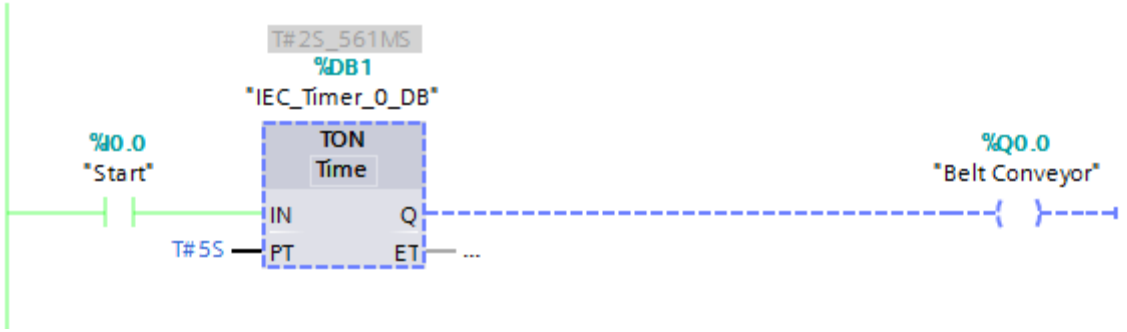

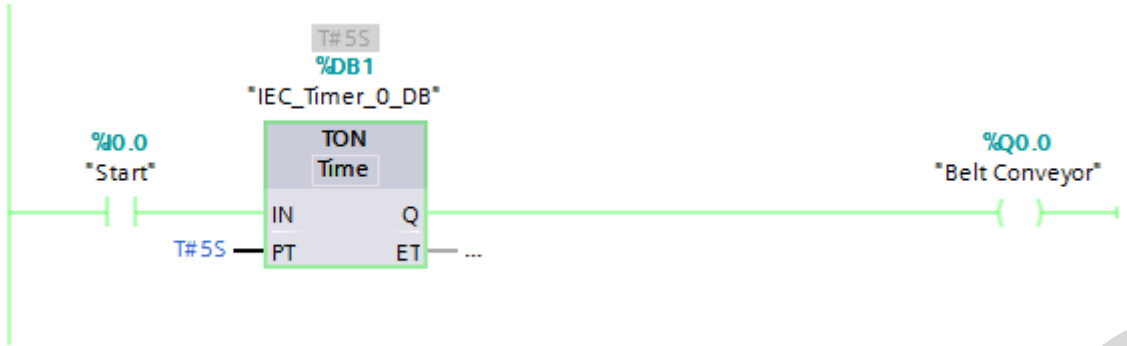

You can try all the logics solved in the course or quiz in

Siemens TIA PLC Simulator

Important Information

- The trial version of Siemens TIA PLC SIM works for only 7 days
- To extend your trial version you must buy valid license

Thank you

Get copy of this presentation in the course!



Learning Made Easy

www.nfiautomation.org