
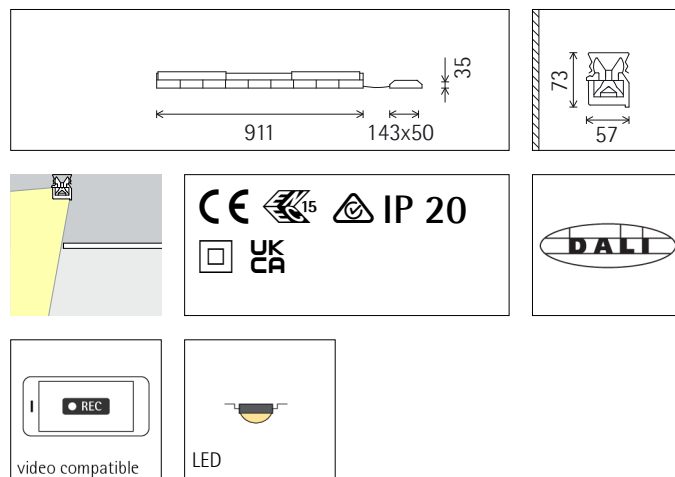


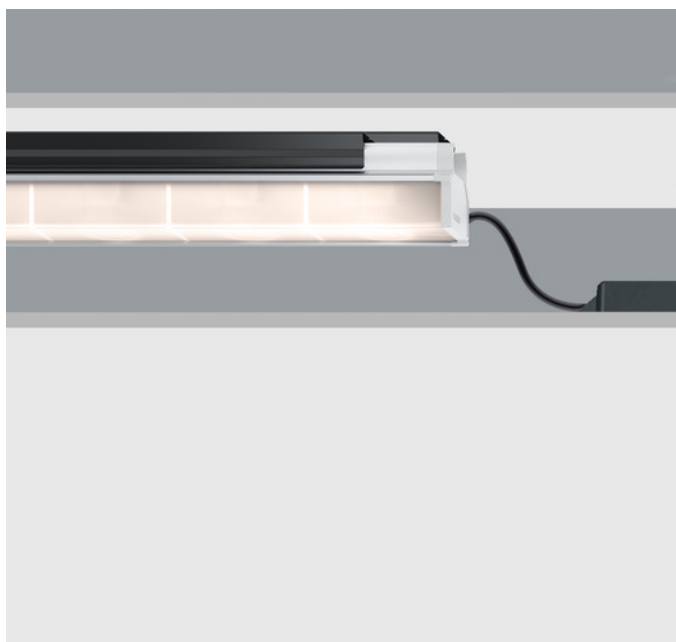


65242.000

LED module: 18.2W 2117lm 2700K
warm white
DALI-2
Version 4
Grazing light

Product description

Product description
Housing: aluminium profile, pivotable through $\pm 10^\circ$. Connection cable L 850mm.
End caps: polymer, white. Continuous row arrangement possible.
Fixing clamp: metal, powder-coated black.
4-pole terminal block.
Includes ERCO DALI control gear.
LED module: high-power LEDs.
Collimating lens made of optical polymer.
Spherulit lens, grazing.
Dimming possible via commercially available push-buttons (Push Dim).
Approved for use as emergency lighting according to IEC / EN 60598-2-22.
Safety class II
Weight 2.05kg
Through-wiring possible on request.



Technical data

Luminous flux of the luminaire	1730lm
Connected load	21.3W
Luminaire efficacy	81lm/W
Colour deviation	1.5 SDCM
Colour rendition index	CRI 92
Lumen maintenance	L90/B10 >50000h L90 >100000h
LED failure rate	0.1% >50000h
Dimming range	--
Dimming method	CCR
TLA (Temporal Light Artefacts)	$SVM \leq 0.1$; $PstLM \leq 1$
LMF	F
Standby power per control gear	--
Luminaires per circuit breaker B16	148

For your regional contact in the ERCO Sales network click here
www.erco.com/contact

Technical Region: 220-240V 50/60Hz
We reserve the right to make technical
and design changes.
Edition: 28.04.2026
Current version under
www.erco.com/65242.000

Planning data

Melanopic light effect

Art. no.	Spectrum	MR	MDER
65242.000 (direct)	2700K CRI 92	0.48	0.43

MR	Melanopic factor (of luminous radiation) a _{mel,v}
MDER	Melanopic Daylight Efficacy Ratio [gamma] _{mel,v,D65}

Multiplying the illuminance with the melanopic daylight efficacy ratio MDER gives the melanopic equivalent daylight illuminance MEDl. (MEDl = Melanopic Equivalent Daylight Illuminance [lx] E_{v, mel, D65} [lx]).

Extract from the Environmental Product Declaration (EPD)

The entire EPD can be found at: www.erco.com/65242.000

Extrapolation coefficients to convert the reference data from the EPD document for the declared unit

Lighting output	Manufacturing	Distribution	Installation	Use	End of Life	Benefits and loads
1512	1	1	1	1	1	1

Frequently used EPD data that have already been converted for this article number.

Parameter	Unit	A1-A3	A4	A5	B6	C1	C2	C3	C4	D	Total, excl. D
Results per functional unit											
GWP	kg CO2-eq.	6.05E00	1.88E-01	1.72E-01	1.54E02	0.00E00	6.72E-03	3.67E-01	5.31E-03	-2.00E00	1.61E02
GWP-biogenic	kg CO2-eq.	-1.62E-01	0.00E00	1.62E-01	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00
Results per declared unit											
GWP	kg CO2-eq.	1.96E01	6.10E-01	5.57E-01	4.99E02	0.00E00	2.18E-02	1.19E00	1.72E-02	-6.49E00	5.21E02
GWP-biogenic	kg CO2-eq.	-5.25E-01	0.00E00	5.25E-01	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00

A1-A3	Manufacturing
A4	Distribution
A5	Installation
B6	Use
C1-C4	End of Life
D	Benefits and loads

The data for operating the light (Use B6) refer to the European power source mix.
You will find the ERCO EPD Help under Downloads/General planning data.

Cleaning (a)	1	2	3
Ambient conditions	P	P	P
LMF	0.93	0.88	0.85

Hours of operation (h)	1000	5000	10000	20000	30000	40000	50000
LLMF	1.00	0.99	0.98	0.96	0.94	0.92	0.90
LSF	1	1	1	1	1	1	1

MF	LMFxRSMFxLLMFxLSF
MF	Maintenance Factor
LMF	Luminaire Maintenance Factor
RSMF	Room Surface Maintenance Factor
LLMF	Lamp Lumens Maintenance Factor
LSF	Lamp Survival Factor
P	Room pure
C	Room clean
N	Room normal
D	Room dirty

Data according to regulations

2019/2020/EU supplemented by 2021/341/EU and 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance

This product contains a light source of efficiency class E
Due to thermal and photometric properties as well as to protect electronic components from ESD (electrostatic discharge) the light source cannot be changed by the customer.

ID EPREL: 1708744
Model identifier: 3000068241
Download data sheets for control gear and disassembly instructions at www.erco.com/slr

Planning data

Technical data in accordance with international norms and standards

IEC 60598	Luminaires – Part 1+2: general requirements, specific requirements and tests
IEC 62031	LED modules for general lighting – safety requirements
IEC 62471	Photobiological safety of lamps and lamp systems
EN 13032-4	Light and lighting – measurement and representation of photometric data
CIE 13	Method of measuring and specifying colour rendering properties of light sources

All technical data is subject to industry-standard tolerances.

Also see www.erco.com/erco-led

For explanations of the symbols and abbreviations used and other general information, see www.erco.com/symbols