
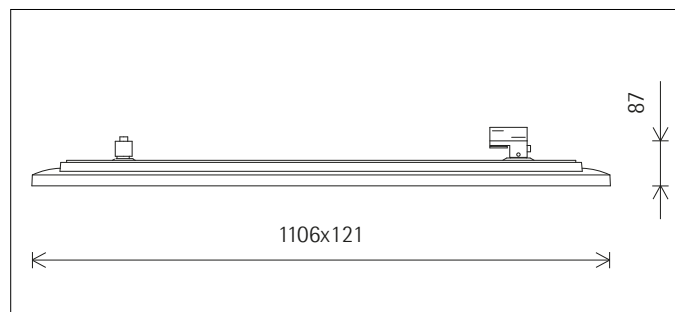
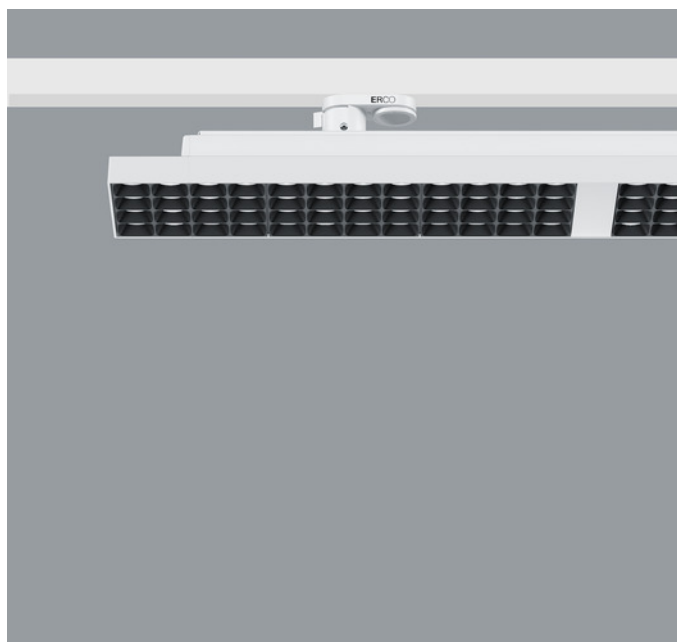


A3000209 White (RAL9002)
LED module: 34.7W 6480lm 2700K
warm white
Switchable
Version 2
Extra wide flood

Product description
Housing: aluminium profile/polymer,
powder-coated.
3-circuit adapter and mechanical
adapter for ERCO 220-240V track:
Polymer, white.
Control gear.
LED module: mid-power LEDs.
Lens system made of optical polymer.
Louvre: polymer, black lacquered.
Weight 4.10kg



Beam angle
C0 85°

UGR glare evaluation
C0 18

Technical data

Luminous flux of the luminaire	5592lm
Connected load	39.0W
Luminaire efficacy	143lm/W
Colour deviation	1.5 SDCM
Colour rendition index	CRI 92
Lumen maintenance	L90/B10 >50000h L80/B50 >100000h
LED failure rate	0.1% >50000h
Dimming range	--
Dimming method	--
TLA (Temporal Light Artefacts)	SVM ≤ 0.4; PstLM ≤ 1
LMF	E
Standby power per control gear	--
Luminaires per circuit breaker B16	16



Mounting
ERCO 3-circuit track
Hi-trac 3-circuit track

For your regional contact in the ERCO
Sales network click here
www.erco.com/contact

Technical Region: 220-240V 50/60Hz
We reserve the right to make technical
and design changes.
Edition: 28.04.2026
Current version under
www.erco.com/A3000209

Planning data

A3000209	LED module: 34.7W 6480lm 2700K warm white
Connected load	P: 39.0 W
Connected load per 100lx	P*: 0.8 W/m ²
Number of luminaires per 100lx	n*: 1.7 1/100m ²

A3000209	LED module: 34.7W 6480lm 2700K warm white			
Number of luminaires per 100m ² for	100lx	200lx	300lx	500lx
	2	4	6	9

A3000209	LED module: 34.7W 6480lm 2700K warm white			
Module (m)	1.2x1.8	1.8x1.8	1.8x2.4	2.4x2.4
Illuminance E _n (lx) for module (m)	-	1812	1359	1019

Melanopic light effect

Art. no.	Spectrum	MR	MDER
A3000209 (direct)	2700K CRI 92	0.49	0.45

MR	Melanopic factor (of luminous radiation) a _{mel,v}
MDER	Melanopic Daylight Efficacy Ratio [gamma] _{mel,v,D65}

Multiplying the illuminance with the melanopic daylight efficacy ratio MDER gives the melanopic equivalent daylight illuminance MEDl. (MEDl = Melanopic Equivalent Daylight Illuminance [lx] E_{v, mel, D65} [lx]).

Cleaning (a)	1				2				3			
Ambient conditions	P	C	N	D	P	C	N	D	P	C	N	D
LMF	0.96	0.94	0.90	0.86	0.93	0.91	0.86	0.81	0.92	0.90	0.84	0.79

Hours of operation (h)	1000	5000	10000	20000	30000	40000	50000
LLMF	1.00	0.99	0.98	0.96	0.94	0.92	0.90
LSF	1	1	1	1	1	1	1

MF	LMF x RSMF x LLMF x LSF
MF	Maintenance Factor
LMF	Luminaire Maintenance Factor
RSMF	Room Surface Maintenance Factor
LLMF	Lamp Lumens Maintenance Factor
LSF	Lamp Survival Factor
P	Room pure
C	Room clean
N	Room normal
D	Room dirty

Data according to regulations

2019/2020/EU supplemented by 2021/341/EU and 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance

This product contains a light source of efficiency class C
Due to thermal and photometric properties as well as to protect electronic components from ESD (electrostatic discharge) the light source cannot be changed by the customer.

ID EPREL: 1775095
Model identifier: 3000067710
Download data sheets for control gear and disassembly instructions at www.erco.com/slr

Planning data

Technical data in accordance with international norms and standards

IEC 60598	Luminaires – Part 1+2: general requirements, specific requirements and tests
IEC 62031	LED modules for general lighting – safety requirements
IEC 62471	Photobiological safety of lamps and lamp systems
EN 13032-4	Light and lighting – measurement and representation of photometric data
CIE 13	Method of measuring and specifying colour rendering properties of light sources

All technical data is subject to industry-standard tolerances.
Also see www.erco.com/erco-led

For explanations of the symbols and abbreviations used and other general information, see www.erco.com/symbols