
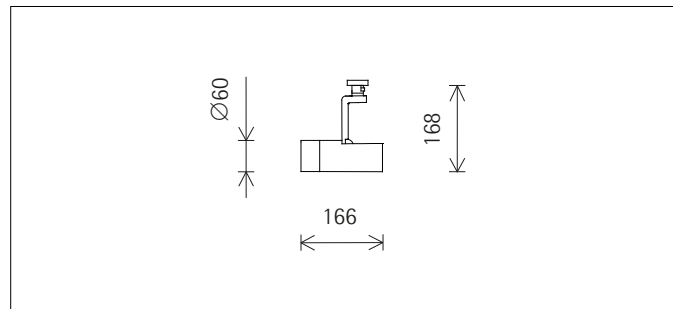
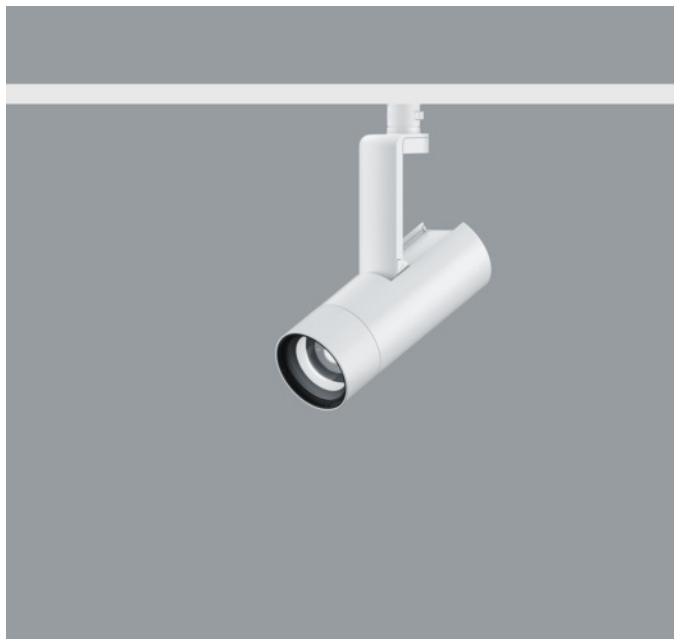


A8004023 White (RAL9002)
LED module: 12.4W 1520lm 3500K
neutral white
Casambi Bluetooth
Version 2
Construction size S
Darklight lens wide flood

Product description
Housing: cast aluminium, powder-coated; can be swivelled through 90° on the bracket. Upper cover made of polymer.
Bracket: cast aluminium/polymer, coated; can be rotated through 360° on the adapter.
Minirail adapter for ERCO Minirail 48V track: polymer, white.
ERCO control gear.
Add-on control unit: Casambi Bluetooth.
LED module: high-power LEDs.
Collimating lens made of optical polymer.
Lens unit: polymer, white. Darklight lens made of optical polymer. Optical cut-off 40°.
Control via Casambi app (Android/iOS) with Bluetooth Low Energy (BLE)-capable mobile devices or "Casambi Ready" products.
Safety class III
Weight 0.45kg



h(m)	E(lx)	D(m)
1.0	1430	0.96
2.0	358	1.91
3.0	159	2.87
4.0	89	3.82
5.0	57	4.78

Technical data

Luminous flux of the luminaire	982lm
Connected load	13.0W
Luminaire efficacy	76lm/W
Colour deviation	1.5 SDCM
Colour rendition index	CRI 92
Lumen maintenance	L90/B10 >50000h L90 >100000h
LED failure rate	0.1% >50000h
Dimming range	1%-100%
Dimming method	CCR
TLA (Temporal Light Artefacts)	SVM ≤ 0.1; PstLM ≤ 1
LMF	E
Standby power per control gear	0.2W
Luminaires per circuit breaker B16	--



DALI controllable via accessory
DALI Casambi Gateway for controlling Casambi Bluetooth via DALI.



Mounting
Minirail 48V track
Minirail 48V singlet



Planning data

Melanopic light effect

Art. no.	Spectrum	MR	MDER
A8004023 (direct)	3500K CRI 92	0.62	0.57

MR	Melanopic factor (of luminous radiation) $a_{mel,v}$
MDER	Melanopic Daylight Efficacy Ratio $[\gamma]_{mel,v,D65}$

Multiplying the illuminance with the melanopic daylight efficacy ratio MDER gives the melanopic equivalent daylight illuminance MEDl. (MEDl = Melanopic Equivalent Daylight Illuminance $[lx] E_{v, mel, D65} [lx]$).

Extract from the Environmental Product Declaration (EPD)

The entire EPD can be found at: www.ercos.com/A8004023

Extrapolation coefficients to convert the reference data from the EPD document for the declared unit

Lighting output	Manufacturing	Distribution	Installation	Use	EoL	Benefits and loads
895	1.008	1.004	1	1	1.007	1.008

Frequently used EPD data that have already been converted for this article number.

Parameter	Unit	A1-A3	A4	A5	B6	C1	C2	C3	C4	D	Total, excl. D
Results per functional unit											
GWP	kg CO2-eq.	1.06E01	1.38E-01	4.46E-01	1.73E02	0.00E00	2.82E-03	2.14E-01	2.38E-03	-1.16E-01	1.84E02
GWP-biogenic	kg CO2-eq.	-4.35E-01	0.00E00	4.32E-01	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00	-3.00E-03
Results per declared unit											
GWP	kg CO2-eq.	1.81E01	2.36E-01	7.60E-01	2.95E02	0.00E00	4.82E-03	3.65E-01	4.07E-03	-1.98E-01	3.14E02
GWP-biogenic	kg CO2-eq.	-7.43E-01	0.00E00	7.37E-01	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00	-6.00E-03

A1-A3	Manufacturing
A4	Distribution
A5	Installation
B6	Use
C1-C4	End of Life
D	Benefits and loads

The data for operating the light (Use B6) refer to the European power source mix.
You will find the ERCO EPD Help under Downloads/General planning data.

Cleaning (a)	1				2				3			
Ambient conditions	P	C	N	D	P	C	N	D	P	C	N	D
LMF	0.96	0.94	0.90	0.86	0.93	0.91	0.86	0.81	0.92	0.90	0.84	0.79

Hours of operation (h)	1000	5000	10000	20000	30000	40000	50000
LLMF	1.00	0.99	0.98	0.96	0.94	0.92	0.90
LSF	1	1	1	1	1	1	1

MF	LMFxRSMFxLLMFxLSF
MF	Maintenance Factor
LMF	Luminaire Maintenance Factor
RSMF	Room Surface Maintenance Factor
LLMF	Lamp Lumens Maintenance Factor
LSF	Lamp Survival Factor
P	Room pure
C	Room clean
N	Room normal
D	Room dirty

Data according to regulations

2019/2020/EU supplemented by 2021/341/EU and 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance

This product contains a light source of efficiency class D
Due to thermal and photometric properties as well as to protect electronic components from ESD (electrostatic discharge) the light source cannot be changed by the customer.

ID EPREL: 1708842

Model identifier: 3000068486

Download data sheets for control gear and disassembly instructions at www.ercos.com/slr

Planning data

Technical data in accordance with international norms and standards


IEC 60598	Luminaires – Part 1+2: general requirements, specific requirements and tests
IEC 62031	LED modules for general lighting – safety requirements
IEC 62471	Photobiological safety of lamps and lamp systems
EN 13032-4	Light and lighting – measurement and representation of photometric data
CIE 13	Method of measuring and specifying colour rendering properties of light sources

All technical data is subject to industry-standard tolerances.


Also see www.erco.com/erco-led

For explanations of the symbols and abbreviations used and other general information, see www.erco.com/symbols

Accessories



AC002006
 Lens unit spot
 Polymer, black lacquered, rotatable through 360°. Replacement without tools.
 Darklight lens made of optical polymer.
 Optical cut-off 50°. Weight 0.04kg
CE



AC002003
 Lens unit extra wide flood
 Polymer, black lacquered, rotatable through 360°. Replacement without tools.
 Darklight lens made of optical polymer.
 Weight 0.04kg
CE



AC002038
 Lens unit spot
 Polymer, white, rotatable through 360°. Replacement without tools.
 Darklight lens made of optical polymer.
 Optical cut-off 50°. Weight 0.04kg
CE



AC002035
 Lens unit extra wide flood
 Polymer, white, rotatable through 360°. Replacement without tools.
 Darklight lens made of optical polymer.
 Weight 0.04kg
CE




AC002004
 Lens unit flood
 Polymer, black lacquered, rotatable through 360°. Replacement without tools.
 Darklight lens made of optical polymer.
 Optical cut-off 40°. Weight 0.04kg
CE



AC002032
 Lens unit oval flood
 Polymer, white, rotatable through 360°. Replacement without tools.
 Anti-reflective Spherolit lens made of optical polymer.
 Weight 0.04kg
CE




AC002036
 Lens unit flood
 Polymer, white, rotatable through 360°. Replacement without tools.
 Darklight lens made of optical polymer.
 Optical cut-off 40°. Weight 0.04kg
CE



AC002058
 Lens unit oval flood
 Polymer, black lacquered, rotatable through 360°. Replacement without tools.
 Anti-reflective Spherolit lens made of optical polymer.
 Weight 0.04kg
CE




AC002002
 Lens unit wide flood
 Polymer, black lacquered, rotatable through 360°. Replacement without tools.
 Darklight lens made of optical polymer.
 Optical cut-off 40°. Weight 0.04kg
CE



AC002005
 Lens unit wallwash
 Polymer, black lacquered, rotatable through 360°. Replacement without tools.
 Anti-reflective Spherolit lens made of optical polymer.
 Weight 0.04kg
CE




AC002033
 Lens unit wide flood
 Polymer, white, rotatable through 360°. Replacement without tools.
 Darklight lens made of optical polymer.
 Optical cut-off 40°. Weight 0.04kg
CE




AC002037
 Lens unit wallwash
 Polymer, white, rotatable through 360°. Replacement without tools.
 Anti-reflective Spherolit lens made of optical polymer.
 Weight 0.04kg
CE

Accessories




AC002122
 Lens unit zoom spot
 Polymer, black lacquered, rotatable through 360°. Replacement without tools.
 Anti-reflective zoom lens made of optical polymer, infinitely variable focus.
 Weight 0.04kg
CE



AC006002
 Softening lens
 Filter holder: polymer, black, rotatable through 360°. Replacement without tools.
 Weight 0.03kg



AC002127
 Lens unit zoom spot
 Polymer, white, rotatable through 360°. Replacement without tools.
 Anti-reflective zoom lens made of optical polymer, infinitely variable focus.
 Weight 0.04kg
CE



AC006025
 Sculpture lens
 Filter holder: polymer, black, rotatable through 360°. Replacement without tools.
 Weight 0.03kg




AC002232
 Lens unit narrow framing
 Aluminium/polymer, coated black, pivotable through 360°. Replacement without tools.
 Projection lens, continuously focusable. Ideal for long projection distances.
 Framing attachment: stainless steel, black.
 Aperture.
 Weight 0.16kg
CE



AC006009
 Cold Filter
 Filter holder: polymer, black, rotatable through 360°. Replacement without tools.
 Weight 0.03kg




AC002239
 Lens unit narrow framing
 Aluminium/polymer, coated white, pivotable through 360°. Replacement without tools.
 Projection lens, continuously focusable. Ideal for long projection distances.
 Framing attachment: stainless steel, black.
 Aperture.
 Weight 0.16kg
CE



AC006007
 Cold Filter Plus
 Filter holder: polymer, black, rotatable through 360°. Replacement without tools.
 Weight 0.03kg




AC002124
 Lens unit wide framing
 Aluminium/polymer, coated black, pivotable through 360°. Replacement without tools.
 2 projection lenses, continuously focusable. Ideal for short projection distances.
 Framing attachment: stainless steel, black.
 Aperture.
 Weight 0.16kg
CE



AC006005
 Warm Filter
 Filter holder: polymer, black, rotatable through 360°. Replacement without tools.
 Weight 0.03kg




AC002129
 Lens unit wide framing
 Aluminium/polymer, coated white, pivotable through 360°. Replacement without tools.
 2 projection lenses, continuously focusable. Ideal for short projection distances.
 Framing attachment: stainless steel, black.
 Aperture.
 Weight 0.16kg
CE



AC006003
 Warm Filter Plus
 Filter holder: polymer, black, rotatable through 360°. Replacement without tools.
 Weight 0.03kg


Accessories

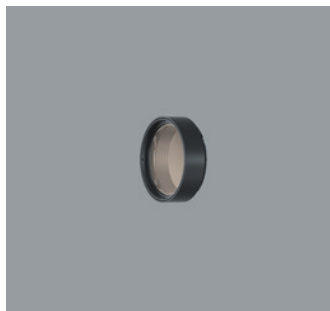

AC006006
Skintone Filter
Filter holder: polymer, black, rotatable through 360°. Replacement without tools.
Weight 0.03kg




AC001010
Snoot
Polymer, black.

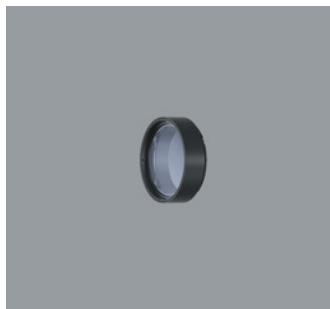


AC006013
Fish Filter
Filter holder: polymer, black, rotatable through 360°. Replacement without tools.
Weight 0.03kg




AC004024
Honeycomb anti-glare screen
Black
Weight 0.02kg

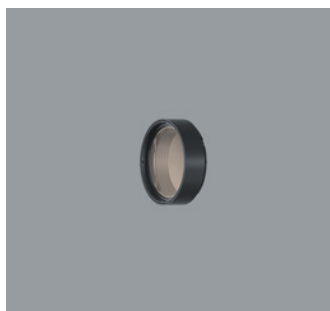


AC006010
Marbled Meat Filter
Filter holder: polymer, black, rotatable through 360°. Replacement without tools.
Weight 0.03kg




AC005002
Barn doors 4-fold
Aluminium, coated black.
Weight 0.07kg

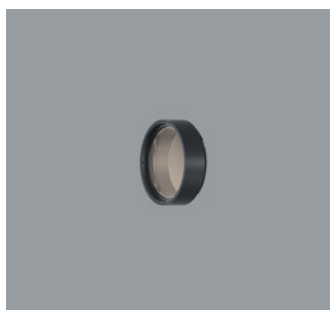

AC006008
Bread and Pastry Filter
Filter holder: polymer, black, rotatable through 360°. Replacement without tools.
Weight 0.03kg



AC005004
Barn doors 8-fold
Aluminium, coated black.
Weight 0.08kg

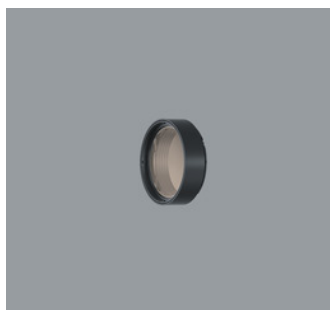

AC006004
Blue Light Filter
Filter holder: polymer, black, rotatable through 360°. Replacement without tools.
Weight 0.03kg



AC003002
Add-on Control Unit On-board Dim
Polymer, black. Replacement without tools.
Rotary control for brightness regulation.
CE




AC001002
Snoot
Polymer, black, coated white on outside.



AC003006
Add-on Control Unit On-board Dim
Polymer, white. Replacement without tools.
Rotary control for brightness regulation.
CE


Accessories



AC003001

Add-on Control Unit Casambi Bluetooth
Polymer, black. Replacement without tools.
Control via Casambi app (Android/iOS) with Bluetooth Low Energy (BLE)-capable mobile devices or "Casambi Ready" products.


CE



AC003005

Add-on Control Unit Casambi Bluetooth
Polymer, white. Replacement without tools.
Control via Casambi app (Android/iOS) with Bluetooth Low Energy (BLE)-capable mobile devices or "Casambi Ready" products.

CE




AC007001

DALI Casambi Gateway
Enables DALI systems to be connected to luminaires, sensors and control units with Casambi Bluetooth. The gateway can only be operated in Evolution networks. Power is supplied exclusively via the DALI bus. Connection via two lines which must be designed for mains voltage. The gateway requires no DALI addresses, the devices appear as non-configured devices in the DALI system. Addressing/commissioning is performed via the DALI control. It can individually control 64 devices, and via the broadcast command up to 249 devices.

This article is identical with article 55251.


CE



56012.000

ERCO Casambi motion detector with light sensor
Black (RAL9011).
Setup via Casambi app (Android/iOS) with Bluetooth Low Energy (BLE)-capable mobile devices.
Use for daylight-dependent light control with or without motion detector.
Detection range of infrared (PIR) sensor 100°/ 5m. At 3m room height, this is a circle with diameter of approx. 7m.
Minirail adapter for ERCO Minirail 48V track: polymer, black.
Weight 0.05kg

CE IP 20



56011.000

ERCO Casambi motion detector with light sensor
White (RAL9002).
Setup via Casambi app (Android/iOS) with Bluetooth Low Energy (BLE)-capable mobile devices.
Use for daylight-dependent light control with or without motion detector.
Detection range of infrared (PIR) sensor 100°/ 5m. At 3m room height, this is a circle with diameter of approx. 7m.
Minirail adapter for ERCO Minirail 48V track: polymer, white.
Weight 0.05kg

CE IP 20

