
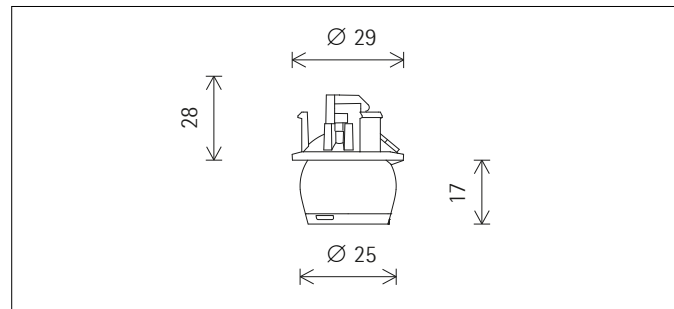
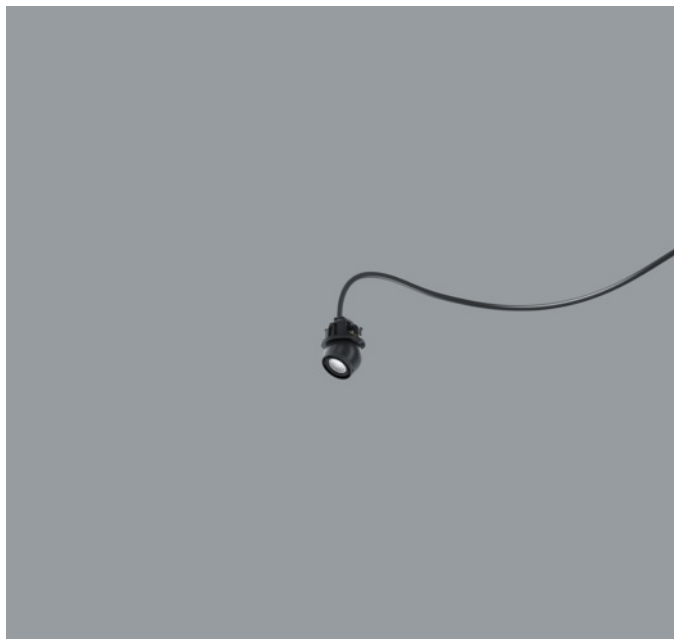


B3000084 Black (RAL9005)
LED module: 1.9W 254lm 3500K neutral white
Version 2
Construction size XXS
Spherolit lens, wide flood


Product description
For tool-free mounting in mounting frame (accessory).
Light head: polymer/metal, coated black (RAL9005), matt. Can be rotated 360° and pivoted 0-70°.
Connection cable, black, 2x 0.35mm², L 1.0m.
LED module: high-power LEDs.
Lens unit: polymer, black. Collimating lens made of optical polymer.
Replacement without tools.
Spherolit lens made of optical polymer.
Install the luminaire out of people's normal reach.
ERCO Axis control gear and mounting frame required (order separately).
Safety class III
Housing temperature 75 °C
Weight 0.04kg



h(m)	E(lx)	D(m)
		46.9°
1.0	283	0.87
2.0	71	1.74
3.0	31	2.60
4.0	18	3.47
5.0	11	4.34

Technical data

Luminous flux of the luminaire	193lm
Connected load	1.9W
Luminaire efficacy	101lm/W
Colour deviation	1.5 SDCM
Colour rendition index	CRI 92
Lumen maintenance	L90/B10 >50000h L90 >100000h
LED failure rate	0.1% >50000h
Dimming range	--
Dimming method	--
TLA (Temporal Light Artefacts)	--
LMF	E
Standby power per control gear	--
Luminaires per circuit breaker B16	--



Mounting
Axis mounting frame

Planning data

Melanopic light effect

Art. no.	Spectrum	MR	MDER
B3000084 (direct)	3500K CRI 92	0.62	0.57

MR	Melanopic factor (of luminous radiation) $a_{mel,v}$
MDER	Melanopic Daylight Efficacy Ratio $[\gamma]_{mel,v,D65}$

Multiplying the illuminance with the melanopic daylight efficacy ratio MDER gives the melanopic equivalent daylight illuminance MEDl. (MEDl = Melanopic Equivalent Daylight Illuminance $[lx]$ $E_{v, mel, D65} [lx]$).

Extract from the Environmental Product Declaration (EPD)

The entire EPD can be found at: www.erco.com/B3000084

Extrapolation coefficients to convert the reference data from the EPD document for the declared unit

Lighting output	Manufacturing	Distribution	Installation	Use	EoL	Benefits and loads
102	1	0.897432515	1.036993728	1	0.729095236	1

Frequently used EPD data that have already been converted for this article number.

Parameter	Unit	A1-A3	A4	A5	B6	C1	C2	C3	C4	D	Total
Results per functional unit											
GWP	kg CO2 eq	1.52E01	1.89E-01	6.05E-01	1.09E02	0.00E00	2.93E-03	3.80E-01	2.08E-03	-5.39E-01	1.25E02
GWP-biogenic	kg CO2 eq	-5.21E-01	0.00E00	5.40E-01	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00	1.90E-02
Results per declared unit											
GWP	kg CO2 eq	3.33E00	4.14E-02	1.32E-01	2.38E01	0.00E00	6.40E-04	8.30E-02	4.56E-04	-1.18E-01	2.74E01
GWP-biogenic	kg CO2 eq	-1.14E-01	0.00E00	1.18E-01	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00	4.00E-03

A1-A3	Manufacturing
A4	Distribution
A5	Installation
B6	Use
C1-C4	End of Life
D	Benefits and loads

The data for operating the light (Use B6) refer to the European power source mix.
You will find the ERCO EPD Help under Downloads/General planning data.

Cleaning (a)	1				2				3			
Ambient conditions	P	C	N	D	P	C	N	D	P	C	N	D
LMF	0.96	0.94	0.90	0.86	0.93	0.91	0.86	0.81	0.92	0.90	0.84	0.79

Hours of operation (h)	1000	5000	10000	20000	30000	40000	50000
LLMF	1.00	0.99	0.98	0.96	0.94	0.92	0.90
LSF	1	1	1	1	1	1	1

MF	LMFxRSMFxFLLMFxLSF
MF	Maintenance Factor
LMF	Luminaire Maintenance Factor
RSMF	Room Surface Maintenance Factor
LMLF	Lamp Lumens Maintenance Factor
LSF	Lamp Survival Factor
P	Room pure
C	Room clean
N	Room normal
D	Room dirty

Data according to regulations

2019/2020/EU supplemented by 2021/341/EU and 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance

This product contains a light source of efficiency class D
Due to thermal and photometric properties as well as to protect electronic components from ESD (electrostatic discharge) the light source cannot be changed by the customer.

ID EPREL: 2504726

Model identifier: 3000069926

Download data sheets for control gear and disassembly instructions at www.erco.com/slr

Planning data

Technical data in accordance with international norms and standards

IEC 60598	Luminaires – Part 1+2: general requirements, specific requirements and tests
IEC 62031	LED modules for general lighting – safety requirements
IEC 62471	Photobiological safety of lamps and lamp systems
EN 13032-4	Light and lighting – measurement and representation of photometric data
CIE 13	Method of measuring and specifying colour rendering properties of light sources

All technical data is subject to industry-standard tolerances.

Also see www.erco.com/erco-led


For explanations of the symbols and abbreviations used and other general information, see www.erco.com/symbols

Accessories




AC012009

Control gear, DALI (35.K1.D1)
Exclusively for use with a total of 3-7 Axis recessed spotlights.
Housing: polymer, black.
Input voltage: 220-240V AC, 50/60Hz.
Connected load 15.5W.
Primary side connection 4x 0.2-1.5mm²; cable entry with strain relief for ø 8-11.6mm.
Secondary side connection 2x 0.2-1.5mm²; cable entry with strain relief for ø 3.8-6.8mm.
Maximum cable length between control gear and distributor: do not exceed 2.0 m (with 7 light heads) or 25.0 m (with 3-6 light heads). The luminaires must be connected in series.
ERCO DALI control gear.
Use only with Axis recessed spotlights from version V02 onwards, with a power rating of at least 1.8W.
The control gear must not be covered with insulating materials.
Ambient temperature 25°C.
Control gear units per circuit breaker B16: up to 204.
Simultaneous dimming of all connected luminaires via DALI.
Weight 0.14kg
CE **IP 20**




AC012011

Control gear, Casambi Bluetooth (35.K1.B1)
Exclusively for use with a total of 1-2 Axis recessed spotlights.
Housing: polymer, black.
Input voltage: 220-240V AC, 50/60Hz.
Connected load 5.5W.
Primary side connection 2x 0.2-1.5mm²; cable entry with strain relief for ø 8-11.6mm.
Secondary side connection 2x 0.2-1.5mm²; cable entry with strain relief for ø 3.8-6.8mm.
Maximum cable length between control gear and distributor must not exceed 7.0m. The lights must be connected in series.
ERCO Casambi control gear.
Use only with Axis recessed spotlights from version V02 onwards, with a power rating of at least 1.8W.
The control gear must not be covered with insulating materials.
Ambient temperature 25°C.
Control gear units per circuit breaker B16: up to 576.
Simultaneous dimming of all connected luminaires via Casambi Bluetooth.
Control via Casambi app (Android/iOS) with Bluetooth Low Energy (BLE)-capable mobile devices or "Casambi Ready" products.
Weight 0.14kg
CE **IP 20**




AC012010

Control gear, DALI (35.K1.D1)
Exclusively for use with a total of 1-2 Axis recessed spotlights.
Housing: polymer, black.
Input voltage: 220-240V AC, 50/60Hz.
Connected load 5.5W.
Primary side connection 4x 0.2-1.5mm²; cable entry with strain relief for ø 8-11.6mm.
Secondary side connection 2x 0.2-1.5mm²; cable entry with strain relief for ø 3.8-6.8mm.
Maximum cable length between control gear and distributor must not exceed 7.0m. The lights must be connected in series.
ERCO DALI control gear.
Use only with Axis recessed spotlights from version V02 onwards, with a power rating of at least 1.8W.
The control gear must not be covered with insulating materials.
Ambient temperature 25°C.
Control gear units per circuit breaker B16: up to 576.
Simultaneous dimming of all connected luminaires via DALI.
Weight 0.14kg
CE **IP 20**




AC012012



Control gear, Casambi Bluetooth (35.K1.B1)
Exclusively for use with a total of 3-7 Axis recessed spotlights.
Housing: polymer, black.
Input voltage: 220-240V AC, 50/60Hz.
Connected load 15.5W.
Primary side connection 2x 0.2-1.5mm²; cable entry with strain relief for ø 8-11.6mm.
Secondary side connection 2x 0.2-1.5mm²; cable entry with strain relief for ø 3.8-6.8mm.
Maximum cable length between control gear and distributor: do not exceed 2.0m (with 7 light heads) or 25.0m (with 3-6 light heads). The luminaires must be connected in series.
ERCO Casambi control gear.
Use only with Axis recessed spotlights from version V02 onwards, with a power rating of at least 1.8W.
The control gear must not be covered with insulating materials.
Ambient temperature 25°C.
Control gear units per circuit breaker B16: up to 204.
Simultaneous dimming of all connected luminaires via Casambi Bluetooth.
Control via Casambi app (Android/iOS) with Bluetooth Low Energy (BLE)-capable mobile devices or "Casambi Ready" products.
Weight 0.14kg
CE **IP 20**





Accessories

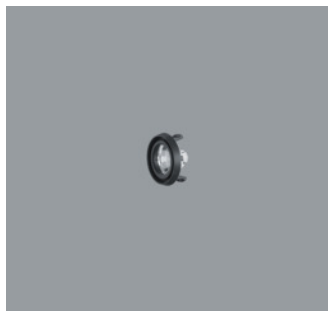



AC002267
 Lens unit spot
 Polymer, black. Collimating lens made of optical polymer. Replacement without tools.
 Beam angle approx. 15°.
CE

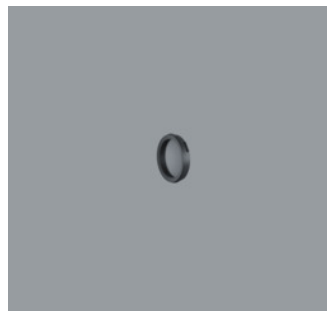



AC006068
 Softening lens
 Filter holder: polymer, black, rotatable through 360°. Replacement without tools.

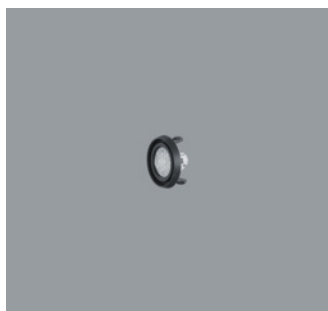



AC002268
 Lens unit flood
 Polymer, black. Collimating lens made of optical polymer. Replacement without tools.
 Spherolit lens made of optical polymer.
 Beam angle approx. 30°.
CE

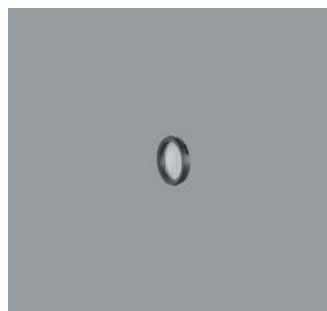


AC006073
 Sculpture lens
 Creates oval distribution with a side ratio of approx. 3:1. Rotatable through 360°.
 Filter holder: polymer, black.
 Replacement without tools.

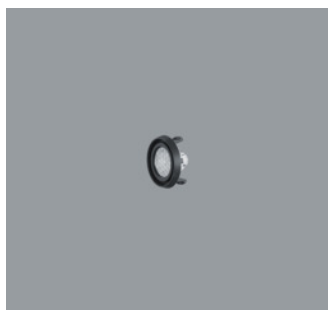


AC002269
 Lens unit wide flood
 Polymer, black. Collimating lens made of optical polymer. Replacement without tools.
 Spherolit lens made of optical polymer.
 Beam angle approx. 45°.
CE

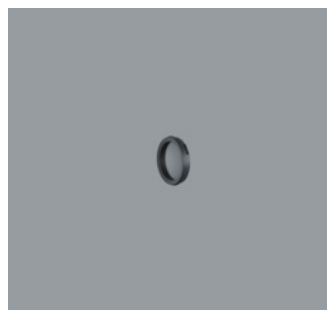


AC006069
 Blue Light Filter
 to reduce the blue light component (<440nm).
 Filter holder: polymer, black.
 Replacement without tools.





Accessories




AC001025
Snoot
For glare control.
Polymer, black. Tool-free replacement.
With attachment option for filter foils.



AC013001
Distributor
Housing: polymer, black.
1 input, 1 output; connection possibility for a maximum of 9 Axis light heads or a maximum of 8 Axis light heads and one additional distributor.
Connectable cable cross-section 2x 0.2-1.5mm² (2x AWG 24 - AWG 16 USA/Canada).
The distributor may only be connected on the secondary side of the Axis control gear. Never connect mains voltage!
Safety class III (international).
Class 2 (USA/Canada).
Weight 0.10kg




AC004028
Honeycomb anti-glare screen
For glare control.
Polymer, black. Tool-free replacement.
With soft focus lens and attachment option for filter foils.





AC013002
Cable
Black. 2x 0.35mm²; L10.0m.
Only suitable for connecting Axis luminaires, Axis distributors and the secondary side of the Axis control gear.
The cable is not approved for mains voltage.
Weight 0.24kg



AC014002
Mounting frame, 4-fold
Polymer, black.
Fixing springs for ceiling thicknesses of 1-25mm.
Weight 0.03kg



AC007001
DALI Casambi Gateway
Enables DALI systems to be connected to luminaires, sensors and control units with Casambi Bluetooth. The gateway can only be operated in Evolution networks. Power is supplied exclusively via the DALI bus. Connection via two lines which must be designed for mains voltage. The gateway requires no DALI addresses, the devices appear as non-configured devices in the DALI system. Addressing/commissioning is performed via the DALI control. It can individually control 64 devices, and via the broadcast command up to 249 devices.
This article is identical with article 55251.



CE
AC012011
AC012012

Accessories


**AC014003**

Mounting frame, 2-fold

Polymer, black.

Fixing springs for ceiling thicknesses of 1-25mm.

Weight 0.02kg

**AC014004**

Mounting frame

Polymer, black.

Fixing springs for ceiling thicknesses of 1-25mm.

