Homework 5

EE 999 — Introduction to Control Systems

Patrick Gordon • October 11, 2026

Due Wednesday, October 14, 2026

Problem 1.A — Transfer function

$$U(s) = k_p R(s) \tag{1}$$
$$Y(s) = \frac{b_1}{s + a_1} U(s) \tag{2}$$
$$Y(s) = \frac{k_p b_1}{s + a_1} R(s) \tag{3}$$

$$G_{ry1}(s) = \frac{Y(s)}{R(s)} = \frac{k_p b_1}{s + a_1} \tag{4}$$

Problem 1.B — Transfer function

$$Y(s) = \frac{b_1}{s + a_1} U(s) \tag{5}$$
$$U(s) = \frac{k_p s + k_i}{s} R(s) \tag{6}$$
$$Y(s) = \frac{b_1(k_p s + k_i)}{s^2 + a_1 s} R(s) \tag{7}$$

$$G_{ry2}(s) = \frac{Y(s)}{R(s)} = \frac{b_1(k_p s + k_i)}{s^2 + a_1 s} \tag{8}$$

Problem 1.C.1 — Transfer function

$$Y(s) = \frac{b_1}{s + a_1} U(s) \tag{9}$$
$$U(s) = \frac{k_p s + k_i}{s} E(s) \tag{10}$$
$$E(s) = R(s) - Y(s) \tag{11}$$
$$Y(s) = \frac{b_1(k_p s + k_i)}{s^2 + a_1 s} E(s) \tag{12}$$

$$Y(s) = \frac{b_1(k_p s + k_i)}{s^2 + a_1 s} (R(s) - Y(s)) \tag{13}$$
$$\left(1 + \frac{b_1(k_p s + k_i)}{s^2 + a_1 s}\right) Y(s) = \frac{b_1(k_p s + k_i)}{s^2 + a_1 s} R(s) \tag{14}$$
$$\frac{s^2 + (a_1 + b_1 k_p)s + b_1 k_i}{s^2 + a_1 s} Y(s) = \frac{b_1(k_p s + k_i)}{s^2 + a_1 s} R(s) \tag{15}$$
$$Y(s) = \frac{b_1 k_p s + b_1 k_i}{s^2 + (a_1 + b_1 k_p)s + b_1 k_i} R(s) \tag{16}$$

$$T_{ry3}(s) = \frac{Y(s)}{R(s)} = \frac{b_1 k_p s + b_1 k_i}{s^2 + (a_1 + b_1 k_p)s + b_1 k_i} \tag{17}$$

Problem 1.C.2 — Assign Values

$b_1 = 3,\ a_1 = 2,\ k_p = 1,\ k_i = 5$

$$T_{ry3}(s) = \frac{(3)(1)s + (3)(5)}{s^2 + ((2) + (3)(1))s + (3)(5)} \tag{18}$$

$$T_{ry3}(s) = \frac{3s + 15}{s^2 + 5s + 15} \tag{19}$$

Problem 1.C.4 — Step response

Code: `hw_05_1_C_4.m`

```
if exist('OCTAVE_VERSION', 'builtin')
    pkg load control;
end

b_1 = 3;
a_1 = 2;
k_p = 1;
k_i = 5;

num = [b_1*k_p, b_1*k_i];
den = [1, (a_1 + b_1*k_p), b_1 * k_i];

T_ry = tf(num, den);

T_ry_poles = pole(T_ry)
T_ry_zeros = zero(T_ry)

figure;
step(T_ry);
grid on;
title("Step response of T_{Ry3}(s)");

[yy, tt] = step(T_ry);

T_ry_overshoot = max(yy) - 1
```

Output: `output/hw_05_1_C_4.txt`

```
T_ry_poles =

  -2.5000 + 2.9580i
  -2.5000 - 2.9580i

T_ry_zeros = -5
T_ry_overshoot = 0.1134
```

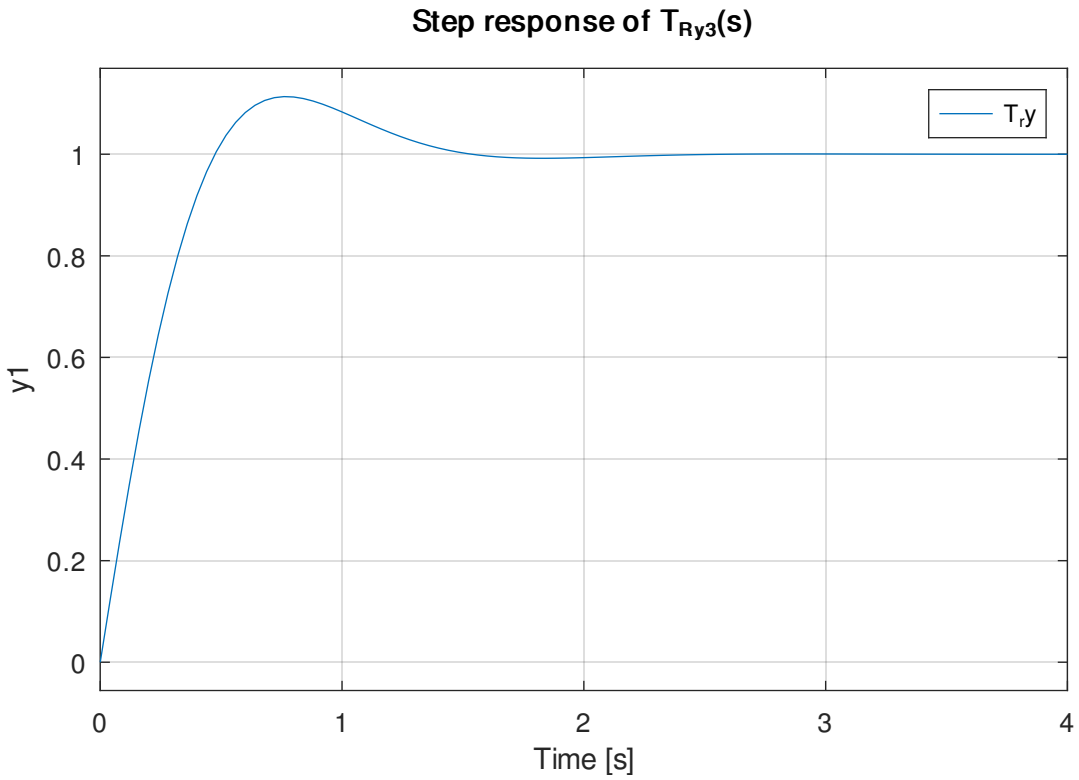


Figure 1: Step response of $T_{ry3}(s)$ with $k_p = 1$, $k_i = 5$.

Problem 1.C.5 — Overshoot

from above code, overshoot is %11.34

Problem 1.C.6 — Adjusted k_p

Code: hw_05_1_C_6.m

```
if exist('OCTAVE_VERSION', 'builtin')
    pkg load control;
end

b_1 = 3;
a_1 = 2;
k_p = 1.6;
k_i = 5;

num = [b_1*k_p, b_1*k_i];
den = [1, (a_1 + b_1*k_p), b_1 * k_i];

T_ry = tf(num, den);

T_ry_poles = pole(T_ry)
T_ry_zeros = zero(T_ry)

figure;
step(T_ry);
grid on;
title("Step response of T_{Ry3}(s)");

[yy, tt] = step(T_ry);

T_ry_overshoot = max(yy) - 1
```

Output: output/hw_05_1_C_6.txt

```
T_ry_poles =

  -3.4000 + 1.8547i
  -3.4000 - 1.8547i

T_ry_zeros = -3.1250
T_ry_overshoot = 0.044085
```

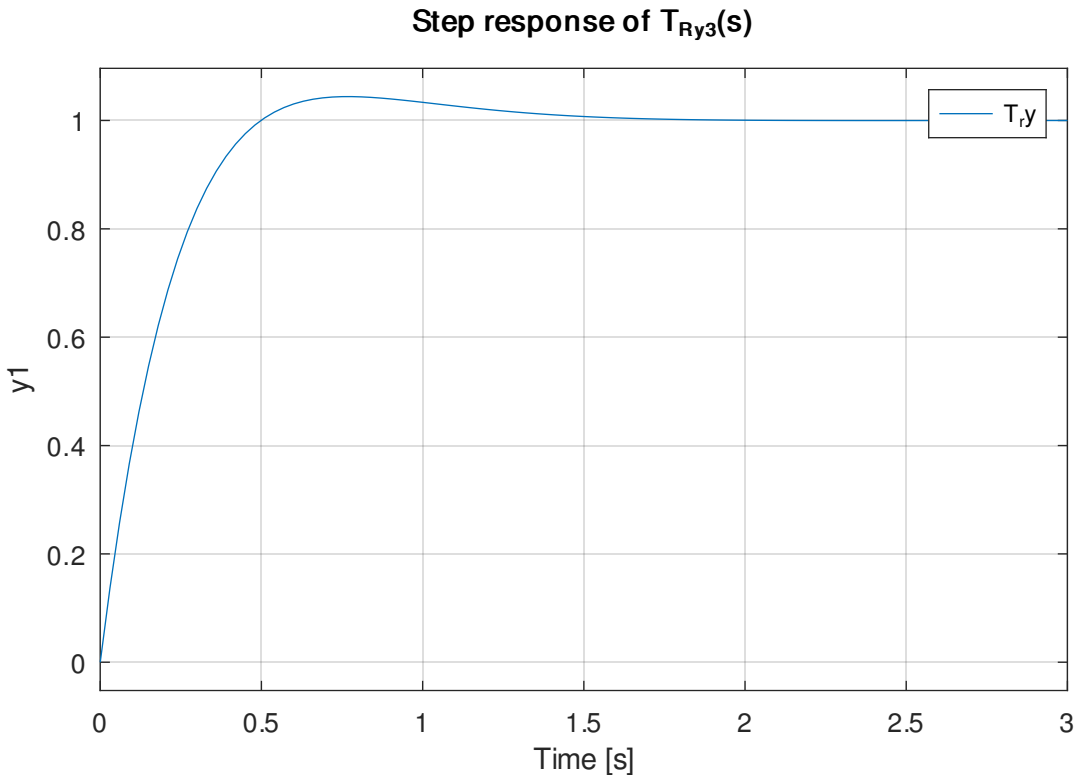


Figure 2: Step response of $T_{ry3}(s)$ with $k_p = 1.6$, $k_i = 5$.

Yes the overshoot is less than 5% at 4.41%.

Problem 2 — Pole and zero locations

Code: `hw_05_2.m`

```
if exist('OCTAVE_VERSION', 'builtin')
    pkg load control;
end

num_1 = [1 2];
den_1 = [1 10 8];
G_1 = tf(num_1, den_1);
G_1_poles = pole(G_1)
G_1_zeros = zero(G_1)
disp("-------------------");

num_2 = [5 15];
den_2 = [1 2 10];
G_2 = tf(num_2, den_2);
G_2_poles = pole(G_2)
G_2_zeros = zero(G_2)
disp("-------------------");

num_3 = [1 3];
den_3 = [1 -4 8];
G_3 = tf(num_3, den_3);
G_3_poles = pole(G_3)
G_3_zeros = zero(G_3)
disp("-------------------");

num_4 = [5 15];
den_4 = [1 2 6 10];
G_4 = tf(num_4, den_4);
G_4_poles = pole(G_4)
G_4_zeros = zero(G_4)
disp("-------------------");

num_5 = [2 9];
den_5 = [1 2 6 30];
G_5 = tf(num_5, den_5);
G_5_poles = pole(G_5)
G_5_zeros = zero(G_5)
disp("-------------------");
```

Output: `output/hw_05_2.txt`

```
G_1_poles =

  -9.1231
  -0.8769

G_1_zeros = -2
-------------------
G_2_poles =

  -1 + 3i
  -1 - 3i

G_2_zeros = -3
-------------------
G_3_poles =

   2 + 2i
   2 - 2i

G_3_zeros = -3
-------------------
G_4_poles =

  -0.1090 + 2.3664i
  -0.1090 - 2.3664i
  -1.7820 +      0i

G_4_zeros = -3
-------------------
G_5_poles =

  -3.1365 +      0i
   0.5683 + 3.0400i
   0.5683 - 3.0400i

G_5_zeros = -4.5000
-------------------
```

Problem 2.B — Pole-zero sketches

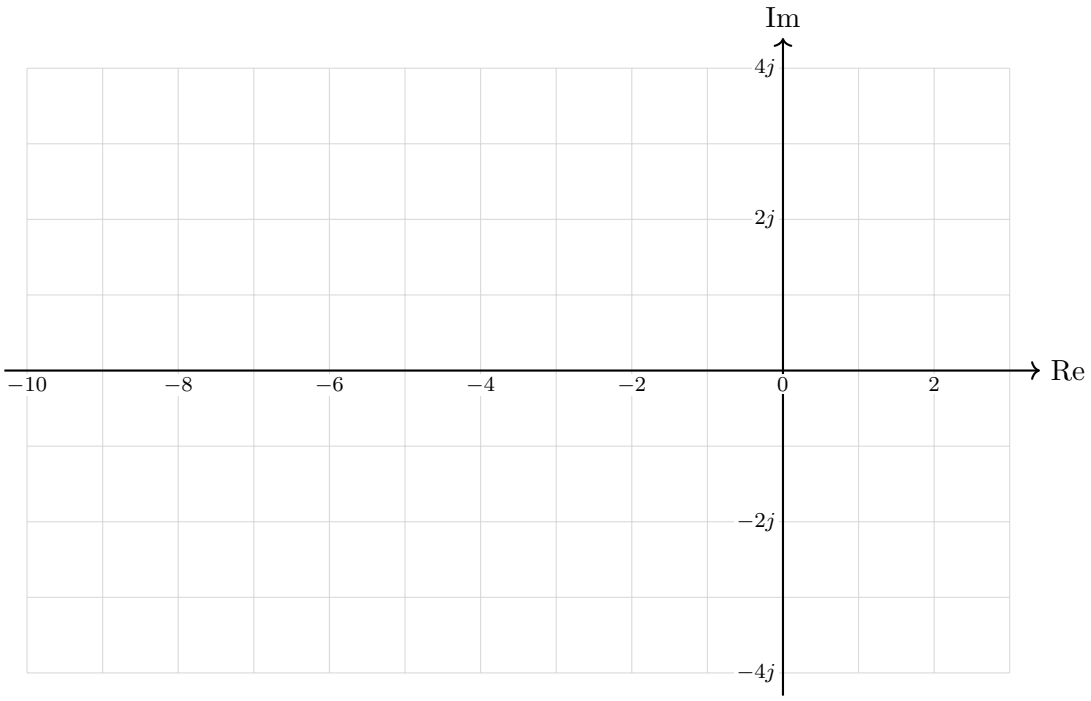


Figure 3: Pole-zero sketch of $G_1(s)$.

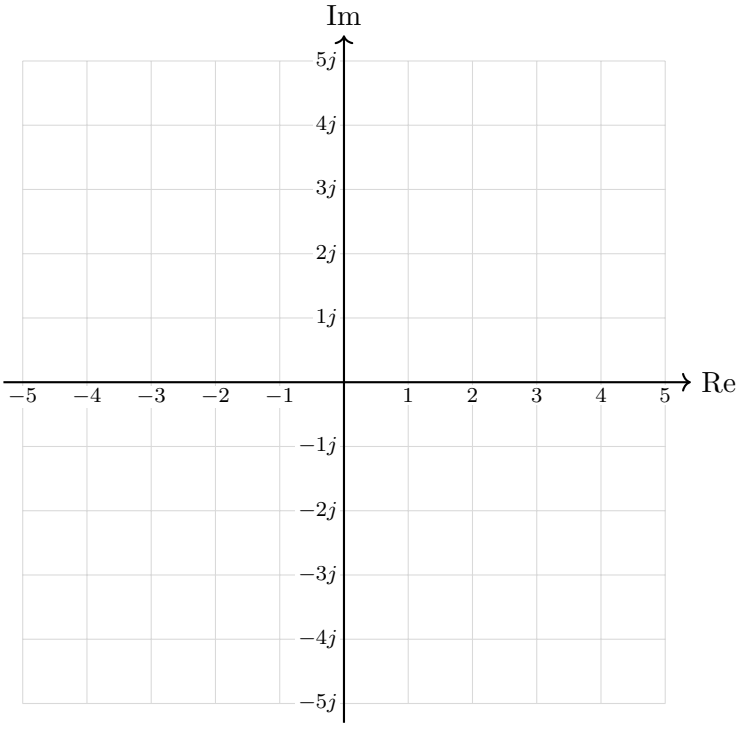


Figure 4: Pole-zero sketch of $G_2(s)$.

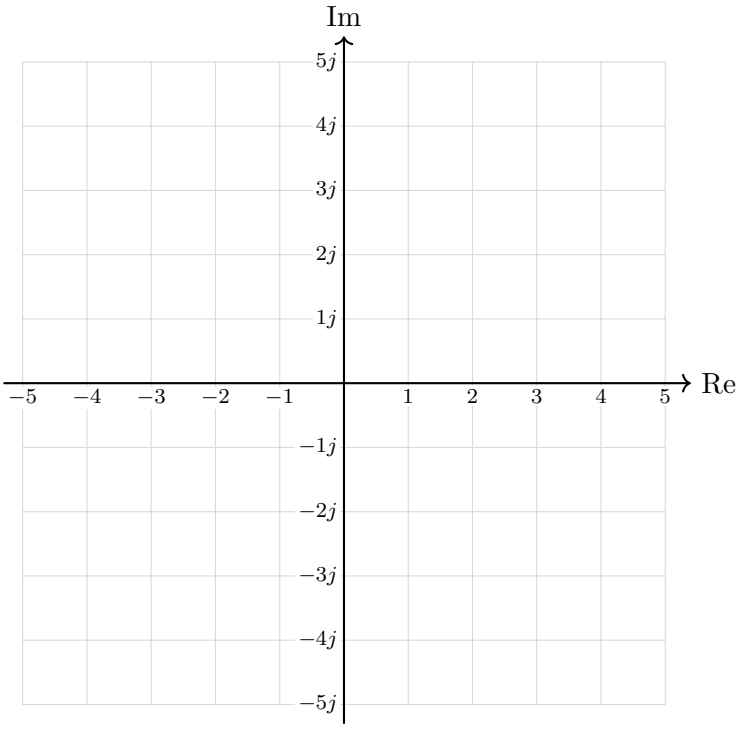


Figure 5: Pole-zero sketch of $G_3(s)$.

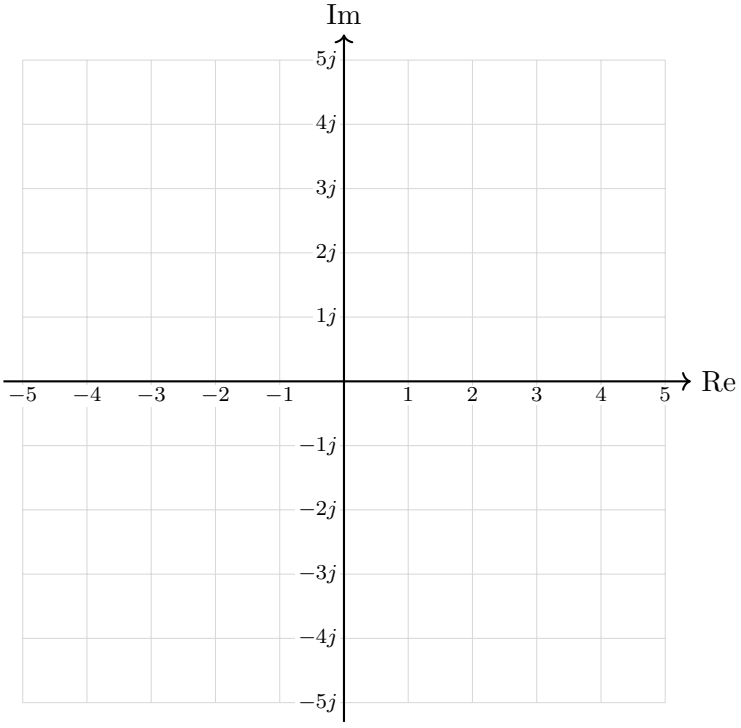


Figure 6: Pole-zero sketch of $G_4(s)$.

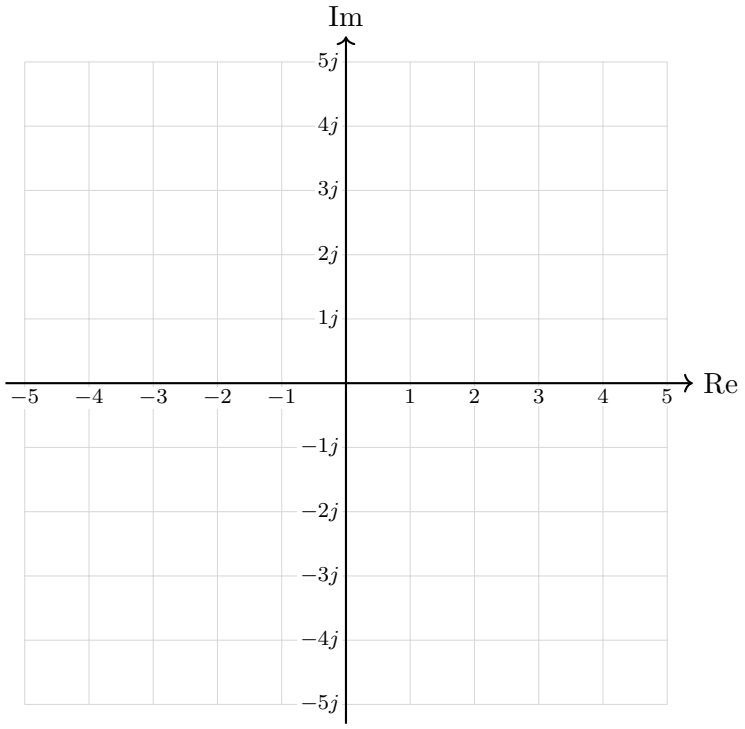


Figure 7: Pole-zero sketch of $G_5(s)$.

Problem 2.C — Damping factor

$$\alpha_2 = 1 \tag{20}$$
$$\omega_2 = \pm 3 \tag{21}$$
$$\omega_{2n} = \sqrt{\alpha_2^2 + \omega_2^2} \tag{22}$$
$$\omega_{2n} = \sqrt{10} \tag{23}$$
$$\rho_2 = \frac{1}{\sqrt{10}} \tag{24}$$

$$\alpha_4 = 0.109 \tag{25}$$
$$\omega_4 = \pm 2.3664 \tag{26}$$
$$\omega_{4n} = \sqrt{\alpha_4^2 + \omega_4^2} \tag{27}$$
$$\rho_4 = \frac{\alpha_4}{\sqrt{\alpha_4^2 + \omega_4^2}} \tag{28}$$

Code: `hw_05_2_C.m`

```
a_2 = 1;
w_2 = 3;

p_2 = a_2/sqrt(a_2^2 + w_2^2)

disp("-------")

a_4 = 0.109;
w_4 = 2.3664;

p_4 = a_4/sqrt(a_4^2 + w_4^2)
```

Output: `output/hw_05_2_C.txt`

```
p_2 = 0.3162
-------
p_4 = 0.046013
```