Homework 7

EE 999 — Introduction to Control Systems

Patrick Gordon • October 31, 2026

Due Wednesday, November 4, 2026

Problem 1 — Review questions 4.1 and 4.2

4.1 Give three advantages of feedback in control.

Feedback can:

- reduce the steady state error inherent to a system
- reduce the impact of disturbances to a system
- provide stability to unstable systems

4.2 Give two disadvantages of feedback in control.

Feedback typically requires:

- more logical complexity
- physical sensors (cost association)

Problem 2 — Text problem 4.6

Consider the DC motor control system with rate (tachometer) feedback shown in Fig. 4.26(a).

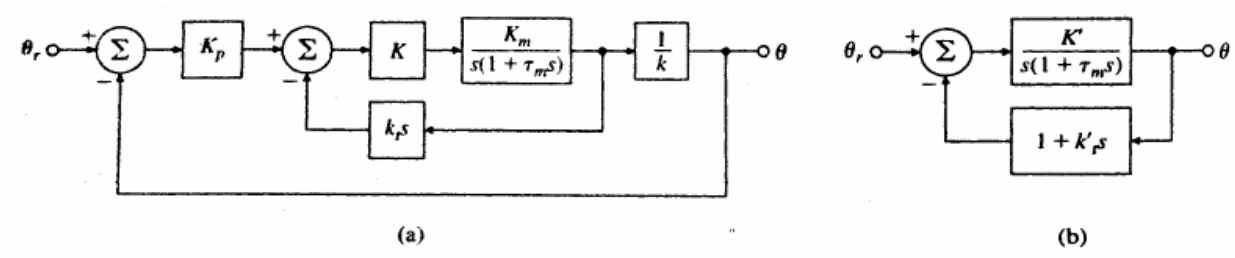


Figure 4.26
Control system for Problem 4.6

Figure 1: Text figure 4.26 (8th Ed.).

Problem 2.A

Find values for K' and k_t' so that the system of Fig. 4.26(b) has the same transfer function as the system of Fig. 4.26(a).

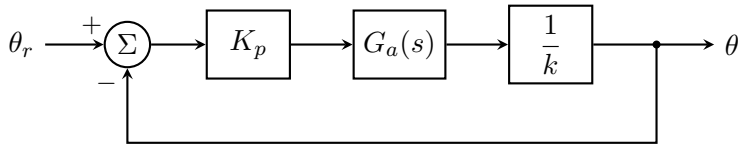


Figure 2: Fig. 4.26(a) with the inner summing junction and tachometer loop combined into the single block $G_a(s)$.

$$G_a(s) = \frac{KK_m}{s(1+\tau_m s)} \frac{1}{1 + k_t s \frac{KK_m}{s(1+\tau_m s)}} \tag{1}$$

$$= \frac{KK_m}{s(1+\tau_m s)} \frac{s(1+\tau_m s)}{s(1+\tau_m s) + k_t s KK_m} \tag{2}$$

$$= \frac{KK_m}{s(1+\tau_m s) + KK_m k_t s} \tag{3}$$

$$\frac{\theta_a}{\theta_r} = \frac{K_p \frac{1}{k} \frac{KK_m}{s(1+\tau_m s)+KK_m k_t s}}{1 + K_p \frac{1}{k} \frac{KK_m}{s(1+\tau_m s)+KK_m k_t s}} \tag{4}$$

$$= \frac{K_p KK_m}{k\left(s(1+\tau_m s) + KK_m k_t s\right) + K_p KK_m} \tag{5}$$

$$= \frac{K_p KK_m}{k\tau_m s^2 + k(1 + KK_m k_t)s + K_p KK_m} \tag{6}$$

$$\frac{\theta_b}{\theta_r} = \frac{\frac{K'}{s(1+\tau_m s)}}{1 + (1 + k_t' s)\frac{K'}{s(1+\tau_m s)}} \tag{7}$$

$$= \frac{K'}{s(1 + \tau_m s) + (1 + k_t' s)K'} \tag{8}$$

$$= \frac{K'}{\tau_m s^2 + (1 + K' k_t')s + K'} \tag{9}$$

$$\frac{K_p K K_m}{k\tau_m s^2 + k(1 + K K_m k_t)s + K_p K K_m} = \frac{K'}{\tau_m s^2 + (1 + K' k_t')s + K'} \tag{10}$$

$$\frac{K_p K K_m / k}{\tau_m s^2 + (1 + K K_m k_t)s + K_p K K_m / k} = \frac{K'}{\tau_m s^2 + (1 + K' k_t')s + K'} \tag{11}$$

$$K' = \frac{K_p K K_m}{k} \tag{12}$$

$$K' k_t' = \frac{K_p K K_m}{k} k_t' = K K_m k_t \tag{13}$$

$$k_t' = \frac{k k_t}{K_p} \tag{14}$$

Problem 2.B

Determine the system type with respect to tracking θ_r and compute the system K_v in terms of parameters K' and k_t'.

$$E_{cl} = \theta_r - \theta_b \tag{15}$$

$$\frac{E_{cl}}{\theta_r} = 1 - \frac{\theta_b}{\theta_r} \tag{16}$$

$$= 1 - \frac{K'}{\tau_m s^2 + (1 + K' k_t')s + K'} \tag{17}$$

$$= \frac{\tau_m s^2 + (1 + K' k_t')s + K' - K'}{\tau_m s^2 + (1 + K' k_t')s + K'} \tag{18}$$

$$= \frac{s(\tau_m s + 1 + K' k_t')}{\tau_m s^2 + (1 + K' k_t')s + K'} \tag{19}$$

Check against a step function:

$$e_{ss} = \lim_{s \to 0} s \, \frac{1}{s} \, \frac{s(\tau_m s + 1 + K' k_t')}{\tau_m s^2 + (1 + K' k_t')s + K'} \tag{20}$$

$$= \lim_{s \to 0} \frac{s(\tau_m s + 1 + K' k_t')}{\tau_m s^2 + (1 + K' k_t')s + K'} \tag{21}$$

$$= \frac{0}{K'} = 0 \tag{22}$$

Check against a ramp function:

$$e_{ss} = \lim_{s\to 0} s\,\frac{1}{s^2}\,\frac{s(\tau_m s + 1 + K'k'_t)}{\tau_m s^2 + (1 + K'k'_t)s + K'} \tag{23}$$

$$= \lim_{s\to 0} \frac{\tau_m s + 1 + K'k'_t}{\tau_m s^2 + (1 + K'k'_t)s + K'} \tag{24}$$

$$= \frac{1 + K'k'_t}{K'} \tag{25}$$

The system is type 1.

$$K_v = \frac{1}{e_{ss}} = \frac{K'}{1 + K'k'_t} \tag{26}$$

Problem 2.C

Does the addition of tachometer feedback with positive k_t increase or decrease K_v?

From equation (12) we have

$$K' = \frac{K_p K K_m}{k} \tag{12}$$

and from equation (14) we have

$$k'_t = \frac{k k_t}{K_p} \tag{14}$$

$$K_v = \frac{K'}{1 + K'k'_t} \tag{27}$$

$$= \frac{\frac{K_p K K_m}{k}}{1 + \frac{K_p K K_m}{k}\frac{k k_t}{K_p}} \tag{28}$$

$$= \frac{\frac{K_p K K_m}{k}}{1 + K K_m k_t} \tag{29}$$

$$= \frac{K_p K K_m}{k(1 + K K_m k_t)} \tag{30}$$

K_v decreases as positive k_t grows in magnitude.

Problem 3 — Working with a control loop and poles and zeros

For a system described by the block diagram of figure 3.

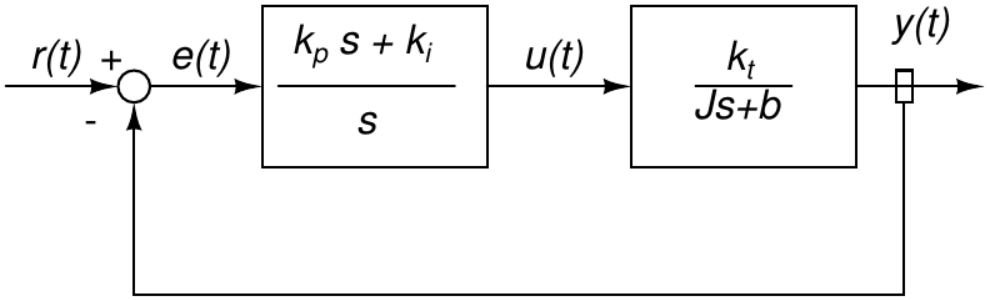


Figure 3: Block diagram of motor with control.

Problem 3.A

Form the transfer function $T_{ry}(s)$.

$$G_1 = \frac{k_p s + k_i}{s} \tag{31}$$

$$G_2 = \frac{k_t}{Js + b} \tag{32}$$

$$Y(s) = \frac{G_1 G_2}{1 + G_1 G_2} R(s) \tag{33}$$

$$= \frac{\frac{k_p s + k_i}{s}\frac{k_t}{Js+b}}{1 + \frac{k_p s + k_i}{s}\frac{k_t}{Js+b}} R(s) \tag{34}$$

$$= \frac{k_t(k_p s + k_i)}{s(Js + b) + k_t(k_p s + k_i)} R(s) \tag{35}$$

$$= \frac{k_t(k_p s + k_i)}{Js^2 + (b + k_t k_p)s + k_t k_i} R(s) \tag{36}$$

$$T_{ry}(s) = \frac{Y(s)}{R(s)} = \frac{k_t(k_p s + k_i)}{Js^2 + (b + k_t k_p)s + k_t k_i} \tag{37}$$

Problem 3.B

With parameters $k_p = 1.5$, $k_i = 0.4$, $k_t = 1.8$, $J = 15$, $b = 2.0$, determine the numerical values for the numerator and denominator of $T_{ry}(s)$.

$$T_{ry}(s) = \frac{(1.8)\big((1.5)s + (0.4)\big)}{(15)s^2 + \big((2.0) + (1.8)(1.5)\big)s + (1.8)(0.4)} \tag{38}$$

$$= \frac{2.7s + 0.72}{15s^2 + (2.0 + 2.7)s + 0.72} \tag{39}$$

$$= \frac{2.7s + 0.72}{15s^2 + 4.7s + 0.72} \tag{40}$$

Problem 3.C

What are the poles and zeros of $T_{ry}(s)$?

Code: `hw_07_3C.m`

```
% Poles and zeros of T_ry(s) = (2.7s + 0.72) / (15s^2 + 4.7s + 0.72)
num = [2.7 0.72];
den = [15 4.7 0.72];

zeros_Try = roots(num)
poles_Try = roots(den)
```

Output: `output/hw_07_3C.txt`

```
zeros_Try = -0.2667
poles_Try =

  -0.1567 + 0.1532i
  -0.1567 - 0.1532i
```

Problem 3.D

Based on the closed-loop poles, determine these four quantities. For each, write the expression that is used to calculate an approximate value from the pole locations.

D.1) T_r, the rise time

write the answer here

D.2) ρ, the damping factor

write the answer here

D.3) P.O., the percent overshoot

write the answer here

D.4) T_s, the settling time

write the answer here

Problem 3.E

In Matlab, setup the system object, plot the step response, and directly measure the four quantities above.

write the answer here

Problem 3.F

In parts D and E you computed performance characteristics in two ways, (a) by location of the dominant poles, and (b) by computing and measuring the step response. These two approaches are characterized by (i) one approach is approximate, but provides equations that can be used for design; (ii) one approach is exact, but applies only to that specific system, and generally does not provide design insight. Match each of methods a and b to characterizations i and ii.

write the answer here

Problem 3.G

Now change parameters to $k_p = 5.0$ and $k_i = 1.2$. What are the new closed-loop pole locations? Make a plot of the S-plane. Plot the original closed-loop pole locations (from part C), and the new closed-loop pole locations.

write the answer here

Problem 3.H

Without calculating any quantities, but looking at how the poles moved, and considering the analysis equations (in part D),

H.1) Do you expect the rise time to be faster or slower?

write the answer here

H.2) Do you expect the damping factor to be greater or less?

write the answer here

H.3) Do you expect the percentage overshoot to be greater or less?

write the answer here

H.4) Do you expect the settling time to be greater or less?

write the answer here

Problem 3.I

In Matlab, setup the new $G_c(s)$ and $T_{ry}(s)$ as in part E, and run `stepinfo(Try)`*. How did the values of T_r, ρ, PO, T_s change relative to what you got in part E? Did the changes agree with your expectations?*

write the answer here

Problem 4 — Text problem 4.7

A block diagram of a control system is shown in Fig. 4.27.

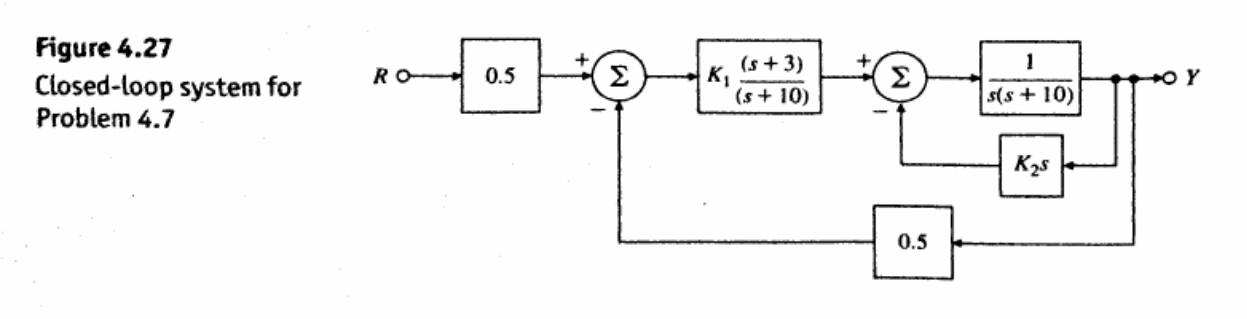


Figure 4: Text figure 4.27 (8th Ed.).

Problem 4.A

If r is a step function and the system is closed-loop stable, what is the steady-state tracking error?

write the answer here

Problem 4.B

What is the system type?

write the answer here

Problem 4.C

What is the steady-state error to a ramp velocity 5.0 if $K_2 = 2$ and K_1 is adjusted to give a system step overshoot of 17%?

write the answer here