AssistVision: A Turntable–Load-Cell Rig and a Controlled Benchmark of Monocular versus Multi-View Food Volume Estimation

[Author names]
[Affiliation]

Abstract*—Image-based portion estimation needs metric volume, and a single image does not contain metric scale. We build a low-cost capture rig ($\leq$ INR 4,220 at indicative prices; ESP32-S3 camera, stepper turntable, HX711 load cell, printed ArUco mat) that returns N calibrated views together with the true mass of the plate, and we ask, with controlled experiments rather than anecdotes, when a single-view depth network can replace multi-view reconstruction. On the 507-dish Nutrition5k depth test split we benchmark four monocular depth models under three explicitly separated calibration protocols (raw, deployable anchor, oracle upper bound) and report bootstrap confidence intervals and paired tests. On 11 synthetic plates with exact mesh volume we compare dense multi-view stereo against exact volume and specify ablations of view count, sensor resolution, JPEG quality, marker-scale error and plate material. *These are partial-run results: seven of eleven planned depth models and 11 of 22 synthetic scenes had finished at the time of writing.* Deployable table-only anchoring of relative models fails from an overhead view (median volume error $\geq$92.7 %), because a fronto-parallel plane cannot fix both scale and shift, and metric indoor models used as-is overestimate volume roughly eightfold at plate distance. With an oracle fit the best model (DA-V2-B) reproduces sensor volume to 13.0 % median error when the sensor's support plane is used, but to only 32.1 % when the plane is fitted in its own prediction. Dense 24-view MVS with marker scale reaches 3.9 % [1.0, 5.7] median absolute error against exact mesh volume, while sparse SfM alone misses 92.4 %. Accuracy collapses below 12 views and under heavy JPEG compression, but not at half resolution. Even sensor-depth volume predicts weighed mass worse than the dataset mean (68.2 vs 52.0 % median error), which is why the rig weighs the plate. No result in this paper comes from the physical rig.

I. Introduction

Dietary assessment by photograph is attractive because it removes manual logging, but portion size—grams—is the quantity nutrition depends on and the one images recover worst. Perspective projection discards absolute scale: a small plate near the camera and a large plate far away produce the same pixels. Any system must inject metric scale from outside the image: from a reference object, from a depth sensor, from camera motion with known geometry, or from a learned prior. This paper measures how much each of these choices costs.

Our contributions are:

1) An open hardware capture rig (Sec. IV) that produces multi-view images, metric scale and gravimetric ground truth in one button press, with firmware, host software, wiring and a bench-test protocol.
2) A benchmark of monocular depth models for food on real RGB-D data (Nutrition5k) that separates deployable calibration from oracle calibration, a distinction prior food-volume work often blurs.
3) A controlled synthetic study with exact mesh volumes comparing dense MVS against ground truth, plus an ablation protocol for the factors the rig designer controls: views, resolution, compression, marker accuracy and serveware material.
4) A documented record of design decisions and rejected alternatives (Sec. III), each tied to a measurement or a stated assumption.

II. Related Work

Food volume. Nutrition5k [1] provides overhead RGB-D video and weighed dishes; its depth-based volume baseline uses a constant per-pixel footprint at the capture-plane distance. Multi-view food reconstruction has used structure-from-motion with reference cards and dense stereo [2], [3]. **Monocular depth.** Relative depth models (MiDaS [4], Depth Anything [5], [6]) predict depth up to an unknown affine transform of inverse depth; metric models (ZoeDepth [7], Depth Pro [8], metric-finetuned Depth Anything V2) predict absolute depth from priors learned on room- and street-scale scenes. **Reconstruction.** We use COLMAP [9] for SfM and OpenMVS for dense MVS.

III. Design Decisions and Rejected Alternatives

Table I summarises each decision; the evidence column points to the experiment that supports it. Decisions marked *assumption* rest on datasheets or cost quotes, not on our measurements.

IV. Hardware

The rig (Figs. 1–3) uses an ESP32-S3 camera board (OV2640, up to 1600 $\times$ 1200), a 28BYJ-48 stepper through a ULN2003 driver (4076 half-steps per revolution, 0.088° per step), and a 5 kg bar load cell read by an HX711 at 10 Hz. The firmware exposes `/capture`, `/rotate`, `/weight`, `/tare`,

TABLE I
DESIGN DECISIONS, ALTERNATIVES CONSIDERED, AND THE EVIDENCE BEHIND EACH CHOICE.

Decision	Chosen	Rejected alternatives	Why / evidence
Scale source	Printed ArUco mat, multi-view triangulation	Credit-card reference in one image; metric monocular depth; depth sensor	Volume scales with the *cube* of length error (Sec. V-B); metric networks are off by large factors at plate distance (Table II); a D435-class sensor costs $\sim$10$\times$ the camera (assumption).
Geometry	Dense MVS (COLMAP + OpenMVS)	Sparse SfM points only; single-view depth	Sparse points under-cover low-texture food (Sec. VI-C); single view cannot see the far side of a mound even with perfect depth.
Capture motion	Fixed camera, motorised turntable	Hand-held phone orbit; multi-camera ring	Repeatable baselines and known angles; one camera keeps cost and synchronisation trivial; the angle prior is checked against SfM.
Camera tilt	45° elevation	Straight overhead (Nutrition5k)	Overhead view makes the support plane fronto-parallel: the relative-depth anchor fit becomes rank-deficient (condition number 10^{14}, Sec. V-C).
Controller	ESP32-S3 + OV2640	Raspberry Pi + camera; smartphone app	Pi adds cost, boot time and an OS to maintain; phones vary per user and cannot drive the turntable or scale. Processing is host-side, so the MCU only needs camera, Wi-Fi and GPIO (assumption: cost table in hardware README).
Ground truth	5 kg bar load cell + HX711 under the plate	External kitchen scale; no mass at all	In-rig weighing removes a manual step and lets every scan carry its own reference; tare-before-serve gives food-only mass.
Volume integral	Height field over the fitted support plane	Constant per-pixel footprint (Nutrition5k); voxel carving; mesh + watertight closure	Exact on tilted planes in our unit tests (0.09 % error) where the constant-footprint formula is not; shared across all methods so comparisons measure geometry, not bookkeeping.
Mono calibration	Report raw / anchor / oracle separately	Report only oracle-aligned numbers	Oracle alignment uses the ground truth being evaluated; it is an upper bound, not a deployable result.

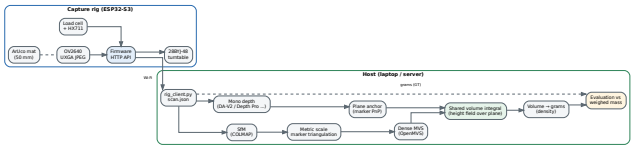


Fig. 1. System architecture. The rig exposes an HTTP API; the host drives the scan loop, so dropped frames are retried rather than corrupting a scan.

`/calibrate` and camera-setting endpoints. Exposure, gain and white balance are locked after convergence so that all views of a scan share photometry, which MVS assumes. Stepper coils are released while weighing to avoid heating and vibration of the load cell. Tare and the counts-per-gram calibration persist in flash. The firmware compiles for the ESP32-S3 target with the Arduino core 3.3.12; a fake-firmware test exercises every client endpoint, retry on a dropped frame, and calibration arithmetic.

Physical validation (pending). Load-cell linearity, repeatability and drift, turntable angular error, scan duration and transfer latency are specified as scripted bench tests (`rig_client.py bench-*`) whose results are not yet measured, because the rig has not yet been assembled. We report no physical number we have not measured.

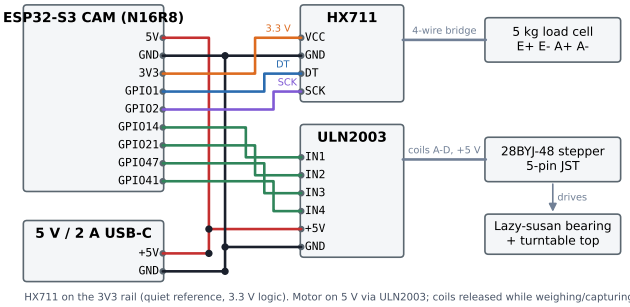


Fig. 2. Wiring of the ESP32-S3, HX711 load-cell amplifier and ULN2003 stepper driver.

V. METHOD

A. Shared volume integral

All methods produce a 3-D point set P in metres and a support plane $(\mathbf{n}, d)$ oriented towards the camera. Each point gets a height $h = \mathbf{n}^\top \mathbf{p} + d$ and plane coordinates in an

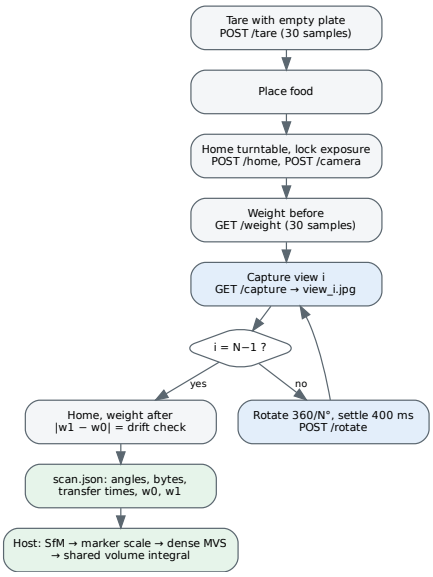


Fig. 3. Scan protocol implemented by `rig_client.py scan`. Weight is read before and after the turntable moves; their difference is a per-scan drift/vibration check.

orthonormal basis; points are binned into square cells of side c and each cell keeps the median height. Empty cells inside the footprint are filled by nearest neighbour, negative heights are clipped, and

$$V = c^2 \sum_{\text{cells}} \max(h, 0). \tag{1}$$

Because monocular, multi-view and sensor depth all share this integral, differences in volume reflect differences in geometry, not in post-processing.

B. Metric scale from the marker mat

Marker corners are detected in every view and triangulated with the SfM cameras; the scale s is the ratio of the known side to the median triangulated side. A relative error ϵ in s produces a volume error of $(1+\epsilon)^3 - 1 \approx 3\epsilon$, so a 1 % scale error costs about 3 % in volume; Sec. VI-C measures this directly.

C. Monocular protocols

Raw: the model's metric output is used as-is. **Anchor**: the prediction is calibrated using only the support plane (the table in Nutrition5k, the marker mat in our rig), never the food; metric outputs get one scale, relative outputs an affine map of inverse depth. **Oracle**: the same maps fitted to ground-truth depth over the whole dish region—an upper bound that is not available at deployment. For relative models we record the condition number of the anchor fit; a fronto-parallel plane has nearly constant inverse depth, so scale and shift are not separately identifiable.

VI. Experiments

A. E1: Monocular depth on Nutrition5k

Anchoring on the table fails from overhead. All four relative models have a median volume error of 92.7–99.4 % under the deployable anchor protocol (Table II), even though their predicted table is flat to 0.6–0.7 mm RMS: the affine fit reproduces the table and collapses the food relief. The anchor fit is badly conditioned on most dishes (Fig. 4), as expected when the only reference is a plane almost perpendicular to the optical axis. This is the quantitative reason the rig views the plate at 45° and uses the marker mat and multiple views.

Metric models are not metric at plate distance. Used as-is, the three DA-V2 metric indoor models have AbsRel 1.33–2.03 and a median volume error of 759–801 %: 36 cm is far outside the room-scale depths they were trained on. After anchoring, the small model reaches 73.5 % [67.3, 80.3], the lowest anchor error of the seven models, but its predicted table is not flat (11 mm RMS against 0.6 mm for the relative models) and only 12 % of dishes fall within 20 %. Under the oracle fit all three metric models (75–100 %) are worse than every relative Depth Anything model. Model size does not order them: B is the worst of the three under every protocol.

Depth metrics do not predict volume. After alignment AbsRel is 0.015–0.125 for every model, yet volume errors span 13–100 %. Food relief (1–3 cm) is a small fraction of the 36 cm camera distance, so a model can score well on depth and still lose most of the volume. We therefore rank models on volume, not on AbsRel.

Oracle upper bound. With an oracle fit DA-V2-B is best of all seven models: 32.1 % [28.5, 35.7] median volume error with its own support plane and 13.0 % with the sensor's plane. Paired Wilcoxon tests with Holm correction separate it from DA-V2-S ($p = 8.6 \times 10^{-10}$), DA-V1-S ($p = 7.8 \times 10^{-18}$) and MiDaS-DPT-Hybrid ($p = 2.2 \times 10^{-55}$). Within Depth Anything V2, the larger encoder helps (B over S), but the gain is small next to the gap between protocols. The gap between the two plane choices shows that fitting the support plane in predicted depth causes more than half of the error; in the rig the marker mat provides this plane independently of the network.

Coverage and failures. 498 of the 503 usable dishes were evaluated for every model. The remaining five have no visible table (degenerate plane fit) and are counted as failures, not dropped. Latency is 1.4–3.8 s per image on 8-vCPU cloud VMs (VM evidence): the relative models ran on a machine shared with other jobs, so their times are upper bounds, and the metric models ran alone on an identical second VM. ZoeDepth, DA-V2-L (relative) and Depth Pro are implemented in the same benchmark but had not finished at the time of writing.

B. E2: Sensor-referenced volume and weighed mass

Nutrition5k has no food-volume label, so the volume target in E1/E2 is the volume integrated from RealSense depth over the dish region with the same height-field integral (Eq. 1)

TABLE II

E1 (NUTRITION5K, n DISHES PER MODEL AS SHOWN). DEPTH ERROR OVER THE DISH REGION AND VOLUME ERROR RELATIVE TO SENSOR-DEPTH VOLUME, PER MODEL AND CALIBRATION PROTOCOL. BRACKETS: 95% BOOTSTRAP CI (10 000 RESAMPLES). LATENCY IS CPU TIME PER IMAGE ON 8-VCPU CLOUD VMS (VM EVIDENCE; SEE TEXT).

Model	Prot.	AbsRel	h MAE (mm)	Vol. APE med. (%)	$\leq$20% (%)	APE, sensor plane (%)	table RMS (mm)	s/img
DA-V2-Metric-Indoor-L	raw	1.546	58.3	759.3 [627.7, 860.3]	2	100.0	26.7	3.80
DA-V2-Metric-Indoor-B	raw	2.028	118.2	772.2 [356.3, 1090.1]	2	100.0	51.5	2.18
DA-V2-Metric-Indoor-S	raw	1.334	55.8	801.3 [645.5, 942.5]	3	100.0	25.4	1.70
DA-V2-Metric-Indoor-S	anchor	0.063	24.4	73.5 [67.3, 80.3]	12	70.7	11.1	1.70
DA-V2-Metric-Indoor-L	anchor	0.057	25.8	82.7 [77.7, 86.4]	12	75.6	10.5	3.80
DA-V2-B	anchor	0.038	13.4	92.7 [90.1, 95.4]	4	84.9	0.6	2.89
DA-V1-S	anchor	0.039	13.6	94.8 [92.9, 96.0]	3	86.1	0.6	1.64
DA-V2-S	anchor	0.038	13.4	96.0 [93.4, 97.8]	3	86.9	0.6	1.85
MiDaS-DPT-Hybrid	anchor	0.045	15.8	99.4 [98.9, 99.8]	1	93.7	0.7	1.39
DA-V2-Metric-Indoor-B	anchor	0.125	45.8	99.7 [98.7, 99.9]	7	99.6	18.3	2.18
DA-V2-B	oracle	0.015	11.8	32.1 [28.5, 35.7]	29	13.0	2.7	2.89
DA-V2-S	oracle	0.016	12.0	37.4 [33.0, 41.9]	26	14.1	2.6	1.85
DA-V1-S	oracle	0.017	10.3	47.6 [42.9, 51.8]	17	17.2	2.4	1.64
DA-V2-Metric-Indoor-S	oracle	0.042	25.3	75.2 [67.1, 80.7]	12	44.3	10.9	1.70
DA-V2-Metric-Indoor-L	oracle	0.037	25.9	85.5 [80.8, 89.2]	11	41.6	10.4	3.80
MiDaS-DPT-Hybrid	oracle	0.022	11.4	86.9 [82.7, 89.0]	3	33.8	1.1	1.39
DA-V2-Metric-Indoor-B	oracle	0.068	42.7	99.8 [99.2, 100.0]	6	67.3	17.5	2.18

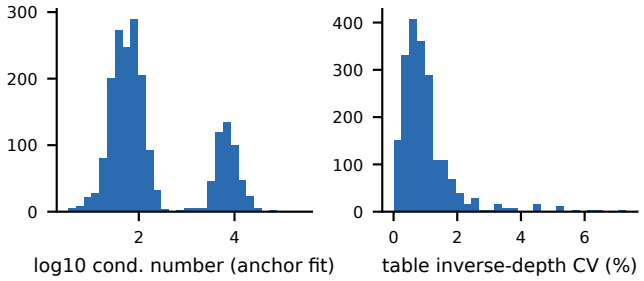


Fig. 4. Anchor-fit conditioning on Nutrition5k (relative models): condition number of the affine fit (left) and coefficient of variation of table inverse depth (right). A low CV means the table alone cannot separate scale from shift.

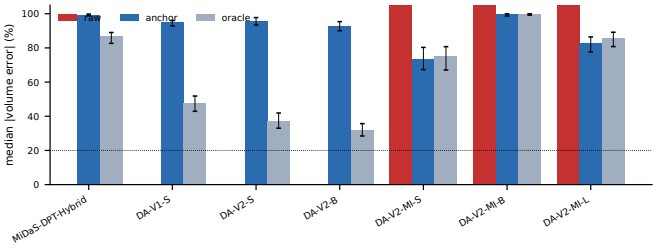


Fig. 5. Per-dish absolute volume error versus sensor depth, by model and protocol (Nutrition5k).

applied to each model's prediction. The error therefore isolates the depth model: a model with zero error here reproduces the sensor, whatever the sensor's own error on food is. Even sensor-depth volume with a cross-validated density predicts mass worse than ignoring the image and predicting the mean (Table III). Sensor volume and weighed mass are only weakly correlated (Pearson $r = 0.19$, Spearman $\rho = 0.17$, $n = 503$). Mixed dishes differ in density, and the dish region includes the plate rim. A single image-derived volume therefore cannot

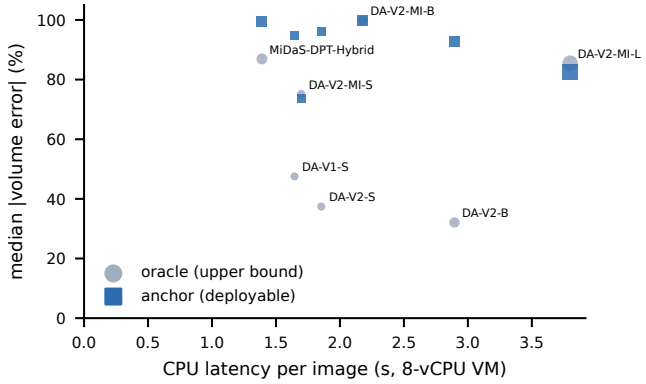


Fig. 6. Accuracy–latency trade-off (anchor protocol; CPU latency on 8-vCPU cloud VMs).

stand in for grams on real dishes, and this is the quantitative case for weighing the plate in the rig. Mass counts n vary because dishes with a non-positive predicted volume are excluded from the density fit.

C. E3: Multi-view versus monocular on exact synthetic volumes

Scenes. We specify twenty-two Blender (Cycles) scenes with watertight food meshes whose volume is computed exactly from the mesh: eight food configurations (single rice mound, rice + dal, two idli, curry heap, lumpy rice, a three-item thali, a 40 mL small portion and a tall mound) on ceramic and polished steel plates, four textureless variants and two on banana leaf. At the time of writing, 11 had been rendered and reconstructed: rice mound, rice + dal, two idli, curry heap and lumpy rice on both plates, and the three-item thali on ceramic. Only these are reported. Each scene is rendered at 1600×1200, 60° horizontal FoV, 45° elevation and 0.40 m distance, with the plate rotating on a turntable inside a printed 50 mm ArUco

TABLE III
E2 (NUTRITION5K). MASS PREDICTED AS ρV WITH A SINGLE DENSITY ρ FITTED ON FOUR FOLDS AND SCORED ON THE HELD-OUT FOLD (5-FOLD CV). BRACKETS: 95 % BOOTSTRAP CI.

Volume source	n	MAE (g)	median APE (%)
RealSense depth (sensor ceiling)	503	139.3 [129.3, 150.0]	68.2 [63.1, 72.9]
DA-V2-B, oracle	485	177.2 [164.4, 191.1]	83.8 [82.0, 86.1]
DA-V2-S, oracle	483	178.1 [161.6, 196.6]	85.7 [84.2, 87.5]
DA-V1-S, oracle	491	180.4 [167.2, 194.1]	88.2 [85.7, 89.6]
DA-V2-Met-S, anchor	475	182.3 [168.4, 197.0]	92.2 [89.7, 94.0]
MiDaS-DPT-Hybrid, oracle	490	193.2 [178.7, 208.5]	96.9 [95.9, 97.6]
DA-V2-Met-S, oracle	475	195.2 [180.5, 211.5]	96.9 [95.8, 97.6]
DA-V2-Met-B, oracle	419	186.2 [171.0, 201.6]	97.0 [95.2, 98.3]
DA-V2-Met-L, anchor	473	198.4 [184.7, 212.8]	97.8 [96.9, 98.4]
DA-V2-B, anchor	492	186.9 [172.8, 202.0]	97.9 [96.5, 98.8]
DA-V2-Met-L, oracle	473	198.8 [185.1, 213.2]	98.1 [97.3, 98.7]
DA-V2-S, anchor	490	189.0 [175.8, 202.7]	98.7 [97.9, 99.3]
DA-V2-Met-B, anchor	421	192.8 [177.6, 208.4]	98.8 [97.8, 99.3]
DA-V1-S, anchor	487	201.6 [186.4, 218.5]	99.5 [99.4, 99.7]
MiDaS-DPT-Hybrid, anchor	441	194.0 [180.1, 208.4]	99.9 [99.8, 100.0]
Predict the mean mass (no image)	503	117.9 [109.8, 126.5]	52.0 [46.1, 57.2]

mat, i.e. the rig geometry. View 0 also stores a metric depth map for a "perfect single-view depth" baseline.

Methods. (i) Dense MVS: COLMAP SfM, marker-triangulated scale, OpenMVS densification, plate-noise-calibrated footprint threshold, shared integral. (ii) Sparse SfM points only, with the same scale and integral. The monocular and perfect-single-view baselines are implemented, but their runs had not finished at the time of writing and are not reported.

Footprint rule. Dense MVS leaves millimetre-level noise on the plate surface. A cell counts as food if its height exceeds $\mu + 2\sigma$ of the plate annulus heights. This rule was fixed on `rice_mound__ceramic` before the other scenes were run, and those scenes are held out. A hysteresis variant (seed at 2σ, grow connected cells down to 0.5σ) was added *after* the curry failure below, and is reported as post hoc.

Table IV gives the results. With the pre-registered footprint rule, dense MVS has a median absolute error of 3.9 % [1.0, 5.7] over 11 scenes, and 10 of 11 are within 10 %. Steel plates (2.0 %) do better than ceramic (5.3 %). The textureless white ceramic gives plate-surface noise of 1.9–6.2 mm, against 0.9–1.2 mm on the textured steel.

Failure case. `curry_heap__ceramic` is -26.0 %: its 6.2 mm plate noise raises the threshold above the low outer skirt of the heap, which is then cut from the footprint. The failure is mostly but not always repeated. Five runs of the identical input on this machine gave -26.0, -26.0, -24.8, -23.1 and $+0.2$ %, and one run on a second VM gave $+0.1$ %. OpenMVS is not deterministic on the textureless plate, and the noise estimate, and with it the threshold, moves between runs. The post-hoc hysteresis rule recovers it (-1.0 %) and lowers the median error to 2.0 %, but its bias is $+4.4$ % and it overestimates lumpy rice on ceramic by 24.2 % and the thali by 17.9 %, where plate noise connects to the food. No single height threshold works on every scene. We keep the pre-registered rule as primary and conclude that *separating food from plate*, not depth accuracy, is now the dominant error of the multi-view pipeline. Image-space food segmentation projected onto the height field is the natural next step. **Sparse is not enough.** Sparse SfM points alone underestimate every scene, with a median error of 92.4 % [77.6, 99.6]: feature points concentrate on the textured mat and food edges, leaving most of the food surface empty. Densification is therefore required, and it is the main cost of a scan. Dense reconstruction takes about 117 s per scene, against 20 s for sparse on the VM CPU (VM evidence).

D. E4: Ablations

The ablations change one factor at a time and use the dense MVS pipeline, except the marker-scale ablation, which used sparse SfM: number of views (6, 8, 12, 16, 24, evenly spaced), image resolution (1600×1200, 800×600, 640×480, the OV2640 UXGA, SVGA and VGA modes), JPEG re-encoding with OpenCV at quality 30 and 10 on its 0–100 scale (this is not the OV2640 0–63 quality register, and we did not measure how the two map), a deliberate error in the printed marker size (± 1, ± 2 %), plate material, and three repeated runs on identical input to measure the run-to-run spread of SfM/MVS, which are not bit-deterministic. A run fails if SfM returns no model, if no marker side is triangulated, or if densification errors; failures are counted, not dropped. The driver (`experiments/synth/run_suite.py`) and the analysis script are in the repository. **Marker-scale error (60 runs, sparse SfM).** We scaled the believed marker side by 0.98–1.02 on 12 scenes. The recovered metric scale tracks the injected factor, but the integrated volume does not change monotonically (mean 71.7, 90.3, 77.9, 66.9 and 47.7 mL for factors 0.98 to 1.02). Two sparse runs of the same input differ by a median of 1.9 and up to 62.9 percentage points of true volume, so run-to-run SfM variation is far larger than the ± 6 % that the cube law predicts for a ± 2 % scale error. The cube law is therefore an analytic bound (Sec. V-B), and this ablation is uninformative on sparse reconstructions. It will be repeated on dense reconstructions.

View count (60 dense runs, 12 scenes). Accuracy collapses below 12 views. The median absolute volume error is 91.6 % [78.7, 96.3] at 6 views and 71.4 % [22.7, 76.5] at 8 views (0 and 2 of 12 scenes within 10 %). It is 3.3 % [0.4, 19.2] at 12, 1.6 % [0.4, 3.6] at 16 and 4.2 % [0.4, 5.6] at 24 views (9, 11 and 12 of 12 within 10 %). The paired difference between 16 and 24 views is not significant ($p = 0.38$, Wilcoxon, $n = 12$). Every view registered at every setting; what drops is dense coverage (median 0.17 M points at 6 views against 1.03 M at 24). Four idli runs at 6 and 8 views return fewer than 1,000 food points and -100 % volume while reporting success, so the pipeline needs a minimum-food-point check before a scan is accepted. We keep 24 views as the default because it is the only setting with all scenes within 10 %; 16 views is the fallback when scan time matters. These runs were split across three identical cloud VMs (8-vCPU Xeon, same package versions). The pipeline is not bit-reproducible: the same 24-view input reconstructed on two machines differed by a median of 0.9 percentage points, 10 of 12 scenes within

TABLE IV
E3 (SYNTHETIC, EXACT MESH VOLUME). ABSOLUTE VOLUME ERROR, MEDIAN AND 95% BOOTSTRAP CI OVER SCENES; BIAS IS THE MEAN SIGNED ERROR. TIME IS VM CPU SECONDS PER SCENE.

Method	Plate	n ok	$\|e\|$ % median [95% CI]	bias %	<10%	s
MVS dense (24 views)	all	18/18	5.0 [2.5, 11.7]	-12.3	13	120
MVS dense (24 views)	ceramic	10/10	11.4 [4.2, 47.7]	-20.0	5	117
MVS dense (24 views)	steel	8/8	3.0 [0.2, 5.1]	-2.7	8	123
MVS dense, hysteresis (post-hoc)	all	18/18	2.7 [0.9, 11.5]	-0.3	13	120
MVS dense, hysteresis (post-hoc)	ceramic	10/10	12.0 [3.7, 35.1]	-0.1	5	117
MVS dense, hysteresis (post-hoc)	steel	8/8	0.6 [0.1, 2.0]	-0.4	8	123
SfM sparse (24 views)	all	11/11	92.4 [77.6, 99.6]	-89.5	0	20
SfM sparse (24 views)	ceramic	6/6	93.6 [82.6, 99.8]	-92.0	0	20
SfM sparse (24 views)	steel	5/5	81.4 [75.4, 100.0]	-86.5	0	21

1.2 points, but by 4.9 points on `thali3__ceramic` and 26.1 points on `curry_heap__ceramic` ($-26.0\,\%$ vs. $+0.1\,\%$).

Resolution and compression (72 dense runs, 12 scenes). Resolution matters less than compression. Median absolute volume error is 3.9 % [0.8, 5.1] at 1600×1200 lossless and 3.2 % [2.1, 4.0] at 800×600 lossless (12 of 12 within 10 %; paired $p = 0.27$). OpenCV quality 30 at full resolution is 7.4 % [2.4, 8.6] (12 of 12 within 10 %, $p = 0.18$). Quality 10 fails at every resolution: 72.7 % at 1600×1200, 90.4 % at 800×600 and 82.7 % at 640×480 (at most 1 of 12 within 10 %; $p = 4.9 \times 10^{-4}$ for each against the lossless baseline, significant after Holm correction over five comparisons). Heavy compression removes the fine texture that dense matching needs. For the rig this means a low compression setting on the camera matters more than its maximum resolution; we did not measure how the OV2640 quality register maps onto these OpenCV levels, so the rig default has to be checked on hardware.

Repeat runs (18 dense runs, 6 scenes, one machine). Three runs on identical input stay within 0.2–0.9 percentage points of each other on steel plates and within 1.8–2.9 points on ceramic. The spread is again larger on the textureless plate.

Status. Plate material beyond ceramic and steel (banana leaf) and textureless food had not finished at the time of writing. Two observations are already available from E3. Ceramic and steel differ in plate noise by about 2–5× (plate-material ablation). Two independent reconstructions of the same eight scenes differed by up to 2.7 percentage points (e.g. `idli_pair__ceramic` -8.4 vs -5.7 %), which bounds run-to-run repeatability before the formal repeat experiment.

VII. LIMITATIONS

Nutrition5k has no volume ground truth. The dataset provides overhead RealSense depth and weighed mass, not food volume. We therefore score monocular models against the volume integrated from sensor depth over the same dish region (food plus plate rim above the support plane). This measures how well a model reproduces a depth sensor, not how well it measures food. Our attempt to separate food from plate with a second plate-floor plane fit gave a food volume that barely tracks weighed mass (Spearman $\rho = 0.24$, Pearson $r = -0.01$, $n = 502$), so we do not use it as a target. Absolute food-volume accuracy is reported only on synthetic scenes with exact mesh volume.

Synthetic-to-real gap. Blender scenes have perfect camera intrinsics, controlled lighting and procedural textures. Real OV2640 frames add rolling shutter, auto-exposure drift, lens distortion and JPEG blocking on low-texture food. The resolution and JPEG ablations bound part of this gap but not all of it.

No physical measurements yet. Load-cell linearity, repeatability and drift, turntable angular error, scan duration and Wi-Fi transfer latency have scripts and empty tables (Sec. IV); none of the numbers in this paper come from the physical rig. Timings are CPU timings on 8-vCPU cloud VMs, not on the ESP32-S3.

Volume is not mass. Converting volume to grams needs a per-food density. We do not estimate density; the load cell measures mass directly, which is the reason it is part of the rig.

VIII. CONCLUSION

We built a capture rig within an INR 5,000 budget and a benchmark that scores monocular and multi-view volume estimation with the same integral, explicit calibration protocols and confidence intervals. On the partial results, three findings stand. First, a single overhead image anchored only on the table does not recover food volume, whatever the depth model. Second, low depth error (AbsRel) does not imply low volume error. Third, 24-view dense MVS with marker scale reaches a median error of a few percent on exact synthetic volumes, and its remaining error comes from food–plate segmentation. Volume from depth does not predict grams on real mixed dishes, which justifies the load cell. Next we will complete the model and ablation runs, add image-space food segmentation, and run the physical bench tests and real-plate captures.

REPRODUCIBILITY

All code, scene specifications, per-dish result files and the scripts that generate every table and figure are in the repository. Evidence categories are labelled throughout: *Nutrition5k* (public real RGB-D data), *synthetic* (Blender/Cycles renders with exact mesh volume), *VM* (timings on an 8-core CPU-only cloud VM, not on the ESP32), and *physical* (pending rig measurements).

REFERENCES

[1] Q. Thames, A. Karpur, W. Norris, F. Xia, L. Panait, T. Weyand, and J. Sim, "Nutrition5k: Towards automatic nutritional understanding of generic food," in *CVPR*, 2021, pp. 8903–8911.

[2] J. Dehais, M. Anthimopoulos, S. Shevchik, and S. Mougiakakou, "Two-view 3d reconstruction for food volume estimation," *IEEE Trans. Multimedia*, vol. 19, no. 5, pp. 1090–1099, 2017.

[3] F. P. W. Lo, Y. Sun, J. Qiu, and B. Lo, "Image-based food classification and volume estimation for dietary assessment: A review," *IEEE J. Biomed. Health Inform.*, vol. 24, no. 7, pp. 1926–1939, 2020.

[4] R. Ranftl, K. Lasinger, D. Hafner, K. Schindler, and V. Koltun, "Towards robust monocular depth estimation: Mixing datasets for zero-shot cross-dataset transfer," *IEEE TPAMI*, vol. 44, no. 3, pp. 1623–1637, 2022.

[5] L. Yang, B. Kang, Z. Huang, X. Xu, J. Feng, and H. Zhao, "Depth anything: Unleashing the power of large-scale unlabeled data," in *CVPR*, 2024.

[6] L. Yang, B. Kang, Z. Huang, Z. Zhao, X. Xu, J. Feng, and H. Zhao, "Depth anything v2," in *NeurIPS*, 2024.

[7] S. F. Bhat, R. Birkl, D. Wofk, P. Wonka, and M. Müller, "Zoedepth: Zero-shot transfer by combining relative and metric depth," *arXiv:2302.12288*, 2023.

[8] A. Bochkovskii, A. Delaunoy, H. Germain, M. Santos, Y. Zhou, S. R. Richter, and V. Koltun, "Depth pro: Sharp monocular metric depth in less than a second," in *ICLR*, 2025.

[9] J. L. Schönberger and J.-M. Frahm, "Structure-from-motion revisited," in *CVPR*, 2016.