## Q21a)

a. Write a PHP program to **analyse the oxygen count and display condition** as shown below. Use **if** statement. **5 Marks**

| Oxygen Count | Condition |
|---|---|
| >=85 | Normal Condition |
| <85 && >=60 | Below Normal. Required Treatment |
| <60 | Critical. Required Oxygen Supplement |

**Blood Oxygen Level**

**Enter your Oxygen count :**

55 [Display Condition]

Critical. Required Oxygen Supplement

b. Write a PHP program to display **cube of numbers** from **1** to the last number entered in the text box as shown below. (use any looping structure) **5 Marks**

**Cube of Numbers**

**Last Number :** 5 [Display Cube Numbers]

**$1^3$ is : 1**
**$2^3$ is : 8**
**$3^3$ is : 27**
**$4^3$ is : 64**
**$5^3$ is : 125**

```
<h2>Blood Oxygen Level</h2>

<h4>Enter Your Oxygen count :</h2>

<form method="POST">

<input type=text name="dc">

<input type=submit value="Display Condition">

</form>

<?php
```

```
$dc=$_POST['dc'];
if($dc >= "85")
{
        echo"Normal Condition";
}
elseif($dc < "85" && $dc >="60")
{
        echo"Below Normal Required Treatment";
}
elseif ($dc < "60")
        echo"Critical.Required oxygen supplement";


?>
```

## Q21b)

```
<h3> Cube of Numbers</h3><br>
<form method="POST">
Last Number :<input type=text name="ls">
<input type=submit value="Display Cube Numbers"><br>
</form>

<?php
$ls=$_POST['ls'];

for($i=1;$i<=$ls;$i++)
{
        $r=$i**3;
        echo $i."<sup>3</sup> is :  ".$r. "<br>";
}
?>
```

# Q22)

Question **22**

Not yet answered

Marked out of 10.00

Flag question

(MAKE SCREEN SHOT OF PHP PROGRAM AND THE OUTPUT WINDOW. PASTE ALL IN YOUR ANSWER SHEET ALONG WITH THE QUESTION NUMBER)

**Design the form as shown below.** **[3 marks]**

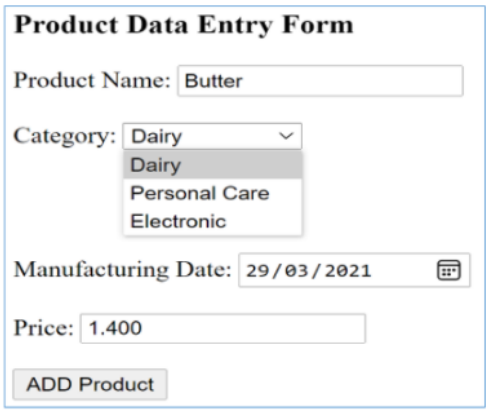


a) Display the output values in the format as shown. **[3 marks]**

Product Name: Butter
Category: Dairy
Manufacturing Date: 2021-03-29

b) Validate the **"Product Name"** field to input only letters & space, 3-20 characters. **[2 marks]**

c) Validate **"Category"** field to select at least one item from the list. **[2 marks]**

```
<h2>Product Data Entry Form </h2>

<form action="22b.php" method="POST">

Product Name: <input type="text" name="pn" pattern="[a-z]+{3,20}" required><br><br>

Category:<select name="c" required >

<option value="">-Choose-</option>

<option value="Dairy">Dairy</option>

<option value="Personal Care">Personal Care</option>

<option value="Electronic">Electronic</option>

</select><br><br>

Manufacturing Date: <input type="date" name="d"><br><br>

Price: <input type="text" name="p"><br><br>
```

```
Gender:<input type="radio" name="g" value="male">male
<input type="radio" name="g" value="female">female<br><br>
Remember Me <input type="checkbox" name="c" value="remeber"><br>

<input type="submit" name="ap" value="ADD Product">
</form>


<?php
$pn=$_POST['pn'];
$c=$_POST['c'];
$d=$_POST['d'];
$p=$_POST['p'];
$g=$_POST['g'];
$ap=$_POST['ap'];

echo "Product Name: $pn <br><br>";
echo "Category: $c <br><br>";
echo "Manufacturing Data: $d <br><br>";

?>
```

**Q23a)**

Question **23**

Not yet answered

Marked out of 10.00

Flag question

**Implement the following using PHP and MYSQL.**

(MAKE SCREEN SHOT OF MY SQL WINDOW (TABLE STRUCTURE AND TABLE DATA), PHP PROGRAM AND THE OUTPUT WINDOW. PASTE ALL IN YOUR ANSWER SHEET ALONG WITH THE QUESTION NUMBERS)

a) Create the following database and table using **MySQL**. **[3 Marks]**

**Database Name: sales**

**Table Name: orders**

b) Insert the following values into the table. **[2 Marks]**

| OrderID | CustomerID | OrderDate | Item | Quantity |
|---|---|---|---|---|
| ODR1 | CID100 | 12/12/2020 | TV | 4 |
| ODR2 | CID103 | 30/1/2021 | AC | 6 |
| ODR3 | CID103 | 5/2/2021 | Vacuum Cleaner | 12 |
| ODR4 | CID104 | 21/2/2021 | Washing Machine | 3 |

c) Write necessary PHP script to **establish a connection** with the database. **[2 Marks]**

d) Display all records from **CustomerID, Item & Quantity** fields to the browser page in a table format by retrieving from the database. **[3 Marks]**

```
<?php
 $dbhost = "localhost";
 $dbuser = "root";
 $dbpwd = "";
 $dbname = "sales";
 $conn = new mysqli( $dbhost, $dbuser, $dbpwd, $dbname );
 echo ( $conn ? 'Database connected Successfully' : 'Database connection failed' ).'<br />';


 $sql='SELECT * FROM orders';
 $res=$conn->query( $sql );
 echo ( $res ? 'Result is Ready' : 'No Result' ) . '<br />';
echo "<table border=1><tr><th>CustomerID</th> <th>Item</th> <th>Quantity</th></tr><br>";
 while( $rs=$res->fetch_object() )
{
```

```
 echo " <tr><td>$rs->CustomerID</td> ";
echo " <td>$rs->Item</td>";
echo " <td>$rs->Quantity </td>";
echo "<br>";
}
 $conn->close();
?>
```