Shahjalal University of Science and Technology

Department of Electrical and Electronic Engineering

Course Title: Basic Electrical and Electronic Circuit

Course Code: EEE 0713 1206B

Experiment 01

Familiarization with Basic Electronic Components, Logic ICs, and Breadboard

---



Submitted By:
Raj Bhowmik
Reg. No: 202561901048
Session: 2024-25
Department of Software Engineering

Submitted To:
Md Rasedujjaman
Associate Professor
Department of Electrical and Electronic Engineering
Shahjalal University of Science and Technology

Submission Date: August 25, 2026


Declaration

I hereby declare that the work presented in this laboratory report entitled **"Familiarization with Basic Electronic Components, Logic ICs, and Breadboard"** is an authentic record of my own work carried out for the course **Basic Electrical and Electronic Circuit (EEE 0713 1206B)**.

This report has been prepared by me independently and has not been submitted elsewhere for the award of any degree, diploma, or credit.

Sylhet, Bangladesh

Date: August 25, 2026



Raj Bhowmik
Reg. No: 202561901048

Contents

Declaration i

List of Figures iii

List of Tables iv

Objective 1

Introduction 1

Theory 1

- Resistors . . . 1
- Capacitors . . . 4
- Inductors . . . 5
- Diodes . . . 5
- Transistors . . . 6
- Digital Logic Gate ICs . . . 6
- Breadboard . . . 7

Apparatus and Components 7

Circuit Diagram 7

Experimental Procedure 7

Observations 8

Discussion 8

Conclusion 9

References 9

List of Figures

1 Overview of Standard Fixed Resistors 1
2 Resistor Color Band Reading System 2
3 Metal Film Resistor 2
4 Standard Wirewound Resistor 3
5 High-Power Wirewound Resistor 3
6 Surface Mount Device (SMD) Resistor 3
7 Variable Resistor (Potentiometer) 4
8 Assorted Capacitor Classification 4
9 Ceramic Disc Capacitors 4
10 Polarized Electrolytic Capacitor 5
11 Film Capacitor 5
12 Light Emitting Diode (LED) Structure and Pinout 6
13 Dual In-Line Package (DIP) IC Outline 6
14 Solderless Breadboard Internal Connection Tracks 7
15 Simple LED test circuit assembled on breadboard with series current-limiting protection. . . . 8

List of Tables

1 Standard Resistor Color Code Reference 2
2 Common 2-Input Logic Gate ICs and Truth Tables 6
3 List of Equipment and Components Used 7
4 Resistor Color Code Reference 8

Objective

- To develop practical capability in recognizing and inspecting standard passive and active electronic parts.
- To master interpretation of physical component markings, schematic icons, and basic semiconductor operations.
- To inspect integrated logic gate ICs and experimentally construct their input-output truth tables.
- To gain hands-on expertise building temporary circuits on a solderless breadboard.
- To utilize a Digital Multimeter (DMM) for quantitative parameter checks and continuity testing.

Introduction

Executing functional circuit design requires an engineer to accurately identify components, decode technical markings, and construct physical prototypes on a breadboard. This introductory lab builds foundational hands-on skill with fundamental passive elements (resistors, capacitors, and inductors), active semiconductor components (diodes and transistors), integrated digital logic gates, and solderless prototyping boards used across future laboratory modules.

Proper component verification—such as decoding color bands on axial resistors or verifying electrolytic capacitor orientation—is crucial for avoiding circuit malfunctions or component destruction. This session establishes these essential skills through direct inspection, multimeter testing, and practical breadboard setup.

Theory

Resistors

Resistors introduce specific opposition to current flow according to Ohm's Law, $V = IR$. Standard axial resistors mark nominal resistance and manufacturing tolerance using color bands. Four-band resistors are read sequentially: bands one and two represent significant digits, band three provides the multiplier (10^n), and band four indicates tolerance.

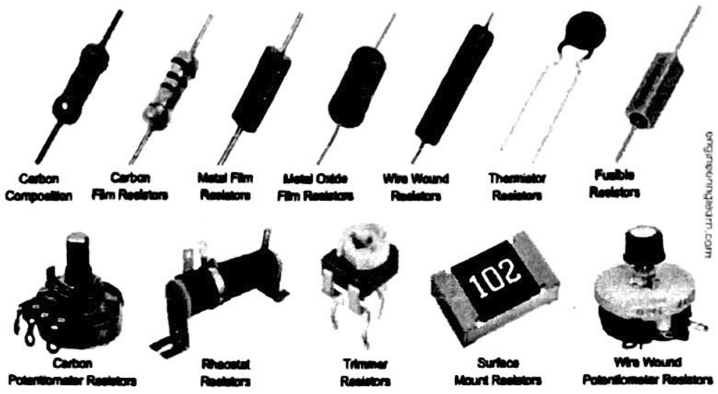


Figure 1: Overview of Standard Fixed Resistors

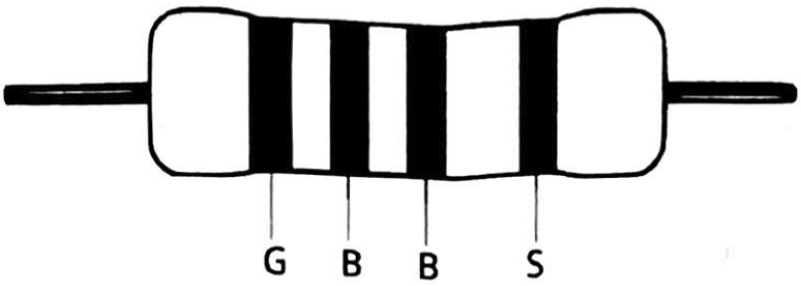


Figure 2: Resistor Color Band Reading System

Table 1: Standard Resistor Color Code Reference

Color	1st Digit	2nd Digit	Multiplier	Tolerance
Black	0	0	10^0	–
Brown	1	1	10^1	$\pm 1\%$
Red	2	2	10^2	$\pm 2\%$
Orange	3	3	10^3	$\pm 3\%$
Yellow	4	4	10^4	–
Green	5	5	10^5	–
Blue	6	6	10^6	–
Violet	7	7	10^7	–
Gray	8	8	10^8	–
White	9	9	10^9	–
Gold	–	–	10^{-1}	$\pm 5\%$
Silver	–	–	10^{-2}	$\pm 10\%$

Common fixed-resistor variants include carbon film, metal film (high precision and low temperature drift), wirewound (suited for high power), and surface-mount devices. Variable resistors (potentiometers) permit manual resistance adjustments using a movable internal wiper.

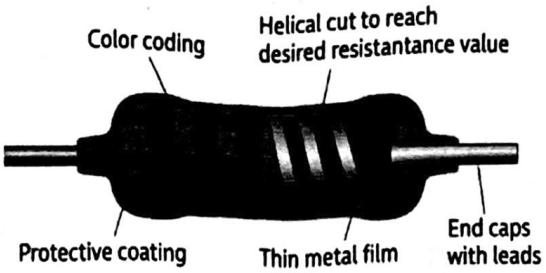


Figure 3: Metal Film Resistor

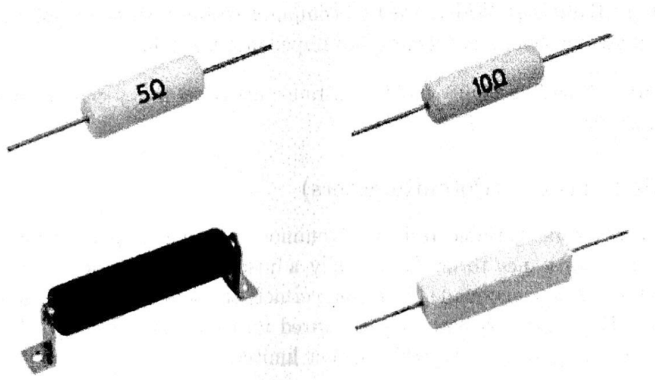


Figure 4: Standard Wirewound Resistor

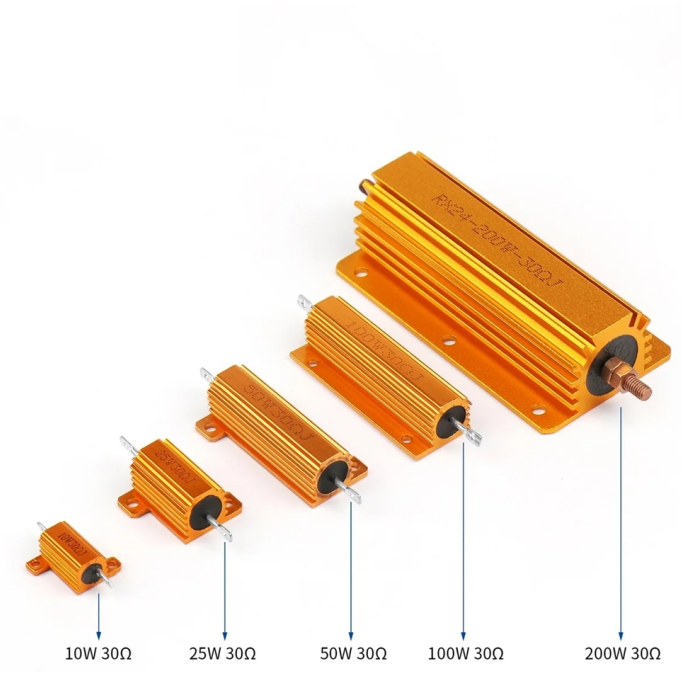


Figure 5: High-Power Wirewound Resistor



Figure 6: Surface Mount Device (SMD) Resistor

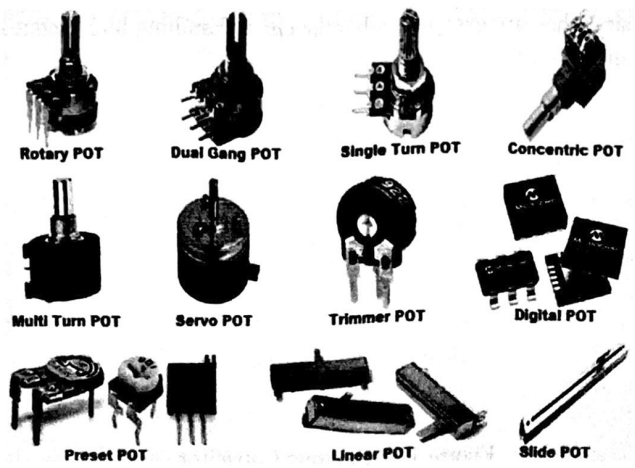


Figure 7: Variable Resistor (Potentiometer)

Capacitors

Capacitors store electrical charge within an electric field generated across dielectric-separated conductive plates. Ceramic capacitors offer non-polarized, compact construction suited for high-frequency decoupling. Electrolytic capacitors provide higher capacitance values within a polarized container, making them ideal for DC smoothing filters. Mylar and tantalum capacitors provide stable operation in precision and high-density layouts.

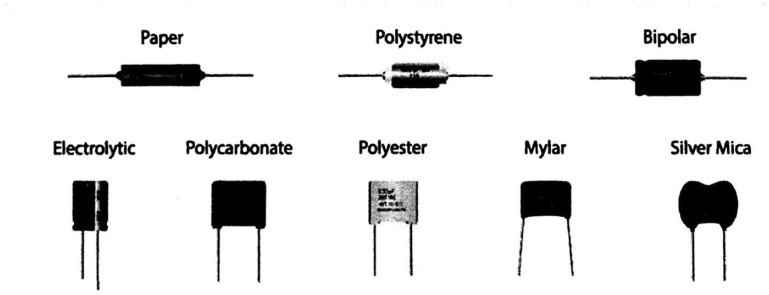


Figure 8: Assorted Capacitor Classification

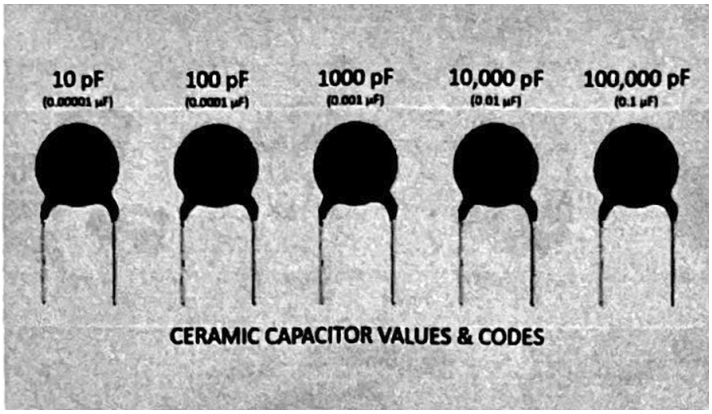


Figure 9: Ceramic Disc Capacitors



Figure 10: Polarized Electrolytic Capacitor

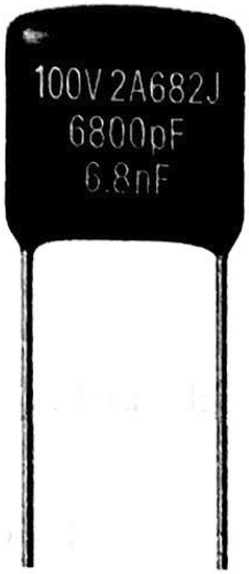


Figure 11: Film Capacitor

Inductors

Inductors store energy inside a magnetic field established by current flowing through a wound coil. Voltage induced across an inductor follows

$$V = L\frac{di}{dt},$$

where L denotes inductance in Henrys. Magnetic core selection (air, iron, or ferrite) dictates current capacity and high-frequency core loss characteristics.

Diodes

A semiconductor diode permits unidirectional current flow. Silicon P-N junction diodes exhibit a forward bias voltage drop around 0.7 V. Zener diodes function safely within reverse breakdown to maintain steady reference voltages. Light Emitting Diodes (LEDs) emit light under forward bias and require series current-limiting resistors to protect against overcurrent destruction.

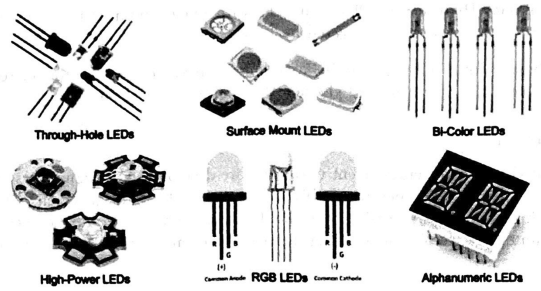


Figure 12: Light Emitting Diode (LED) Structure and Pinout

Transistors

Transistors operate as active control devices for signal amplification and switching. Bipolar Junction Transistors (BJTs) use small base current inputs to regulate larger collector-emitter currents ($I_C = \beta I_B$). Field-Effect Transistors (MOSFETs) provide voltage-controlled switching with near-zero gate current draw.

Digital Logic Gate ICs

Digital logic circuits process binary signals represented by discrete voltage bands (Logic 1 $\approx 5\,\text{V}$, Logic 0 $\approx 0\,\text{V}$). Standard 7400-series TTL ICs house multiple logic gates within integrated dual in-line packages.

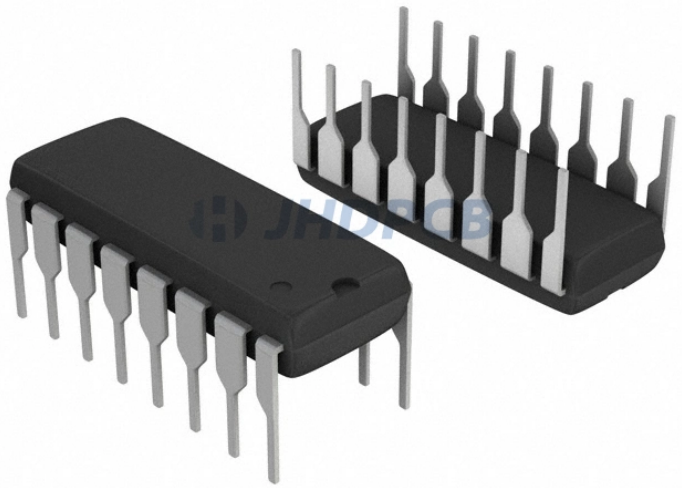


Figure 13: Dual In-Line Package (DIP) IC Outline

Table 2: Common 2-Input Logic Gate ICs and Truth Tables

IC	**Gate**	**Output Y for inputs A, B**			
		00	**01**	**10**	**11**
7408	AND	0	0	0	1
7432	OR	0	1	1	1
7400	NAND	1	1	1	0
7402	NOR	1	0	0	0
7486	XOR	0	1	1	0

Breadboard

Solderless breadboards facilitate temporary circuit assembly. Outer power rails supply common supply voltages and ground, while interior five-hole terminal strips host component connections. A central divider trench splits opposing sides to mount Dual In-line Package (DIP) ICs securely.

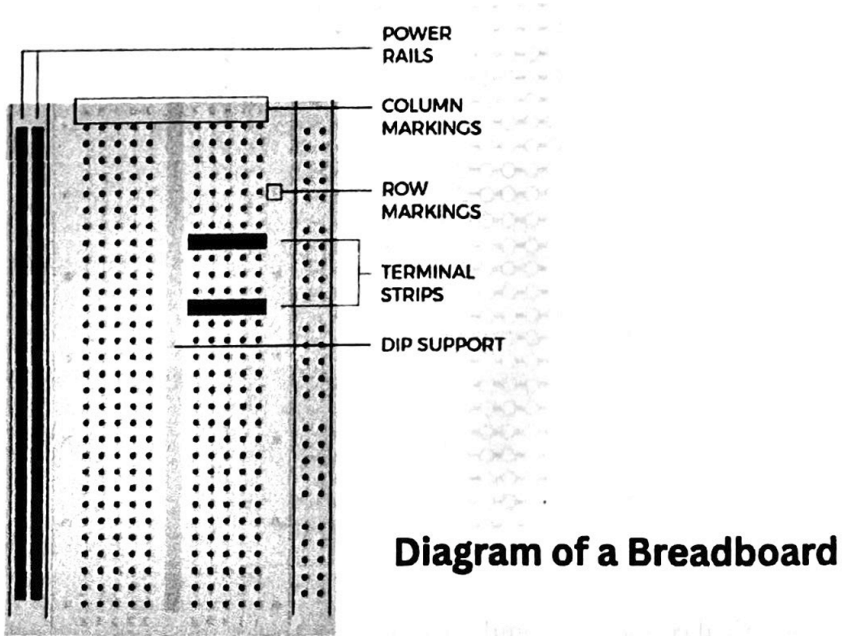


Figure 14: Solderless Breadboard Internal Connection Tracks

Apparatus and Components

Table 3: List of Equipment and Components Used

Item Description	Specification / Rating	Quantity
Digital Multimeter (DMM)	Auto-ranging	1
Solderless Breadboard	Standard Tie-Point	1
DC Power Supply	5 V regulated	1
Fixed Resistors	1.0 kΩ, 47 kΩ, 220 kΩ, 680 Ω	1 each
Current-Limiting Resistor	220 Ω, 0.25 W	1
Electrolytic & Ceramic Capacitors	Assorted values	2
Axial Inductor	10 µH	1
Signal Diode	1N4007	1
Light Emitting Diode (LED)	5 mm, Red	1
NPN Transistor	BC547	1
Logic IC	74HC08 (Quad 2-Input AND Gate)	1
Connecting Wires	Jumper Wires	As required

Circuit Diagram

Experimental Procedure

1. **Resistor Identification:** Determine nominal resistance values using color code bands and cross-check each resistor against DMM resistance measurements.

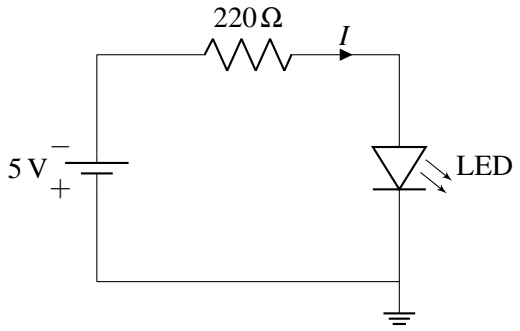


Figure 15: Simple LED test circuit assembled on breadboard with series current-limiting protection.

2. **Semiconductor Inspection:** Examine polarities on capacitors, the cathode line on the 1N4007 diode, and pin arrangements on the BC547 transistor.
3. **Breadboard LED Circuit Assembly:** Construct the LED circuit from Figure 15 on the breadboard. Connect power rails to a 5 V DC supply and verify LED illumination.
4. **Logic Gate Verification:** Position the 74HC08 IC across the breadboard's central trench. Connect V_{CC} (Pin 14) and GND (Pin 7) to power rails, apply all four binary input states across Pins 1 and 2, and record output voltages at Pin 3 using the DMM.

Observations

Because this laboratory session focused on component familiarization and practical verification, signed data sheets were not generated. Qualitative observations are outlined below:

- Four test resistors were decoded using color bands and confirmed via DMM measurements within standard tolerance limits.
- Polarity markings on electrolytic capacitors, diode cathode bands, and transistor pin layouts matched datasheet specifications.
- The breadboard LED circuit functioned correctly upon powering up, confirming proper breadboard bus connectivity.
- Output logic states verified across the 74HC08 AND gate IC matched expected truth table values in Table 2.

Table 4: Resistor Color Code Reference

Resistor	Band 1	Band 2	Band 3	Nominal R
R_1	Brown	Black	Red	1000 Ω
R_2	Yellow	Violet	Orange	47 000 Ω
R_3	Red	Red	Yellow	220 000 Ω
R_4	Blue	Gray	Brown	680 Ω

Discussion

Key practical takeaways include: (i) color-code values reflect nominal ratings, so DMM measurements are necessary to confirm true values before circuit assembly; (ii) reverse-biasing polarized components leads to component damage or circuit failure; and (iii) understanding breadboard internal strip connectivity prevents unexpected short circuits during breadboard prototyping.

Conclusion

This exercise provided hands-on familiarization with basic passive and active electronic components, digital logic ICs, and solderless breadboards. Color-code identification was confirmed with DMM measurements, and the operation of an LED indicator and 74HC08 AND gate was verified on the breadboard.

References

1. Boylestad, R. L., & Nashelsky, L. (2013). *Electronic Devices and Circuit Theory* (11th ed.). Pearson.
2. Alexander, C. K., & Sadiku, M. N. O. (2016). *Fundamentals of Electric Circuits* (6th ed.). McGraw-Hill Education.
3. Boylestad, R. L. (2015). *Introductory Circuit Analysis* (13th ed.). Pearson.