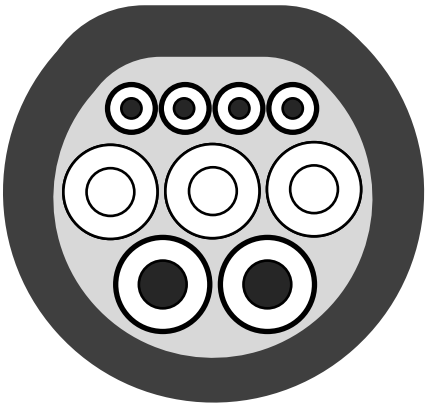
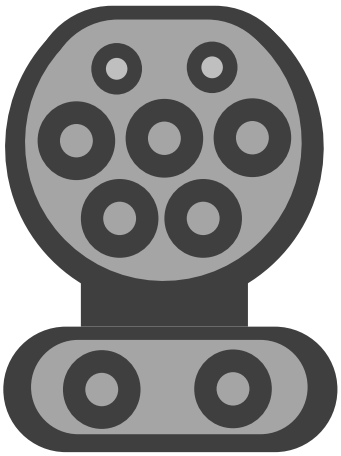
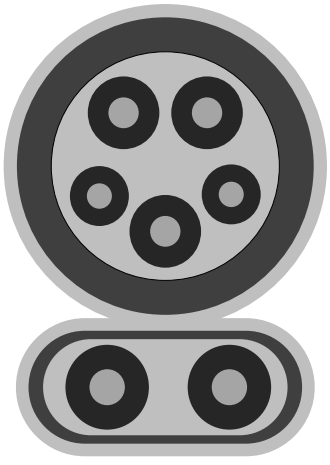
WEEK 1: ASSIGNMENT 1

1. For the table below





Name	Vehicle Inlet Connector
I. CCS1	a. 
II. CCS2	b. 
III. Type-7	c. 

What will be the correct identification of the vehicle inlet connector

A. I-b, II-c, III-a
B. I-a, II-b, III-c
C. I-c, II-b, III-a
D. I-a, II-c, III-b

Answer: C

2. Which of the following vehicle inlet connector shown in the table below, supports 3-phase AC charging

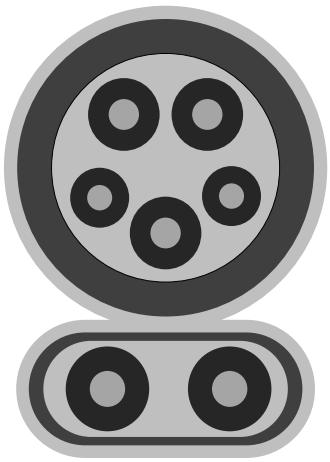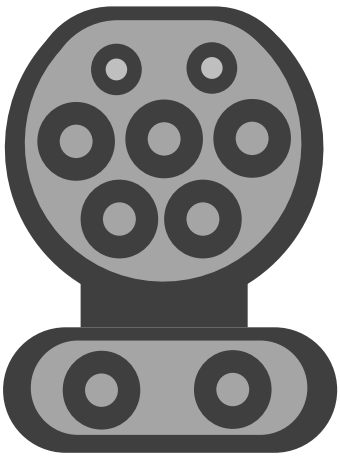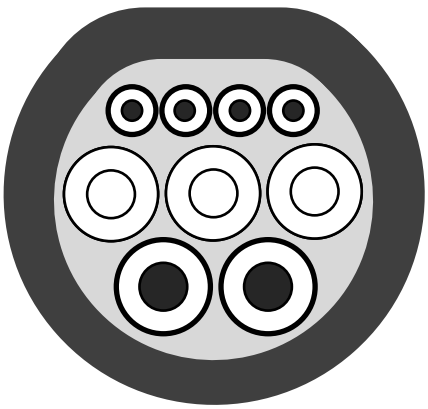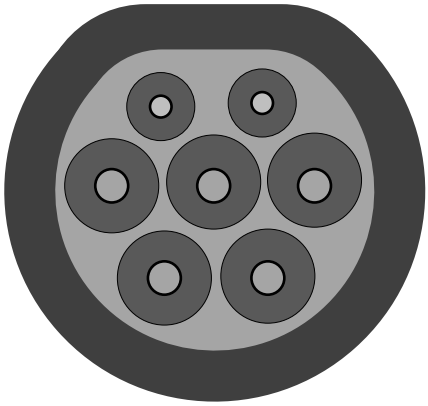I. 	II. 
III. 	IV. 

A. I
B. II
C. III
D. IV

Answer: B, D

3. Which of the following charging system uses CAN communication method
A. CHAdeMO
B. AC Type-2
C. Type-7
D. CCS2

Answer: A, C

4. The charging system which get input directly from home socket with protection is classified as
A. Mode-1 charging system
B. Mode-2 charging system
C. Mode-3 charging system
D. Mode-4 charging system

Answer: B


5. Which of the following component is/are present inside the DC EVSE
A. Rectifier
B. DC-DC coverter
C. BMS
D. Safety interlocks

Answer: A, B, D

6. Which of the following component is/are present inside the AC EVSE
A. Rectifier
B. DC-DC coverter
C. BMS
D. Safety interlocks


Answer: D

7. For the circuit shown below, What will be the average output voltage. If it is supplied from 220V, 60Hz supply. (Note: The answer should be rounded up to 2 decimal places; use $\pi = 3.14$; use values as provided in the figure.)

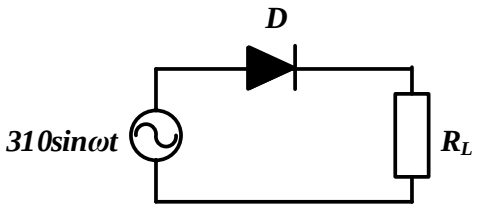

Answer: 98.00 to 99.00

8. For the circuit shown below, what will be the peak repetitive reverse voltage of diode D.

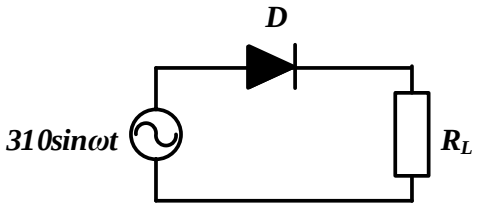

A. 155
B. 310
C. 219
D. 620


Answer: B

9. The communication between EVSE and EV in AC Type-2 is taken place using following protocols

A. ISO15118
B. DIN SPEC 70121
C. OCPP
D. SAE J1772

Answer: D

10. Identify the connector shown below



A. BEVC DC001
B. Type-6
C. CHAdeMO
D. DC GB/T

Answer: C

Answer Key:

1. C	2. B, D
3. A, C	4. B
5. A, B, D	6. D
7. 98.00 to 99.00	8. B
9. D	10. C