

# Master Thesis

Niklas Lundberg, [inaule-6@student.ltu.se](mailto:inaule-6@student.ltu.se)

August 23, 2021



# 1 Abstract

TODO

# Contents

<b>1</b>	<b>Abstract</b>	<b>2</b>
	<b>Glossary</b>	<b>6</b>
	<b>Acronyms</b>	<b>6</b>
<b>2</b>	<b>Introduction</b>	<b>8</b>
2.1	Background . . . . .	9
2.2	Motivation . . . . .	9
2.3	Problem definition . . . . .	11
2.4	Delimitations . . . . .	12
2.5	Thesis structure . . . . .	14
<b>3</b>	<b>Related work</b>	<b>15</b>
<b>4</b>	<b>Theory</b>	<b>16</b>
4.1	Registers and Memory . . . . .	16
4.1.1	Call Stack . . . . .	16
4.1.2	Stack Frame/Call Frame . . . . .	17
4.2	Debugging . . . . .	18
4.2.1	Debugger . . . . .	18
4.3	DWARF . . . . .	19
4.3.1	Dwarf Sections . . . . .	19
4.3.1.1	<i>.debug_abbrev</i> . . . . .	21
4.3.1.2	<i>.debug_aranges</i> . . . . .	21
4.3.1.3	<i>.debug_frame</i> . . . . .	21
4.3.1.4	<i>.debug_info</i> . . . . .	21
4.3.1.5	<i>.debug_line</i> . . . . .	22
4.3.1.6	<i>.debug_loc</i> . . . . .	22
4.3.1.7	<i>.debug_macinfo</i> . . . . .	22
4.3.1.8	<i>.debug_pubnames</i> and <i>.debug_pubtypes</i> . . . . .	23
4.3.1.9	<i>.debug_ranges</i> . . . . .	23
4.3.1.10	<i>.debug_str</i> . . . . .	23
4.3.1.11	<i>.debug_type</i> . . . . .	23

4.3.2	Dwarf Compilation Unit . . . . .	24
4.3.3	Dwarf Debugging Information Entry . . . . .	24
4.3.4	Dwarf Attribute . . . . .	26
4.3.5	Evaluate Variable . . . . .	26
4.3.5.1	Finding Raw Value Location . . . . .	27
4.3.5.2	Parsing the Raw Value . . . . .	28
4.3.6	Virtually Unwind Call Stack . . . . .	29
<b>5</b>	<b>Implementation</b>	<b>33</b>
5.1	Debug Library . . . . .	33
5.1.1	Finding Source Location . . . . .	35
5.1.2	Accessing Memory And Registers . . . . .	35
5.1.3	Evaluating Variables . . . . .	36
5.1.4	Evaluating Call Stack . . . . .	36
5.1.5	Finding Breakpoint Location . . . . .	37
5.2	Debugger . . . . .	37
5.2.1	The Debug Thread . . . . .	38
5.2.2	Simultaneous Handling Of Request And Events	39
5.2.3	Optimization Of Repeated Variable Evaluation	40
5.2.4	Command Line Interface . . . . .	40
5.2.5	Debug Adapter . . . . .	41
5.2.5.1	Initial DAP Messages . . . . .	42
5.2.5.2	Translating DAP Messages To Internal Messages . . . . .	43
5.2.5.3	Simultaneous Handling Of DAP Messages And Events . . . . .	43
5.3	VSCode Extension . . . . .	43
<b>6</b>	<b>Evaluation</b>	<b>44</b>
6.1	Compiler settings comparison . . . . .	44
6.2	Debugger Comparison . . . . .	46
<b>7</b>	<b>Discussion</b>	<b>50</b>
7.1	Debug Information Generation . . . . .	50
7.2	Debug Experience For Optimized Rust Code . . . . .	50

7.2.1	Debugging Rust Code On Embedded Systems	51
7.2.2	Contributing to the Rust Debug Community	51
<b>8</b>	<b>Conclusions and future work</b>	<b>52</b>
8.1	Future Debugging Improvement . . . . .	52
8.2	Future Debugger Improvement . . . . .	53
8.3	Future Debugger Library Improvement . . . . .	53

## Glossary

. 15, 20, 23, 24

**GDB** The GNU Project Debugger. 7, 8, 29–31

**LLDB** A debugger made using libraries from the LLVM project. 7, 30, 31

**LLVM** The LLVM Project is a collection of modular and reusable compiler and toolchain technologies.. 7, 28, 29

**rustc** The name of the *rust* compiler is rustc.. 6, 7, 28, 29

**Tree** A tree is a data structure that consist of nodes with children. The first node is called root and the tree cannot have any circular paths.. 13, 14

## Acronyms

**CFA** Canonical Frame Address. 17–19

**CIE** Common Information Entry. 13, 18, 19

**CLI** Command Line Interface. 20

**DAP** Debug Adepter Protocol. 8, 20, 23, 25–27

**DIE** Debugging Information Entry. 12–17

**DWARF** Debugging with Attributed Record Formats. 7, 8, 11–23, 28–30

**ELF** Executable and Linkable Format. 14, 20, 21, 23

**FDE** Frame Description Entry. 13, 18, 19

**GUI** Graphical User Interface. 8, 26

**PC** Program Counter. 8, 10, 17

**TCP** Transmission Control Protocol. 20, 25, 26

## 2 Introduction

Ever since the first programming language was made debugging has been a key part of the programming process. Debugging is the process of finding and resolving errors, flaws or faults in computer programs. These errors, flaws or faults are also commonly referred to as bugs in the field of computer science. Debugging has become more difficult to do over the years because of the increasing complexity of computer programs and the hardware that they run on. Thus the importance of better debugging tools have become more important to make the process of debugging easier and more time efficient.

One of the first types of debugging tools made and one of the most useful is called a debugger. A debugger is a program that most often allows the developer to control the debugged program in some ways, for example stopping, starting and resetting it. It is also able to inspect the debugged program by displaying the values of the variables in the debug program. Debuggers are a very useful tool for debugging but it is also a very useful tool for testing, because it enables the developer to see the result of each line of code.

Debugging today works by having the compilers generate debug information when compiling the program. The debug information is then stored in a file in a special file format designed to be read by a debugger. One of the most popular of these file formats is the format Debugging with Attributed Record Formats (DWARF). It is a complex format that is explained in detail in section ???. The debug information stored in the file can be used to find the location of variables, in most cases the value of variables are stored on the memory on the call stack. A stack is a data structure for storing information and is usually used to store all the variables for each function that is currently being executed. Thus a debugger can use the debug information to find the location of a variable and then evaluate the value of it, which is then displayed to the user of the debugger.

The main problem with debugging optimized code is that variables are not stored on the call stack that is in the memory. Instead they are temporarily stored in registers that are faster to access but



cannot hold as much information as the memory. This reduces the amount of memory needed and makes the program run faster. It also makes debugging a lot harder because the variables are only present in the register for a very short time and thus the debugger will often not have access to that value. Then there is the problem of the debugger not being able to utilize all the available debug information.

## 2.1 Background

## 2.2 Motivation

The main motivation is that optimized *Rust* code can be 10 – 100 times faster than unoptimized code [Net+]. That is a very large difference in speed compared to other compilers like *Clang* for example, where the optimized code is about 1-3 times faster than the unoptimized code [RD]. Thus for languages like *C* it is much more acceptable to not be able to debug optimized code because the difference isn't that large compared to *Rust*. But in the case of *Rust* the difference is so large that some programs are too slow to run without optimization. This causes the problem that the code cannot be debugged because debuggers don't work well on optimized code and unoptimized code is too slow to run. Because of that there is a need for debuggers that can give enough information to debug optimized *Rust* code.

Another large motivation for this thesis is that the most common way of debugging *Rust* code on embedded systems is complicated for a beginner. One of the reasons being that it requires two programs being *openocd* and *gdb*, it also requires configuration files which takes some time to understand and configure. This is not very accessible for people that have no experience with these programs and is unnecessarily complicated. The ideal solution for accessibility would be to have a single program instead of two and that it requires less configuring, thus making it as easy as possible for a new person to debug their code.

Most of the debuggers used for *Rust* code are written in other

programming languages and there isn't a lot of debugging tools written in *Rust* yet. Thus one of the motivation for the thesis debugger to be written in *Rust* is to contribute with a example of a debugger written in *Rust* to the *Rust* community. This also relates back to improving debugging for optimized *Rust* code because that is a large and hard problem that requires a lot of work to solve and to maintain the solution. One of the most realistic way that will happen is if the *Rust* community around debugging grows and more people contribute with there solutions and ideas.

Another way this thesis contributes to the *Rust* community is by making a library that simplifies the process of retrieving information from the debug information. This is important because it makes retrieving debug information simpler for new developers to start contributing to the *Rust* debug community. Which will hopefully lead to more work being done on the compiler to improve the debugging situation for unoptimized and optimized *Rust* code.

There is also a economical reason wanting to have debuggers that work well for optimized code. As mentioned before testing all the paths in a program is sometimes not feasible because of the amount of work needed. But verifying that the program is correct and that the implementation is correct is another way to ensure that the program works as intended. It is even sometimes the preferred solution because then the program is proven to work correctly. And a debugger is one of the vital tools needed for confirming that a implementation is correct. Verifying the correctness of a program and the implementation can also be cheaper then testing in those cases where the programs has extremely many paths. Thus improving the tools needed to verify the correctness of the implementation can intern reduce the cost of verifying that the program works as intended. And it can even reduce the amount of money witch companies spend on testing there code.

## 2.3 Problem definition

There are two main problem that this thesis tries to tackle to improve the experience of debugging optimized code for embedded systems. The first problem is about the generation of the debug information, if more debug information can be generated then there is more information the debugger can retrieve and show the user. This is also where the problem starts with debugging optimized code, because debuggers need the debug information to understand the relation between the source code and the machine code. Thus it is very important that the compiler generates as much debug information as possible, because there is nothing that can be done later to get more information. The first problem then is to look at the different options that can be set for the `rustc` compiler to improve the generation of debug information without impacting the optimization of the code too much. Speed of the resulting code is still a big priority because the unoptimized *Rust* code is very slow compared to the other languages.

The second problem is looking at the available debug information that the `rustc` compiler generates for optimized code and creating a debugger that utilizes that information to the fullest. This problem has two parts to it, the first being retrieving the needed information from the debug information. This will be the hardest part and is the most important for improving the debugging for optimized code. The second part is to display the debug information to the user in a user friendly way.

The goal of solving these two problems is to create a debugger that gives a better debugging experience for optimized *Rust* code on embedded systems than some of the most commonly used debuggers, such as GDB and LLDB. And to inspire further development for debugging tools in the *Rust* community.

## 2.4 Delimitations

As mentioned in sections 2.3 one of the main problems for getting a debugger to work for optimized code is getting the compiler to generate all the debug information needed. In the case of the *Rust* compiler it is the LLVM library that handles the debug information generation. LLVM is a very large project that many people are working on and thus it would be too much work for this thesis to try and improve the debug information generation. Thus this thesis is limited in solving this problem by using existing configurations for *rustc* and LLVM.

The compiler backend LLVM that the *rustc* uses supports two debugging file formats that hold all the debug information. One of them is the format DWARF that is worked on by many individuals from different companies. The other one is *CodeView* format which is developed by *Microsoft* [Teac]. To make a debugger that supports both formats would be a lot of extra work that doesn't contribute to solving the main problem of this thesis. Thus it has been decided to only support the DWARF format because it has very descriptive specification and a open source community around it.

The scope of this thesis also does not include changing or adding to the DWARF format standard. The main reason is that it takes years for a new version of the standard to be released and thus there is not enough time for this thesis to see and realize that change or addition. Another reason is that even if a new version of the DWARF format could be released in the span of this thesis, it would take years before the *Rust* compiler had been updated to use the new standard. Currently the newest DWARF version is 5 but the *Rust* compiler still uses the DWARF 4 format.

Many of the debuggers today have a lot of functionality to help the user understand what is happening in the program that they are debugging. An example of these functionalities are debuggers that support the ability to go backwards in the program. Functionalities like this are useful but do not contribute much to the main problem of this thesis which is debugging optimized code. So to keep

this thesis focused on the main problem the feature the debugger will have is restricted to virtually unwinding the stack, evaluating stack frames and there variables and lastly the ability to add and remove breakpoints. The debugger will also have the ability to control the program by stopping, continuing and stepping an instruction which are important debugger functionalities that doesn't require debug information.

When debugging code on embedded systems the debugger needs to know a lot about the hardware the code is running on. It has to know the size of the memory and the number of registers, it also has to know which are the special registers such as the Program Counter (PC) register and more. There is also the endianness of the values store on in memory and registers so the debugger can convert it to the correct type. Then there is also the type of machine code the processes uses and the instruction mode use. To support all the different micro controller would be to much work for this thesis. Thus the debugger is limited to work with the *Nucleo-64 STM32F401* card because it is the one that was available. And it will only support the instruction set *Thumb mode* made by *arm*. The debugger will be design to work with other similar micro controller but to test and grantee that it will work with them is to much work for this thesis.

Another part of this thesis is the interaction between the user and the debugger. Existing debugger like GDB both have a *CLI* and a Graphical User Interface (GUI), thus it is up to the user which one they want to use. From a usability perspective the debugger in this thesis should also have both of the option for the user to choose from. A *CLI* is not that much work to implement but a GUI takes a lot of work to implement. Luckily *Microsoft* has made a protocol for debuggers that specifies an adapter that handles the communication between the GUI and the debugger. This protocol is called Debug Aapter Protocol (DAP)[Mic] and is used by *VSCode*. Thus the scope of the debugger will include implementing the DAP protocol and a simple extension for *VSCode*.

The DWARF format is very extensive and supports a lot of differ-

ent program languages, the specifications for the different languages are a little different from each other. Because this thesis is about *Rust* code the thesis will only go into detail in how to read the DWARF format for *Rust*. The specification for the DWARF format is also very good at explaining how the information is structured. Thus a this thesis will not go into all the detail in how to read the DWARF format instead it will focus on explaining how the information in the DWARF format can be used in combination to get important information that the user wants.

## **2.5 Thesis structure**

TODO

### **3 Related work**

TODO

## 4 Theory

### 4.1 Registers and Memory

The values of a program needs to be temporary stored some were on the computer were it can easily be access while running the program. The two ways the computer can do this is to either store it in a register or in the memory. Registers are very limited in space and are very volatile thus it is good for storing values that are needed often in a short amount of time. Memory is slower but has a lot more space and is thus much more useful for storing values that will be needed in a while. The compiler will compile the program to store the different variables and values in the registers and memory in a structured way so it is easily managed.

There is no real structure for the registers except that certain registers have a specific purpose, which can be the PC for example. A PC is a register that keeps track of which machine code instruction the program is currently at. There are other important registers like the stack pointer register and more. On the other hand the memory all structure and one of the structures is a stack that consist of stack frames/call frames, the stack is called *call stack*.

#### 4.1.1 Call Stack

The Call stack is a stack in the memory that holds stack frames which intern contain information about the values of variables and other values. A stack is a data structure that consist of a number of elements that are stacked on top of each other and the only two operations available for a stack is push and pop. The push operations adds a new element on top of the stack and the pop operation removes the top element of the stack. Other key characteristics are that it is only the top element that can be access thus too reach the lower elements all the above elements needs to be popped. The call stack is used to keep track of all the stack frames which holds almost all the values of the running program, the values are also present in



the registers and in the heap which is also located in the memory. An example of a call stack can be seen in the figure 1.

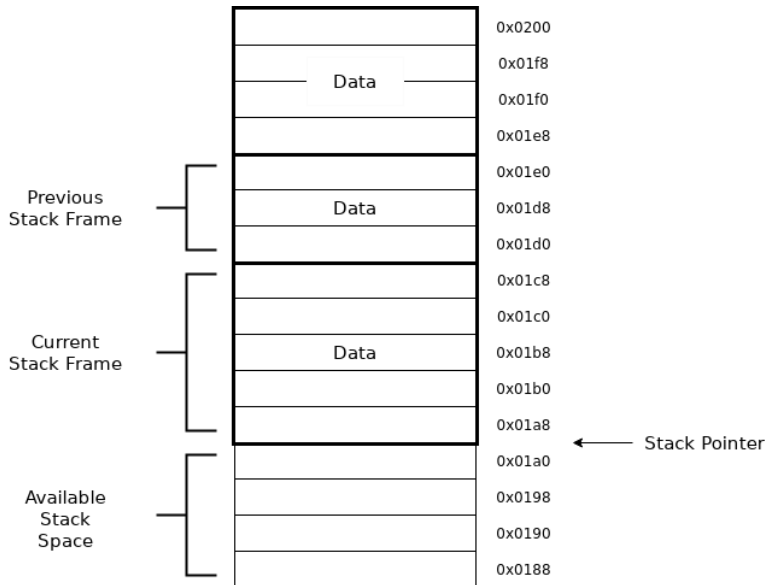


Figure 1: An visual example of how a stack and stack frames can look.

#### 4.1.2 Stack Frame/Call Frame

A stack frame or call frame is a element of the call stack that contain variable values for a scope of the running program. The scope is usually a function that has been called that have its own arguments and variables that are needed to be stored in memory for later use. Stack frames also contain a return address which is pointer to the machine code that the program should jump to after the computation in the current scope is done. When the computation is done

the stack frame will be popped from the call stack and the previous stack frame will become the current stack frame, check out figure 1 for an visual example.

## **4.2 Debugging**

Debugging refers to the process of finding and resolving errors, flaws, or faults in computer programs. In computer science an error, flaw or fault is often referred to as a software bug or just bug. Bugs are the cause for software behaving in a unexpected way which leads to incorrect or unexpected results. Most bugs arise from badly written code, lack of communication between the developers and lack of knowledge.

There are multiple ways to debug computer programs. One of the ways is testing, were some input is sent into the code and then the result is compared to the expected result that is known before hand. The amount of code being tested in a test can wary from just one function to the whole program. Another way of debugging is to do a control flow analysis to see which order the instructions, statements or function calls are done in. There are a lot more ways to debug computer programs but there is one that is most relevant to this thesis. This last debugging technique requires a computer program called a debugger that can inspect what is happening in the program being debugged, it can also control the execution of the debugged program.

### **4.2.1 Debugger**

A debugger is a computer program that is used for testing and debugging other computer programs. The program that is being debugged is often referred to as the target program or just the target. The two main functionalities of a debugger is firstly the ability to control the execution of the target program. Secondly it is to translate the state of the target program into something that is more easily understandable.

Some of the most common ways a debugger can control a target program is starting, stopping, stepping and resetting it. Starting or continuing means to continue the execution of the target program. Stopping the target program can often be done in two ways, the first is just to stop it where it is, the other way is to set a breakpoint. A breakpoint is a point in the code that if reached will stop the target program on that same point. Stepping is the process of continuing the execution of the target program for only one instruction or source code line. Lastly resetting means that the target program will start execution from the start of the program.

Most debugger display the state of the target program relative to the source code. This means that if the target program has stopped, most debugger will translate the location in the machine code it stopped on into location of the source instruction the machine code instruction was generated from. They also often let the user set the breakpoint in the source code and translate that to the closest machine code instruction. Other features debuggers have is the ability to virtually unwind the call stack, evaluate variables values and to evaluate expression. There are a lot more functionalities that debugger can have but these are the most common and used.

## 4.3 DWARF

The DWARF format is very complex which makes it hard to understand. This section will go through how the format is structured and how the different parts can be used to get debug information. But it will not go through every detail about the DWARF format, because the DWARF format has a great specification that goes into detail how it is structured and work. Thus to read more about DWARF checkout the specification [Com10].

### 4.3.1 Dwarf Sections

The DWARF format is divided into sections in the object file which all contain specific information, these sections use offsets to point to

information in other section, see figure 2. All of the sections are not in every version of DWARF and are sometimes changed from version to version. Thus the following explanations are specific for DWARF version 4 but can sometimes also apply for other versions, checkout Appendix F in [Com10] for more information on the changes done from older versions.

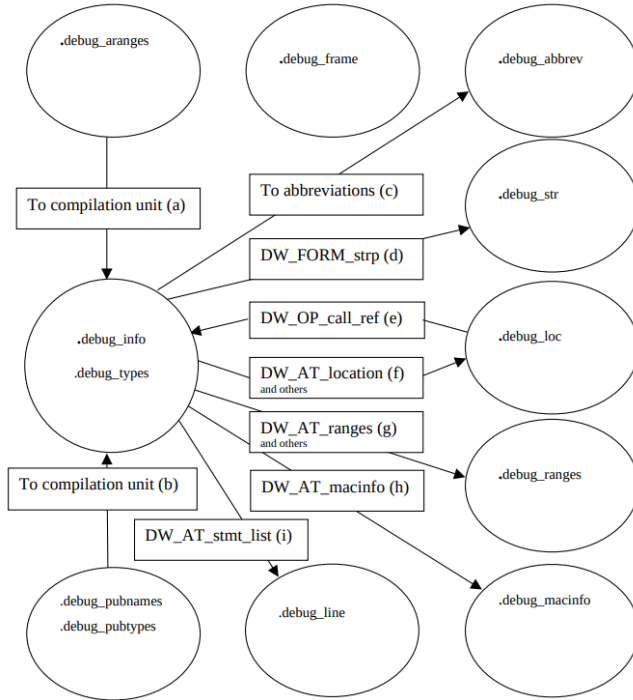


Figure 2: Diagram of all the different DWARF sections and there relations to each other. This diagram is taken directly from the DWARF spesification [Com10].

#### 4.3.1.1 *.debug\_abbrev*

The DWARF section *.debug\_abbrev* contain all of the abbreviation tables which are used to translate a abbreviationnumber into its official DWARF name. These table entries contain translations for Debugging Information Entry (DIE) tags and DIE attribute names. To translate a abbreviationnumber one just has to go thorough the entries in the table and find the one with the same abbreviationnumber. Checkout section 7.5.3 in [Com10] to learn more.

#### 4.3.1.2 *.debug\_aranges*

The DWARF section *.debug\_aranges* is used to lookup which machine address corresponds to which compilations unit. This address information is stored in ranges where a compilation unit can have multiple ranges. These ranges consists of a start address followed by length. Thus to lookup the user only needs to check if the search address is between the start address and the start address plus the length. To read more about this section checkout section 6.1.2 in [Com10].

#### 4.3.1.3 *.debug\_frame*

In the DWARF section *.debug\_frame* the information needed to virtually unwind the call stack is kept. This section is completely self-contained and is made up of two structures called Common Information Entry (CIE) and Frame Description Entry (FDE). Virtually unwinding the call stack is complex, thus to learn more about that cheackout section 4.3.6 and section 6.4.1 in [Com10]

#### 4.3.1.4 *.debug\_info*

Information about the source code are store in DIEs which are low-level representation of the source code. These have a tag that describes what it represents, an example tag is *DW\_TAG\_variable* which means that the DIE represents a variable from the source

code. All DIEs are stored in Tree structure that represents a compilation unit or a partial one. These Tree structures are structure like the source program and makes it possible to relate the source code to the machine code. The section *.debug\_info* contains a number of units that all have one of these DIE Trees and some other debug information. This is one of the most important sections in DWARF because it is used to understand the relation ship between the source code and the machine code.

#### **4.3.1.5 *.debug\_line***

The DWARF section *.debug\_line* holds the needed information to find the machine addresses that is generated from a certain line and column in the source file. It is also used to store the source directory, file name, line number and column. Then the DIEs will store pointers to the source location information in the section *.debug\_line* enabling the debugger to know the source location of a DIE. The section 6.2 in [Com10] explains in more detail how this information is stored in the *.debug\_line* section.

#### **4.3.1.6 *.debug\_loc***

The location of the variables values are stored in location lists, each entry in the list holds a number of operation that can be used to calculate the location of the value. All of the location lists are stored in the section *.debug\_loc* and are pointed to by DIEs in the *.debug\_info* section. These offsets are most commonly found in the attribute *DW\_AT\_location* which is often present in DIEs representing variables. The relation between these sections can be seen in the figure 2.

#### **4.3.1.7 *.debug\_macro***

In the section *.debug\_macro* the macro information is stored, it is stored in entries that each represents the macro after it has been expanded by the compiler. These entries are also pointer to by DIEs in the *.debug\_info* section and those pointers can be found in

the attribute *DW\_AT\_macinfo*. This section is a little bit complex thus to learn more about it read section 6.3 in [Com10].

#### **4.3.1.8 *.debug\_pubnames* and *.debug\_pubtypes***

There are two sections for looking up compilation units by name. The first one is *.debug\_pubnames* which is for finding functions and objects. And the other one is for finding types, this section is called *.debug\_pubtypes*. Both of these are ment to be used for fast lookup of what unit the search DIE is located in. Checkout section 6.1.1 in [Com10] for more information.

#### **4.3.1.9 *.debug\_ranges***

DIEs that have a set of addresses that are non-contiguous will have offset in to the section *.debug\_ranges* instead of having a address range. This offset points to the start of a range list that contain range entries which are used to know for which addresses the DIE is used in the program. The DWARF section *.debug\_ranges* is used for storing these list of ranges. Checkout section 2.17 in [Com10] to learn more about code addresses and ranges.

#### **4.3.1.10 *.debug\_str***

The DWARF section *.debug\_str* is used for storing all the strings that is in the debug information. An example of these strings are the names of the functions and variables, these string are found using the offset in the attribute *DW\_AT\_name*. The attribute is found in the function and variable DIEs and the offset is in the form of *DW\_FROM\_strp*.

#### **4.3.1.11 *.debug\_type***

The DWARF section *.debug\_type* is very similar to section *.debug\_info* in that it is also made up of units with each a Tree of DIEs. The difference is that the DIEs are a low-level representation of the types in the source code instead of a representation of the source program.

### 4.3.2 Dwarf Compilation Unit

The compiler when compiling a source program will most often generate one compilation unit for each source file, there are some cases when multiple partial compilation units will be generated instead. These compilation units holds most of the debug information generated from the source file. This naturally creates that the debug information in most of the different DWARF sections are divided into these compilation units. It also makes it easy for the debugger to find information because the debug information is structured similar to the source code. The main use of these compilation units in a debugger is to first find which unit the program is currently in. Then it is easy to search through the DIE Tree in the *.debug\_info* section to find the information needed. Finding the right compilation unit can take time but there is the DWARF sections *.debug\_aranges*, *.debug\_pubnames* and *.debug\_pubtypes* that provides a fast way of finding it.

The first DIE in the Tree from the section *.debug\_info* will have the tag *DW\_TAG\_compile\_unit*. This DIE has a lot of useful debug information about the source file, one being the compiler used and the version of it. It also says which programming language the source file is written in and directory and path of the source file. The Tree is structured in a way that the children of a DIE representing a function will all be declared inside of the function in the source file. Thus it is easy for the debugger to know everything about the function by going through all of its children.

### 4.3.3 Dwarf Debugging Information Entry

One of the most important data structures in the DWARF format is the DIE which are found in the *.debug\_info* and *.debug\_type* sections. These DIEs are used to represent parts of the source code and hold information about where in the source code there are declared. They also contain information about which range of addresses they are applicable to in the machine code and more. There are two types



of DIEs, one of them are dies that only describe types in the source code and are located in a Tree in the section *.debug\_types*. The other type of DIE are dies that describe the structure of the source code and describes where that information is in the machine code.

Let look at an example of a DIE that describes a variable, the example can be seen in figure 3 which is a screen shoot of the output from the program *objdump* run on a Executable and Linkable Format (ELF) file. The first line in the figure begins with a number 8 which represents the depth in the tree this DIE is located, the next number is the offset into this section for that line. Lastly the information stored on that line is a 9 which represents the tag of the DIE which is in this case *DW\_AT\_variable*. This first line is also the first line of the die. For the rest of the line the first number is also the offset into the *.debug\_info* section that the information is located and these lines are attributes to in the DIE. The attribute *DW\_AT\_location* has the information of where the variable is stored on the debug target. The name attribute *DW\_AT\_name* has an offset into the DWARF section *.debug\_str* that the tool has evaluated to "str" and it is the name of the variable. The attributes *DW\_AT\_decl\_file* and *DW\_AT\_decl\_line* has offset into the section *.debug\_line* and will reveal the source file and line that this DIE comes from. Lastly the attribute *DW\_AT\_type* has a offset into the section *.debug\_types* that points to a type DIE that has the type information for this variable.

```
<8><241>: Abbrev Number: 9 (DW_TAG_variable)
<242>   DW_AT_location      : 2 byte block: 7d 3c      (DW_OP_breg13 (r13): 60)
<245>   DW_AT_name         : (indirect string, offset: 0x40466): ptr
<249>   DW_AT_decl_file    : 1
<24a>   DW_AT_decl_line    : 591
<24c>   DW_AT_type         : <0x1069>
```

Figure 3: An example of a DWARF DIE for a variable *ptr*. This example is the output of the tool *objdump* run on a DWARF file.

#### 4.3.4 Dwarf Attribute

The information in the DIEs are stored in attributes these attributes consists of a attribute name and a value. The name of the attribute is used to know what the value the attribute hold should be used for, it is also used to differentiate the different attributes. All of the attributes names start with *DW\_AT\_* and then some name that describes the attribute, an example is the name attribute *DW\_AT\_name*. In the dwarf file the name of the attributes will be abbreviated to there abbreviation number that can be decoded using the *.debug\_abbrev* section. A die can only have one of each attributes and it thus limited to the number of attributes it can have.

#### 4.3.5 Evaluate Variable

The process of evaluating the value of a variable or argument is a bit complicated because there is a lot of parts to it that all depend on each other. Thus to simplify the explanation a simple example will be used to explain the main part of evaluating a value. Taking a look at the example in figure 4 there is a function/subprogram DIE with the name *my\_function*, it is the DIE with the tag *DW\_TAG\_subprogram*. The example in the figure is the output of the program *objdump* run on an DWARF file and it is shown because it is much easier to read then the raw DWARF file. The function has a argument called *val* which is the DIE with the tag *DW\_TAG\_formal\_parameter* in the figure 4, it is a child of the function DIE which means that it is a argument to the function *my\_function*. It is this argument *val* that will be used as an example for evaluating the value of a variable or argument.

A key thing to note is that the function DIE called *my\_function* has two attribute called *DW\_AT\_low\_pc* and *DW\_AT\_high\_pc* that describe the PC range in which the function applies. This means that the value of the argument *val* will only be in memory when the PC is in the range describe by the two attributes. Thus the value of *val* can only be determined when the PC is in that range. There

is also some other attributes in the example that are not mention here because they are not needed for determining the value of the attribute.

Another important thing to note is that the example explained is a very simple one meaning that there is a lot more different DWARF operation for finding the location of a variable and also a lot more different tags for the type DIEs. All the various tags for type DIEs requires a unique explanation to how it should be used thus the explanation of each one of them can be read about in the DWARF specification [Com10], the same goes for the different DWARF operations.

#### 4.3.5.1 Finding Raw Value Location

Examining the DIE for the argument *val* there is a attribute there called *DW\_AT\_location* this attributes value is a number of operations that when executed will result in the location of the value. In this example the value of the *DW\_AT\_location* attribute is *DW\_OP\_fbreg*  $-2$ , this operation means that the value is stored in memory at the address for it is equal to the *frame base* plus the offset  $-2$ (see [Com10] page 18). *Frame base* is a address in memory that is fixed to the first value in the stack for the functions stack frame(see [Com10] page 56). To get the value of the *frame base* it also has to be evaluated in the same way that the argument *val* will be. The operation for evaluating the *frame base* are located in the attribute *DW\_AT\_frame\_base* in the parent function DIE to the *val* die, it is the one called *my\_function*. Looking at figure 4 at the attribute *DW\_AT\_frame\_base* of the function DIE the operations to evaluating the *frame base* consist only of the operation *DW\_OP\_reg7*. This operation means that the value for the *frame base* is stored in register 7(see [Com10] page 27) thus to continue the evaluation of the argument *val* register 7 has to be read. Continuing evaluation of the argument *val* it is now know were it is located because the operations describe it to be in the memory address equal to  $-2$  plus *frame base*. Thus the value of the argument can then be read from

that memory location but to do that the size first be known and the value then needs to be parsed into the correct type.

```
<2><4321>: Abbrev Number: 16 (DW_TAG_subprogram)
<4322> DW_AT_low_pc      : 0x8000fca
<4326> DW_AT_high_pc     : 0x2c
<432a> DW_AT_frame_base  : 1 byte block: 57 (DW_OP_reg7 (r7))
<432c> DW_AT_linkage_name: (indirect string, offset: 0x473b8): _ZN24nucleo_rtic_blinking_led7my_function17hefe1787a0f0f5f97E
<4330> DW_AT_name         : (indirect string, offset: 0x64a52): my_function
<4334> DW_AT_decl_file    : 1
<4335> DW_AT_decl_line   : 194
<4336> DW_AT_type        : <0x6233>
<3><433a>: Abbrev Number: 17 (DW_TAG_formal_parameter)
<433b> DW_AT_location    : 2 byte block: 91 7e (DW_OP_fbreg: -2)
<433e> DW_AT_name         : (indirect string, offset: 0x11d94): val
<4342> DW_AT_decl_file   : 1
<4343> DW_AT_decl_line  : 194
<4344> DW_AT_type        : <0x6233>
```

Figure 4: An example of a subprogram and parameter DWARF DIE. This example is the output of the program *objdump* run on a DWARF file.

#### 4.3.5.2 Parsing the Raw Value

Now the first problem with parsing the raw value of the argument into the correct type is knowing what type the argument has. Luckily DWARF has a attribute for that called *DW\_AT\_type* which value is a offset into the DWARF section called *.debug.types*. The *val* argument DIE has this attribute and as can be seen in figure 4 it has the value 0x6233 which points to the type DIE seen in figure 5. Note that the type DIE in the figure has the offset 6233 which is the same offset that the *val* DIE has in its type attribute. The type DIE has the tag *DW\_TAG\_base\_type* which means that it a type that is built into the languages and is not defined in terms of other data types(see [Com10] page 75). The DIE also have three attributes the first one is the name attributes which in this case says that the base types name is *i16*, see figure 5. Then there is the attribute *DW\_AT\_encoding* describes how the raw bytes should be interpreted and in this case it has the value 5 that stands for signed. Thus from the encoding attribute it is known that the type of *val* is a signed integer, but the size of the integer is still unknown. The last attribute in the DIE is *DW\_AT\_byte\_size* and it has the value 2 which means that the size of the signed integer is 2 bytes. Now the

location, size and type of *val* is known and thus the value can be evaluated.

```
<1><6233>: Abbrev Number: 34 (DW_TAG_base_type)
<6234>   DW_AT_name       : (indirect string, offset: 0x2a125): i16
<6238>   DW_AT_encoding   : 5      (signed)
<6239>   DW_AT_byte_size  : 2
```

Figure 5: An example of a base type DWARF DIE. This example is the output of the program *objdump* run on a DWARF file.

### 4.3.6 Virtually Unwind Call Stack

To virtually unwind the *call stack* entail the task of restoring the code location and the register values for each *subroutine activation*, it also entail the task of find the location of the corresponding *call frame* on the stack. Each *subroutine activation* has a code location within the subroutine that show where it stopped for any reason, the reason could be that a breakpoint was hit, it was interrupted by an event or it could be location where it made a call. As mention the *subroutine activation* also has some register values at the mention code location that may or may not need to be restored depending on if the activation is the last one or not. Lastly a *subroutine activation* has a corresponding *call frame* on the stack that is identified by the Canonical Frame Address (CFA). The CFA is the value of the stack pointer in the previous stack frame at the call location of the current *stack frame*, one thing to note is that the CFA is not the same value as the stack pointer when entering the current *call frame* (see [Com10] page 126).

Accessing one of the *subroutine activation* requires that the activation stack is virtually unwound to get to the desired activation, there is only one exception to this and that is if the top activation is desired. That is because all of *activation* information location is known thus it is easy to read that information from the registers and memory. It is called *virtually unwinding* because none of the

value in the registers or memory are changes which means that the state of the target is not changed. In general the steps to virtually unwinding the *activation* is to begin with calculating the CFA of the previous *activation*, the code location of the previous *activation* and to virtually restore any registers if needed. Then the same thing can be done to the previous *activation* and so it repeats until the desired *activation* is reached. This process is required to start with the top *activation* because it is the only one that is known at first and the process has to be stopped if the bottom *activation* is reached.

Any subroutine can have some prologue code that is in the beginning of the subroutine and epilogue code that is at the end. The prologue code is used to preserve the values of registers over the duration of the subroutine, this is done by allocating some extra space on the call stack for the *call frame* which is used to store the register values. Then the epilogue code is used to restore these values to the registers before returning to the previous frame. Using this fact the compiler generates debug information that enables a user to virtually restore these preserved registers and that is what is done when virtually unwinding the *activations*. One thing to note is that the prologue and epilogue code are not always continues blocks of code that are in the beginning and end of a subroutine. Instead sometimes the store and read operation are moved into the subroutine. There more of these special cases that the compiler does and some that are hardware specific, to read more about them see [Com10] page 126-127.

The location information for finding CFA and the registers for a *activation* is stored in a table, that consist of virtual unwinding rules and addresses. There are multiple of these tables for each frame that are stored in a data structure called Frame Description Entry (FDE) that is meant to hold all the needed frame information for that frame. Then there is also the data structure Common Information Entry (CIE) that holds information that is shared between some Frame Description Entry's. All of this frame information is stored in a separate section called *.debug\_frame* and each instance of this section is guaranteed to have at least one Common Information Entry.

Going back to the table with the virtual unwinding rules the first column of that table contains the code addresses, they are used to identify that all the virtual unwinding rules on that row applies for a particular code address. Every line of code is meant to have these rules but because many of the rows are exactly the same many of those rows are removed from the table to save storage space. The second column is also special because it contains the virtual unwinding rules for CFA, these rules are either a DWARF expression that needs to be evaluated in the same way that the variables are in section 4.3.5 or a register values plus some signed offset. All the other columns contain virtual unwinding rules for all the register and they are in orders from 0 to  $n$ , see figure 6 for a visual example of the table.

LOC	CFA	R0	R1	...	RN
L0					
L1					
...					
LN					

Figure 6: This is how the table for reconstructing the CFA and registers looks like. *LOC* means that it is the column containing the code locations for 0 to  $N$ . The column with CFA has the virtual unwinding rules for CFA. The rest of the column *R0* to *RN* holds all the virtual unwinding rules for the register 0 to  $N$ .

There are a number of different virtual unwinding rules for the registers that are called register rules in the DWARF specification [Com10], these are listed on page 128. Some of them are very easy to use such as the register rule *undefined* that says that a register is not preserved by the callee and thus is impossible to know the value of. If the register value is unchanged then register rule *same value* is used to denote that. The most common rule is *offset(N)* where  $N$  is a signed offset, this rule means that the register value is stored at

the address  $CFA + N$ . All of the remaining rules can be read about in the DWARF specification [Com10] on page 128.

Now understanding what information is stored about the call frames the call stack can be virtually unwind by first finding the relevant CIE and FDE. Finding the relevant CIE and FDE is done by doing a lookup in the DWARF section *.debug\_frame* using the current machine code location that the program is stopped on. Then the virtual unwinding rules in the table of the FDE can be evaluated to get the value of the CFA and the preserved register. Lastly the code location of the previous frame can be calculated using the return register that is must often one of the preserved registers, this can not always be done because sometimes the information needed is not present. The most common case were the value of the return register is not preserved is when the bottom of the stack is reach, thus the virtual unwinding is complete. This way of virtually unwind a *activation* can then be repeat for all the actiavations in the stack starting from the top *activation* of the stack to the bottom one.

The virtual unwinding rules in the table actually needs to be evaluated from some special DWARF operations. There are a lot of these operation which many are similar to the operation used to evaluate the location of a value in section 4.3.5. Thus there is no real need of explain them here but to learn more about them read section 6.4.2 in the DWARF specification [Com10] on pages 131-136. The way to evaluate these operations is also describe in section 6.4.3 in the DWARF specification [Com10] on pages 136-137 in 4 steps.



## 5 Implementation

The implementations of the debugger is separate into three different smaller projects, the first being a debug library that simplifies the process of retrieving information from the DWARF format. To learn more about how the debug library project is implemented checkout the subsection 5.1. The second project is to create a debugger using the debug library and the last project is to make a debug adapter extension for *VSCode*. The structure of the debugger can be seen in the figure 7, as can be seen in the figure the debugger uses the debug library *rust-debug* to read the ELF file and the probe-rs library for interfacing with the microcontroller being debugged. It can also be noted that the debugger is divided into two separate threads, one for handling the user's input and displaying information. Another one for interacting with the debug target and the ELF file. These are not the only threads but they are the most important ones and to simplify this general overview it can be seen as only two threads. The *Main Thread* is the thread that can either be started as a Command Line Interface (CLI) that handles the user's commands from the command line or as a debug adapter server that handles DAP commands over a Transmission Control Protocol (TCP) connection. The main purpose of this thread is to handle input from the user and to display or forward information from the *Debug Thread*. The purpose of the debug thread is to handle requests from the *Main Thread* and then send back a response, it also checks the state of the debug target and sends events to the *Main Thread* if the state of the debug target changes. These two threads communicate using an asynchronous channel that both sides poll to check for any new messages.

### 5.1 Debug Library

Retrieving the debug information from the DWARF sections in the ELF file is one of the main problems that needs to be solved when creating a debugger. The DWARF format is made to be space efficient so that the binary file doesn't get too large. This feature of

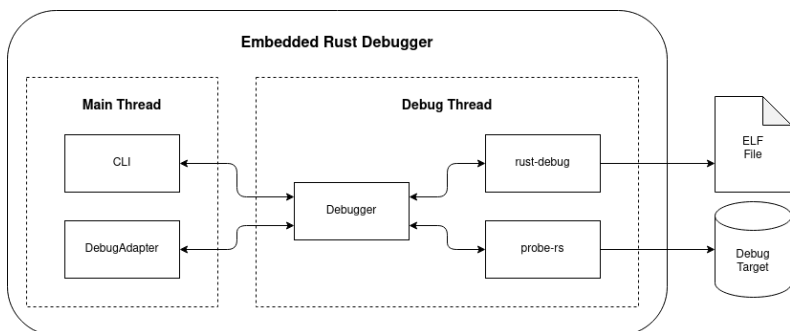


Figure 7: Diagram showing all the moduls of emmbedded rust de-bugger and there relations to each other.

the DWARF format has a side effect in that it makes it much more complicated for retrieving the information wanted. Luckily there exist a library called *gimli-rs*[gim] that simplifies reading the DWARF format. But the library still is very complicated to use because it required a lot of knowledge about the DWARF format. Thus the *rust-debug* library was made to simplify this problem even more so that almost no knowledge of the DWARF format is needed.

The library *rust-debug* is built apone the *gimli-rs* library and doesn't restrict the user from accessing the functionality of that library. It uses the *gimli-rs* library for paring the DWARF sections into more workable data structures, the figure 8 shows how they are connected. The goal of the design of the library is that a user should be able to just call a function for retrieving debug information such as a stack trace and at the same time be able to use the *gimli-rs* functionality to retrieve the same information if wanted. The library is has the features to restive the call stack, stack frames, variables, sourceinfomaiton and a function for evaluating the values of variables, the code for this library can be found in the git repository [Lunc].

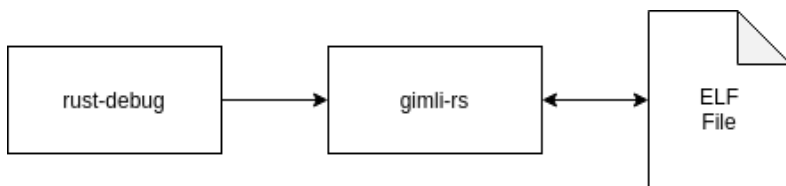


Figure 8: A diagram showing the relation between the *ELF* file and the two libraries *rust-debug* and *gimli-rs*.

### 5.1.1 Finding Source Location

Some of the dies have attributes that starts with *DW\_AT\_decl\_*, these attributes describe which source file and where in it this dies was declared. The library has a function for retrieving the value of all these attributes and it returns as *SourceInformation* struct. This struct contain the directory, file name, line number and column number where the die was declared in the source files. The line and column number is very simple to retrieve because it is the same as the value of the attributes *DW\_AT\_decl\_line* and *DW\_AT\_decl\_column*. It is much more complicated to get the directory and file name because the value of the attributes *DW\_AT\_decl\_file* is a file index that needs to be looked up in the current units line program. The line program indexes all the file entries and can thus be used to find the directory and file name from the file index. If any of these attributes are not present in the die then the result of this function will be that that entry has a *None* value.

### 5.1.2 Accessing Memory And Registers

As mention before one of the requirements for evaluating the value of a variable is access to the registers and memory of the debug target. This library does not have that functionality because the problem of accessing memory and register is out of scope for this library. The reason being that it would limit the number of systems

it could be used for too the systems it support and also the goal of this library is to make it simpler to get debug information from DWARF, and not to provide an interface to the systems memory and register. That lead to the motivation of creating a data structure that holds these needed values of the system. The implementation is just a struct with two hashmaps, one for the memory values and one for the register values. It also has some methods for retrieving the stored values. This struct is then used as an argument to the functions in the library and if a value that is not present in the data structure is needed the result of the function call will be a request to add the to the data structure and call the function again. This has a negative effect in that some of the calculations will be repeated multiple times but it is not very notable.

### 5.1.3 Evaluating Variables

The library has a structure called *VariableCreator* which takes a reference to the DWARF unit and die of the variable. Then there is a evaluation method that takes the memory and registers data structure and preforms calculation to evalue and retrieve variable information. This method return an enum that either tell the user what memory or register values are needed, or that the it is done and the method *get\_variable* can be used to get the variable. The variable structure contains the name, value, type, sourcelocaiton and the location of where the value was evaluated from.

### 5.1.4 Evaluating Call Stack

Using the call stack result each call frame can be used to create a stack frame. These stack frames are like the call frames except that they have more information like the function name of the frame, where the function was declared and the value of all the variables. The way this library constructs a *StackFrame* struct works the same way as when creating a variable. Meaning that there is a helper struct for creating the stack frame which requires the memory and

register struct as an argument. This helper struct when created will find the name of the function for this frame and where it was declared, then it will go through all dies that belong to that function to find all the variable dies and store it in a list. This list of variable dies is then used to evaluate all variables and each entry is removed when evaluated and the result stored in a variables attribute. Thus if one of the variables requires a value from memory that is not present in the memory and register struct then all the variables already evaluated doesn't need to be evaluated again. The evaluating of the variables is done in the same way as describe above the only difference is that the registers values is set to be the ones evaluated in the call frame. Thus adding the value of a register to the memory and register struct won't do anything when evaluating a stack frame. Then lastly the stack frame can be retrieve using the method *get\_stack\_frame* from the stack frame helper struct.

### 5.1.5 Finding Breakpoint Location

There is also a function for finding out what machine code address a certain line in a source file corresponds to. It works by first finding out which compilation unit that the source file corresponds to by looping trough all the file entries in all of the compilation units. Then it loops through all the rows in that file entry and adds all the rows that match the source line number. If the vector is empty after that then there is no machine code instruction that matches that source line otherwise it is not empty there is at least one instruction that corresponds to that line. When there are multiple match the function will take the one that has the nearest column value to the source lines column value.

## 5.2 Debugger

The acutal debugger called *Embedded Rust Debugger*(the code for the debugger can be found in the git repository [Luna]) consists mainly of two main threads called the *main thead* and the *debug*

*thread*. The *main thread* is the thread that handles the input from the user from the console or through Debug Adepter Protocol (DAP) and the *debug thread* handles the reading of DWARF information and connection to the debug target. There is also another thread in the debugger called *input thread* that is only activated if the user is using the console, its job is to read the input and send it to the *main thread*.

### 5.2.1 The Debug Thread

The debug thread has two main state that it changes between, the first state is when it is not attached to any debug target and is called `DebugHandler`. The second state is when it is attached to the debug target which means that this state is where debugging can happen, it is called `Debugger`.

Going back to the first state, its purpose is to await instructions to attach to the debug target and to receive configuration required for that to happen. These configurations that the debugger requires is a path to the elf file, a path to the work directory of the code that should be debugged and lastly the type of chip. When all these are configured the attach command can be used to attach to the micro controller, all the other commands that require that the chip is attached can also be used to attach.

The debugger uses the library *probe-rs* [Yat] to attach to the micro controller and to interact with it. Thus a lot of useful debugging features like stopping, continuing and setting hardware breakpoints is already given by the *probe-rs* library. The other features supported by the debugger uses the library *rust-debug* together with the *probe-rs* library. But the two libraries are separate so they never interact with each other, the figure 9 shows how all of these parts interact. The *rust-debug* library as mentioned above and seen in the figure 9 is a library for retrieving information from the *DWARF* sections in the ELF file. To get some of the information from the library values in the debug targets memory and/or registers are needed. Thus when calling the *rust-debug* library it can sometimes give a response that

says it requires some value from a registry or a memory address, the debugger then uses *probe-rs* to get that value. Then the read values are sent in to the same *rust-debug* library function as before by storing them in the memory struct that the library uses to read values from the target. This repeats until the *rust-debug* library returns the requested value or an error if something has gone wrong with reading the DWARF format.

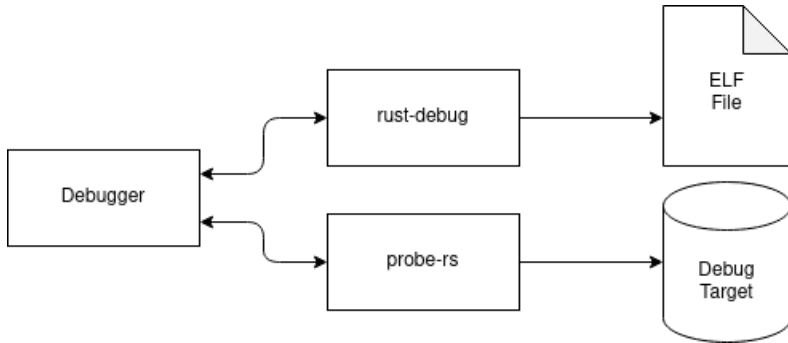


Figure 9: A diagram showing the relations between the debugger, the *ELF* file, the debug target and the two libraries *rust-debug* and *probe-rs*.

### 5.2.2 Simultaneous Handling Of Request And Events

To simultaneously handle incoming request from the user and events that happens in the debug target, the debugger polls the channel for incoming request and the state of the debugger. To reduce the amount of polling of the state of the debug target the debugger has a boolean that keeps track of the state of the debug target. This boolean is to track if the debug target is running or is stopped. And because events can only occur if the debug target is running the polling only needs to be done when it thinks the debug target is running. Thus this is how the debugger can handle request from

the user and near simultaneously handle events that happen in the debug target.

### **5.2.3 Optimization Of Repeated Variable Evaluation**

To improve of the performance of the debugger the debugger stores the value of the stack frames every time they are calculated. This allows for fast repetitive look up of stack frame information and variables. The stored stack frame values are only stored when the debug target is stopped and are removed when the debug target starts. Thus the wrong values will never be shown to the user. Also another feature of the debugger is that if the value of a variable is request the debugger will restive all the stack frames instead and then search for the requested variable. This simplifies the implementation a lot and will also make the debugger faster when repeated request are made.

### **5.2.4 Command Line Interface**

The *CLI* is very simple and works by having a thread that constantly waits for an input from the command line. When an input is given to the thread it tries to parses the input into a request for the debugger. It parses the input by first comparing the fist word of the input to all the commands, if it matches a command then the rest of the input is parsed by using the specific parser for that command. If the input does not mach any of the commands then an error is printed to the user. When the input has been parsed into a request it is then sent through a channel to the main thread which forwards it to the debug thread. Then when the main thread gets a response back from the debug thread it prints the result to the user and sends a boolean back to the thread that reads the input. The boolean tells the thread if it should continue reading inputs or if it should stop. The main tread constantly awaits a request from the input thread or a response or event from the debug thread. It does this by constantly polling the two channels. If the main thread receives a event from



the debug event is displays it to the user and continues as usual.

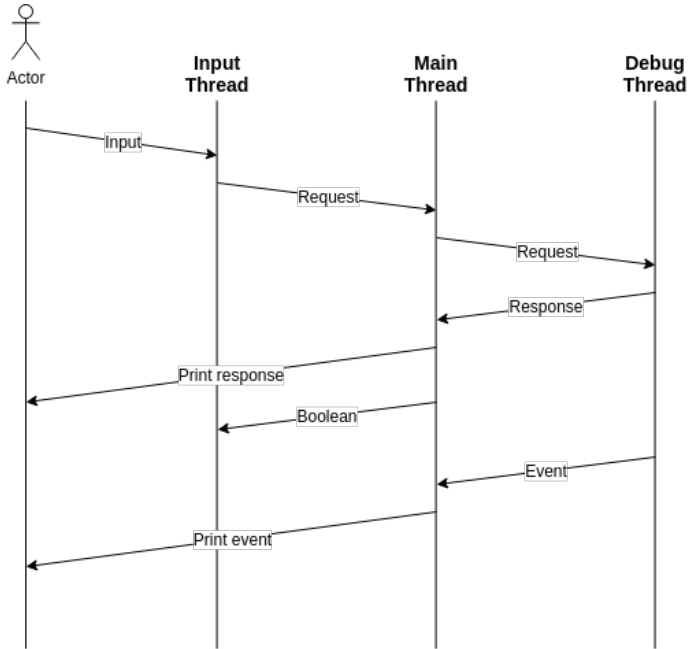


Figure 10: A diagram showing the communication between the user/actor and the three different threads.

### 5.2.5 Debug Adapter

The debug adapter is implemented as a TCP server that listens for new connection on a specified port. Then when a new connection is made it communicates with the client using the *Microsoft Debug Adapter Protocol*. Looking at figure 11 show the flow of communication between the different processes from the user to the debugger. When a user interacts with the debugger extension in *VSCode*, it

will intern send a DAP message to the debug adapter server over the TCP connection. The debug adapter will then process the message and translate it to commands that the debugger in the debug thread can understand and send them through a channel to the debug thread. The debug thread will then intern process the commands and send responses back to the debug adapter which in tern can translate the response and forward it back to the *VSCode* extension. That is the normal flow of communication but there is another case that can happen. Which is when a event happens on the debug target, this event could be that the debug target has stopped for some reason. In this case the flow of communication starts at the debug thread which can be seen in figure 11. The debug thread then sends the event to the debug adapter which in tern sends it to the *VSCode* extension, where it is then shown to the user by *VSCode*.

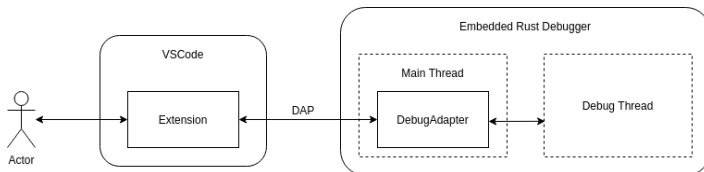


Figure 11: A diagram showing the communication between the user/actor, *VSCode* and the debugger *Embedded Rust Debugger*.

### 5.2.5.1 Initial DAP Messages

It is required the the first few DAP messages sent to the debug adapter is for configuring the debug adapter by communicating the supported capabilities of the debugger and *VSCode*. This debugger doesn't support any of the optional capabilities that are defined in the DAP protocol and will thus not show up in *VSCode*. After everything is configured then the debugger will get a requires to flash the connected debug target with the program that is going to be debugged. Now the debug adapter is started and will work as a

middle man between the debugger and the GUI.

#### **5.2.5.2 Translating DAP Messages To Internal Messages**

The debug adapter and the debugger is running on separate threads and thus communicate asynchronously using channels. The channels uses a different set of commands then that is defined in DAP which means that the debug adapter translates these commands and forwards them. This means that a single DAP message can result in multiple commands being sent from the debug adapter to the debugger.

#### **5.2.5.3 Simultaneous Handling Of DAP Messages And Events**

Because the debug adapter can get messages from both the GUI and the debugger at any time it uses continues polling on the TCP connection and the channel. This enables the debug adapter to forward messages sent by both *VSCode* and the debugger.

### **5.3 VSCode Extension**

The *VSCode* extension for the debugger *Embedded Rust Debugger* is a very simple and bare bones implementation, the code for the extension is in the git repository [Lunb]. *Microsoft* provides *API* which can be used to starting a debugging session and trackers for logging what is happening in the debugging session. The implementation of the extensions uses the *API* to create a tracker that logs all the sent and received messages, it also logs all the errors. It also creates a session that tries to connect to a DAP server on a configurable port or uses a already existing session. Then there is some extra arguments added to the configuration DAP message sent to the debug adapter.

## 6 Evaluation

To evaluate the solution to the problem (see section 2.3) there are three important criteria. The first one is how much more useful debug information does the solution get from the compiler, this is to evaluate the first part of the problem. For the second part the debugger presented in this paper needs to be compared to the already existing debuggers to see if any improvement is made to debugging optimized *Rust* code. The two most popular debuggers used for debugging *Rust* code are *GDB* and *LLDB*, thus it is these two debuggers that will be compared to the presented debugger. The reason being that they are the two debuggers that are supported by the *Rust* dev team according to their *rustc-dev-guide* [Teaa]. The criteria they will be compared to is how well the debuggers can retrieve debug information from optimized code and how well they can display that information to the user. Because getting the information is important but it is pretty much useless if it is not displayed in a user friendly way.

### 6.1 Compiler settings comparison

The *Rust* compiler has some compiler options that the user can set when compiling a project that effect the code generation and the debug information. It also enables the user to access some of the compiler options for LLVM that is the backend of the compiler. The first part to finding if any of these compiler options effect the debug information generated in a meaningful way is to read what they do and determine if they might do that. Then the compiler options need to be tested manually to see if any of them actually have any meaningful effect and that the option doesn't effect the speed of the optimised code in a negative way. This is very hard to do and takes a lot of time to do it properly, thus the testing done will be limited to checking the DWARF file and the debugging experience.

When going through all the possible *rustc* compiler options for code generation that are listed in the *rustc book* [Teab], there where

two that have the most impact on the amount of debug information generated. The most important one of these is the flag named *debuginfo* which controls the amount of debug information generated. It has three options, the first is option 0 which means that no debug info will be generated. The second option is 1 which will only generate the line tables and the last is option 3 which generates all the debug information it can. Thus it is clear from the description in the *rustc book* that this flag should always be set to 3 when debugging.

The other key compiler option is the optimization flag named *opt-level*, it controls the amount of optimization done to the code and which type of optimization, size or speed. Comparing the different optimization levels the debug information got less and less when a higher optimization level was set on a simple blink code example. The highest optimization level for speed is 3 and the result from using is that the debug information got very limited, thus making it extremely hard to debug. In the testing of the three optimization levels 1, 2 and 3 it seems that optimization level 2 worked the best for debugging without making the program too slow.

There are two other rustc compiler option flags that are important for debugging but sometimes not necessary depending on the target. The first one is called *force-frame-pointers* and does what is say, it forces the use of frame pointers [Teab]. The other one is called *force-unwind-tables* which forces the compiler to generate unwind tables in the DWARF file [Teab]. These two flags set to ‘yes’ can ensure that the debugger can unwind the stack and display the callstack to the user.

Looking through all the LLVM arguments that are available through rustc yielded one more argument that affects the debug information generated. The argument is named *debugify-level* and controls the kind of debug information that is added to the DWARF file. There are two options for this argument, the first is called “*location+variables*” and adds locations and variables to DWARF. The other option is called “*locations*” and only adds locations to DWARF. When testing out both of these options on optimized code there was no noticeable difference in the debugging experience and

no noticeable difference in the DWARF file.

## 6.2 Debugger Comparison

The testing and comparing of the three different debugger is done manually on some example code, see the git repository [HL] for the example code. The example code was many times modified to test how well the three debugger handled the different situations. This was repeated until there was any difference in the result between the three debuggers. There were two of these cases found when the code was compiled with optimization 2. Also to keep it fair in these cases a software breakpoint was added to the code, this ensures that all the three debuggers stop on the same machine code instruction. This is important because if they are not stopped on the same machine code instruction then the comparison is unfair because some of the information can have been optimized out for one of the debugger making it look worse than the other ones.

The GDB debugger gave a wrong answer when debugging the value of an enum named *test\_enum3*, the value that GDB can be seen in figure 12. The expected value is *TODO* which is not the same as what GDB gave.

```
(gdb) p test_enum3
$ 1 = nucleo_rtic_blinking_led::TestEnum::ITest(<optimized out>)
```

Figure 12: GDB debugging result from evaluating variable *test\_enum3* when stopped at the software breakpoint in the example code.

Doing the same using the debugger presented in this thesis shows that it also is not the same value as expected, the result can be seen in figure 13. The printing looks a bit different but the result from the debugger presented in this thesis tells the user that the enum *test\_enum3* is an enum of type *TestEnum* where the actual variant has been optimized out. While GDB also tells that *test\_enum3* is of

type *TestEnum* and that it is of the enum variant *ITest* where the value is optimized out. As can be seen GDB gives the wrong answer because it says that *test\_enum3* is the enum variant *TestEnum::ITest* which is wrong. While the debugger presented in this thesis says that the value has been optimized out which is a more correct answer.

```
Some("test_enum1") = "TestEnum { ITest::ITest::ITest { __0::20 } }"
Some("test_enum2") = "TestEnum { Non::Non::Non { } }"
Some("test_struct") = "TestStruct { num::123, flag::< OptimizedOut > }"
Some("test_enum3") = "TestEnum { < OptimizedOut }
```

Figure 13: Debugger presented in this thesis debugging result from evaluating some enum variables when stopped at the software breakpoint in the example code.

Doing the same using LLDB give almost the same result as the debugger presented in this thesis and that result can be seen in figure 14. LLDB doesn't print that the variant of the enum has been optimized out which makes the reason why it is not printed ambiguous.

```
(nucleo_rtic_blinking_led::TestEnum) test_enum1 = {}
(nucleo_rtic_blinking_led::TestEnum) test_enum2 = {}
(nucleo_rtic_blinking_led::TestEnum) test_struct = (flag = false, num = 123)
(nucleo_rtic_blinking_led::TestEnum) test_enum3 = {}
```

Figure 14: LLDB debugging result from evaluating some enum variables when stopped at the software breakpoint in the example code.

Now when inspecting what is stored in the DWARF format it shows that the variant of the enum is optimized out but not the two other values that make up the value stored in the variant. The fact that the value that indicates with variant is optimized out makes it impossible for any debugger to evaluate the value stored in the enum. This is because the encoding of the bytes is unknown and because the number of bytes to read from the stack is unknown.

Looking back at figure 14 there are three other enums there where two of them don't have a value as well, they are named *test\_enum1*

and *test\_enum2*. Those two enums should have a value but for some reason LLDB is not able to evaluate them, but looking at figure 13 shows the values they should have. Also looking at figure 12 shows the same result as in figure 13 thus both GDB and the debugger presented in this thesis is able to evaluate the correct value. Going back again to figure 14 which shows that the value of the attribute *flag* is equal to *false*, but looking at figure 12 and 14 shows that the value of *flag* is equal to *true*. The correct value when looking at the original source code is that the attribute *flag* should be equal to *true*, thus meaning that the result from LLDB is incorrect.

Another problem found is with values that are temporarily not present in any register or the stack which means that it is temporarily optimized out or out of range. An example of this is the value of the variable *test\_u16* which is a unsigned 16 bit integer that is temporarily optimized out when stoped at the software breakpoint in the example. When evaluating this value GDB prints that the value is optimized out which can be seen in figure 15, this is the same output it gives for a value that is totaly optimized out(example of this is the value of *test\_struct* shown in figure 12).

```
(gdb) p test_u16
$1 = <optimized out>
```

Figure 15: GDB debugging result from evaluating variable *test\_u16* when stoped at the software brekpoint in the example code.

Doing this with LLDB gives the result *j variable is not available* which can be seen in figure 16.

```
(unsigned short) test_u16 = <variable not available>
```

Figure 16: LLDB debugging result from evaluating variable *test\_u16* when stoped at the software brekpoint in the example code.



Easy comparing this to the output of the debugger presented in this thesis which give the value *OutOfRange* (see figure 17). The result from both LLDB and the debugger presented in this thesis are unique and only happen in these situations thus making it easier for the user to understand that the value is temporary optimized out then the result from GDB. This is because the result that GDB generates is used in multiple situations thus making it unclear if the variable is totally optimized out or just that it is temporarily optimized out.

```
>> variable test_u16
test_u16 = <OutOfRange>
    line: 69
    file: src/main.rs
    directory: /home/niklas/Desktop/exjobb/nucleo64-rtic-examples
Location: []
>>
```

Figure 17: Debugger presented in this thesis debugging result from evaluating variable *test\_u16* when stopped at the software breakpoint in the example code.

## 7 Discussion

TODO

### 7.1 Debug Information Generation

This thesis was not really able to improve the amount of debug information generated by `rustc` and LLVM. There are some options mention in the section 6.1 that generate debug information, but they are well known and a must to debug *Rust* code. Thus the result presented there is noting new for most developers that program in *Rust*. To really improve on the amount of debug information generated one has to work on the compiler or LLVM and make the optimization passes keep more information.

### 7.2 Debug Experience For Optimized Rust Code

At the beginning of this thesis it was thought that the GDB debugger was not able to evaluate variables where the value is located in registers. This thought came from the observation that GDB for the most time prints that almost all variables are optimized out when debugging optimized code. Thus it was thought that those variables were completely removed from the optimized code. But as it turns out they weren't, instead they were just optimized out at that pedicular point. Keeping these expectation in mind the result in section 6.2 were a bit disappointing. The only improvement that could be made for this problem is that different messages are displayed for the different situations. This helps the user understand more what is happening in the code because they can now know if a variable is completely optimized out of the code or if it is just temporally optimized out.

Unexpectedly there was another problem with both debugger GDB and LLDB that could be improved on. That problem is that both mentioned debuggers had problems with the evaluation of the *enum* type in *Rust*(see section 6.2 for the specific problems they

have). The reason for this problem is that many other programming language doesn't allow *enums* to have any value stored in them like *Rust* allows. The LLDB debugger had much more problems with this then GDB which only gave the wrong value when the enum variant was optimized out. Thus unexpectedly the debugger in this thesis could improve on that by evaluating the correct value. And in the case of the value of the enum variant being optimized out it could display that it was optimized out, thus not giving the wrong value as GDB does.

### 7.2.1 Debugging Rust Code On Embedded Systems

The experience of debugging *Rust* code on embedded systems with both LLDB and GDB is not very good. There is a lot of configuring that has to be done and both require a program like *openocd* that handles the communication between the debugger and the target device. Removing this need of using a program like *openocd* made the debugging experience a lot better using the debugger presented in this thesis. The reason being that it takes fewer steps to start debugging.

### 7.2.2 Contributing to the Rust Debug Community

As mention before this problem is huge and complex thus to really make a change in debugging optimized *Rust* code more people have to contribute. One of the best ways of getting more people involved is by making it easier to contribute. The debugging library *rust-debug* does just that by simplifying the process of retrieving debug information from dwarf. If more developers start using *rust-debug* will force the library to also become better and intern also force *gimli-rs*, *rustc*, LLVM and DWARF to become better.

## 8 Conclusions and future work

The problem of improving debugging for optimized *Rust* code is a very complex problem and a very large one. To make it easier to solve this problem, the problem was divided into two parts and had a lot of delimitations. The first part of generating more debug information was not very successful, because all of the options found to generate more debug information are well known. Thus none of them are really an improvement because most *Rust* developers already use them. But the other part of creating a debugger that improve on optimized *Rust* code on embedded systems was successful. The main reason for this is that the debugger in this thesis is able to correctly evaluate the value of variables that are of the enum type. Were Both of the two supported debugger by the *Rust* team does sometimes evaluate variables of the enum type into the incorrect value. It was also able to simplify the process of debugging embedded systems that run *Rust* code. Then there is also the fact that this thesis lead to the creation of a debugging library called *rust-debug* which simplifies the process of retrieving debug information from the DWARF format. Thus overall I would say that goal of improving debugging of optimized *Rust* code was achieved, but that there is still a lot that needs to be done.

### 8.1 Future Debugging Improvement

One of the main problems with debugging optimized code is that the variables are stored in registers and never pushed to the stack. Thus after the variables are done with they are often overwritten and this makes it impossible for the debugger to know the value they had. This makes debugging very hard because the user has to find the correct machine code locations where the value is in a registry, which is not easy. But if the debugger is able to get the last value of the variable somehow it could display it as the last known value of the variable. It could maybe be done by storing the value of the variable before it get overwritten, but that is a hard problem

in it self. There is no time to make a solution for this problem, thus this will have to be left for future work.

## 8.2 Future Debugger Improvement

The debugger presented in this thesis only supports most important functionalities of a debugger. Thus there is many more features that could be added. One important one is the ability to evaluate expression which is left to be done as future work. This is a really hard problem because the evolution of the expressions should work exactly the same as the *Rust* compiler. Thus it would be best if the same code could be used so that it doesn't need to be written twice.

## 8.3 Future Debugger Library Improvement

Currently the debugging library *rust-debug* is not able to display a pointer and the value it points to. When a user wants to evaluate the value of a variable that is a pointer such as a string, they most often want the value of the string and not the pointer to the string. This problem is a little hard because sometimes the user want the value of the pointer. Implementing a solution for this is left as future work.

## References

- [Com10] DWARF Debugging Information Format Committee. *DWARF Debugging Information Format version 4*. Tech. rep. June 2010.
- [gim] gimli-rs. *gimli github page*. URL: <https://github.com/gimli-rs/gimli>. (accessed: 17.08.2021).
- [HL] Mark Håkansson and Niklas Lundberg. *nucleo64-rtic-examples*. URL: <https://github.com/Blinningjr/nucleo64-rtic-examples.git>. (accessed: 17.08.2021).
- [Luna] Niklas Lundberg. *embedded-rust-debugger*. URL: <https://github.com/Blinningjr/embedded-rust-debugger.git>. (accessed: 17.08.2021).
- [Lunb] Niklas Lundberg. *embedded-rust-debugger-vscode*. URL: <https://github.com/Blinningjr/embedded-rust-debugger-vscode.git>. (accessed: 17.08.2021).
- [Lunc] Niklas Lundberg. *rust-debug*. URL: <https://github.com/Blinningjr/rust-debug.git>. (accessed: 17.08.2021).
- [Mic] Microsoft. *Debug Adapter Protocol Homepage*. URL: <https://microsoft.github.io/debug-adapter-protocol/>. (accessed: 17.08.2021).
- [Net+] Nicholas Nethercote et al. *The Rust Performance book*. URL: <https://nnethercote.github.io/perf-book/build-configuration.html>. (accessed: 20.08.2021).
- [RD] Gokcen Kestor Rizwan A. Ashraf Roberto Gioiosa and Ronald F. DeMara. *Exploring the Effect of Compiler Optimizations on the Reliability of HPC Applications*. Tech. rep.
- [Teaa] Rust Team. *Debugging support in the Rust compiler*. URL: <https://rustc-dev-guide.rust-lang.org/debugging-support-in-rustc.html>. (accessed: 18.08.2021).

- [Teab] Rust Team. *The rustc book: Codegen options*. URL: <https://doc.rust-lang.org/rustc/codegen-options/index.html>. (accessed: 19.08.2021).
- [Teac] The LLVM Team. *Source Level Debugging with LLVM*. URL: <https://llvm.org/docs/SourceLevelDebugging.html>. (accessed: 20.08.2021).
- [Yat] Yatekii. *probe-rs Homepage*. URL: <https://probe.rs/>. (accessed: 17.08.2021).