

# Master Thesis

Niklas Lundberg, [inaule-6@student.ltu.se](mailto:inaule-6@student.ltu.se)

July 8, 2021



# 1 Abstract

TODO

# Contents

<b>1</b>	<b>Abstract</b>	<b>2</b>
<b>2</b>	<b>Introduction</b>	<b>4</b>
2.1	Background . . . . .	4
2.2	Motivation . . . . .	4
2.3	Problem definition . . . . .	5
2.4	Equality and ethics . . . . .	6
2.5	Sustainability . . . . .	6
2.6	Delimitations . . . . .	6
2.7	Thesis structure . . . . .	7
<b>3</b>	<b>Related work</b>	<b>8</b>
<b>4</b>	<b>Theory</b>	<b>9</b>
<b>5</b>	<b>Implementation</b>	<b>10</b>
5.1	Debug Library . . . . .	10
5.2	Debugger . . . . .	10
5.3	Debug Adapter . . . . .	10
5.4	VSCoDe Extension . . . . .	10
<b>6</b>	<b>Evaluation</b>	<b>11</b>
<b>7</b>	<b>Discussion</b>	<b>12</b>
<b>8</b>	<b>Conclusions and future work</b>	<b>13</b>

## 2 Introduction

Debugging Rust code on embedded system today is not a very good experience for many reasons. One of the big problems is debugging optimized code is often near impossible. That is because the compilers today are very good at inlining the code and removing unused code. This changes the program so drastically in many cases that when trying to debug the code all the original variable can be optimized out. Thus the user doesn't get any useful information from the debugger about the program which makes is near impossible to debug. One of the big reasons why variable gets optimized out is because unoptimized code always push the value of the variable to memory which then can be read by the debugger at anytime. This is not done for optimized code because speed is prioritized and storing the value of a variable that will not be used on the stack is costly. Thus the time that most variable exist is very short in optimized code which results in that the debugger saying that a variable is optimized out.

### 2.1 Background

TODO

### 2.2 Motivation

The main motivation is that optimized *Rust* code can be up to 100 times faster then unoptimised code. That is a very large difference in speed compared to other languages like *C* for example, were the optimized code is about 2-4 times faster then the unoptimized code. Thus for language like *C* it is much more acceptable to not be able to debug optimized code because the different isn't that large compared to *Rust*. But in the case of *Rust* code the different is so large that some programs are to slow to run without optimization. This causes the problem that the code can't be debugged because debuggers don't work well on optimized code and unoptimized code is to slow to run. Because of that there is a need for debuggers that can give enough information to debug optimized *Rust* code. Then there is also the argument that relying only on testing the optimized code instead of going through and checking that is is correct is bad. The reason being that there can be extremely many paths that needs to be tested and it is sometimes not feasible to test all of them. In these cases it is less costly to verify that the code is correct then to test every path.

Another large motivation for this thesis is that the most common way of debugging *Rust* code on embedded systems is complicated for a beginner. One of the reason being that it requires two programs being *openocd* and *gdb*, it also requires configuration files which takes some time to understand and configure. This is not very accessible for people that have no experience with these programs and is unnecessarily complicated. The ideal solution for accessibility would be to have a single program instead of two and that it requires less configuring, thus making it as easy as possible for a new person to debug there code.

Most of the debuggers used for *Rust* code are written in other programming languages and there isn't a lot of debugging tools written in *Rust* yet. Thus one of the motivation for the thesis debugger to be written in *Rust* is to contribute with a example of a debugger written in *Rust* to the *Rust* community. This also relates back to improving debugging for optimized *Rust* code because that is a large and hard problem that requires a lot of work to solve and to maintain the solution. One of the most realistic way that will happen is if the *Rust* community around debugging grows and more people contribute with there solutions and ideas.

Another way this thesis contributes to the *Rust* community is by making a library that simplifies the process of retrieving information form the debug information. This is important because it makes retrieving debug information simpler for new developers to start contributing to the *Rust* debug community. Which will hopefully lead to better debugging for optimized *Rust* code.

There is also a economical reason wanting to have debuggers that work well for optimized code. As mentioned before testing all the paths in a program is sometimes not feasible because of the amount of work needed. But verifying that the program is correct and that the implementation is correct is another way to ensure that the program works as intended. It is even sometimes the preferred solution because then the program is proven to work correctly. And a debugger is one of the vital tools needed for confirming that a implementation is correct. Verifying the correctness of a program and the implementation can also be cheaper then testing in those cases where the programs has extremely many paths. Thus improving the tools needed to verify the correctness of the implementation can intern reduce the cost of verifying that the program works as intended. And it can even reduce the amount of money witch companies spend on testing there code. The amount of money spent on testing of code each year is about xxx and thus the potential savings on testing us huge.

## 2.3 Problem definition

There are two main problem that this thesis tries to tackle to improve the experience of debugging optimized code for embedded systems. The fist problem is about the generation of the debug information, if more debug information can be generated then there is more information the debugger can retrieve an show the user. This is also were the problem starts with debugging optimized code, because debuggers needs the debug information to understand the relation between the source code and the machine code. Thus it is very important that the compiler generates as much debug information as possible, because there is nothing that can be done later to get more information. The first problem then is to look at the different options that can be set in the *llvm* compiler to improve the generations of debug information without impacting the optimisation of the code to much. Speed of the resulting code is still a big priority.

The second problem is looking at the available debug information that the *llvm* compiler generates for optimized code and creating a debugger that utilises that information to the fullest. This problem has two parts to it, the first being

retrieving the needed information from the debug information. This will be the hardest part and is the most important for improving the debugging for optimized code. The second part is to display the debug information to the user in a user friendly way.

The goal of solving these two problems is to create a debugger that gives a better debugging experience for optimized rust code on embedded systems than some of the most commonly used debugger, such as *gdb* and *lldb*. And to inspire further development for debugging tools in the rust community.

## 2.4 Equality and ethics

TODO

## 2.5 Sustainability

TODO

## 2.6 Delimitations

As mentioned one of the main problems for getting a debugger to work for optimized code is getting the compiler to generate all the debug information needed. In the case of the *Rust* compiler it is the *LLVM* library that handles the debug information generation. *LLVM* is a very large project that many people are working on and thus it would be too much work for this thesis to try and improve the debug information generation. Thus this thesis is limited in solving this problem by the current functionality of *LLVM*.

The compiler backend *LLVM* that the *Rust* compiler uses supports two debugging file formats that hold all the debug information. One of them is the *DWARF* format that has been around for a long time and is supported by many compilers and debuggers. The other one is *CodeView* format which is developed by *Microsoft* and has also been around for a long time. To make a debugger that supports both formats would be a lot of extra work that doesn't contribute to solving the main problem of this thesis. Thus it has been decided to only support the *DWARF* format because it has good documentation and an open-source community around it.

The scope of this thesis also does not include changing or adding to the *DWARF* format standard. The main reason is that it takes years for a new version of the standard to be released and thus there is not enough time for this thesis to see and realise that change or addition. Another reason is that even if a new version of the *DWARF* format could be released in the span of this thesis, it would take years before the *Rust* compiler had been updated to use the new standard. Currently the newest *DWARF* version is 5 but the *Rust* compiler still uses the *DWARF* 4 format.

Many of the debuggers today have a lot of functionality to help the user understand what is happening in the program that they are debugging. An example of these functionalities are debuggers that support the ability to go backwards

in the program. Functionalities like this are useful but not contributing much to the main problem of debugging optimized code. Which is that most of the source code variables get optimized away and thus making it extremely hard to understand what is happening in the code. So to keep this thesis focused on the main problem the feature the debugger will have is restricted to evaluating stack frames and the variables present in each frame, the ability to add and remove breakpoints. And the ability to control the program by stopping, continuing and stepping an instruction.

When debugging code on embedded systems the debugger needs to know a lot about the hardware the code is running on. It has to know the size of the memory and the number of registers, it also has to know which are the special registers such as the program counter register and more. There is also the endianness of the values store on in memory and registers so the debugger can convert it to the correct type. Then there is also the type of machine code the processes uses and the instruction mode use. To support all the different microcontroller would be to much work for this thesis. Thus the debugger is limited to work with the *Nucleo-64 STM32F401* card because it is the one that is available. And it will only support the instruction set *Thumb mode* made by *arm*. The debugger will be design to work with other similar microcontroller but to test and grantee that it will work with them is to much work for this thesis.

Another part of this thesis is the interaction between the user and the debugger. Existing debugger like *gdb* both have a *CLI* and a *GUI*, thus it is up to the user which one they want to use. From a usability perspective the debugger in this thesis should also have both of the option for the user to choose from. A *CLI* is not that much work to implement but a *GUI* takes a lot of work to implement. Luckily *Microsoft* has made a protocol for debuggers that specifies an adapter that handles the communication between the *GUI* and the debugger. This protocol is called *DAP* and is used by *VSCode*. Thus the scope of the debugger will include implementing the *DAP* protocol and an extension for *VSCode*.

The *DWARF* format is very extensive and supports a lot of different program languages, the specifications for the different languages are a little different from each other. Because this thesis is about *Rust* code the thesis will only go into detail in how to read the *DWARF* format for *Rust*. The specification for the *DWARF* format is also very good at explaining how the information is structured. Thus a this thesis will not go into all the detail in how to read the *DWARF* format instead it will focus on explaining how the information in the *DWARF* format can be used in combination to get important information that the user wants.

## 2.7 Thesis structure

TODO

### **3 Related work**

TODO




## 4 Theory


TODO

## 5 Implementation

TODO

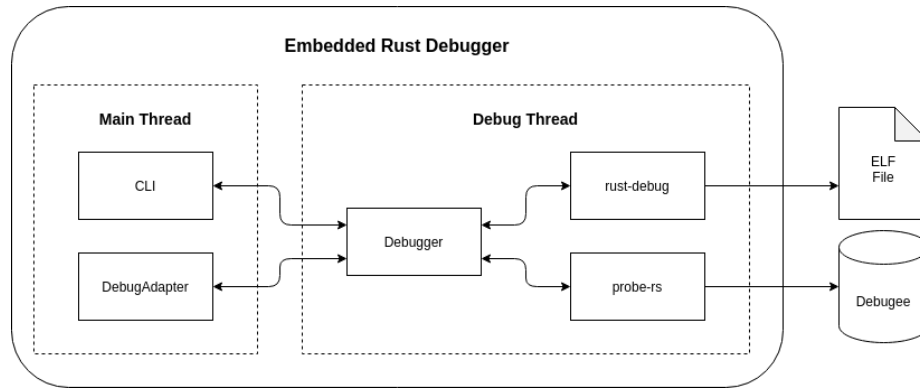

### 5.1 Debug Library

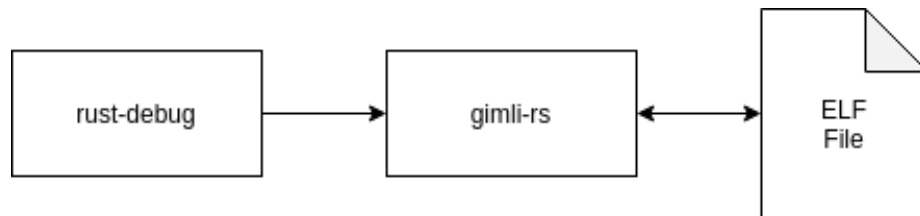

### 5.2 Debugger


TODO

### 5.3 Debug Adapter

TODO

### 5.4 VSCode Extension

The *VSCode* extension for the debugger *Embedded Rust Debugger* is a very simple and bare bones implementation. *Microsoft* provides *API* which can be used to starting a debugging session and trackers for logging what is happening in the debugging session. The implementation of the extensions uses the *API* to create a tracker that logs all the sent and received messages, it also logs all

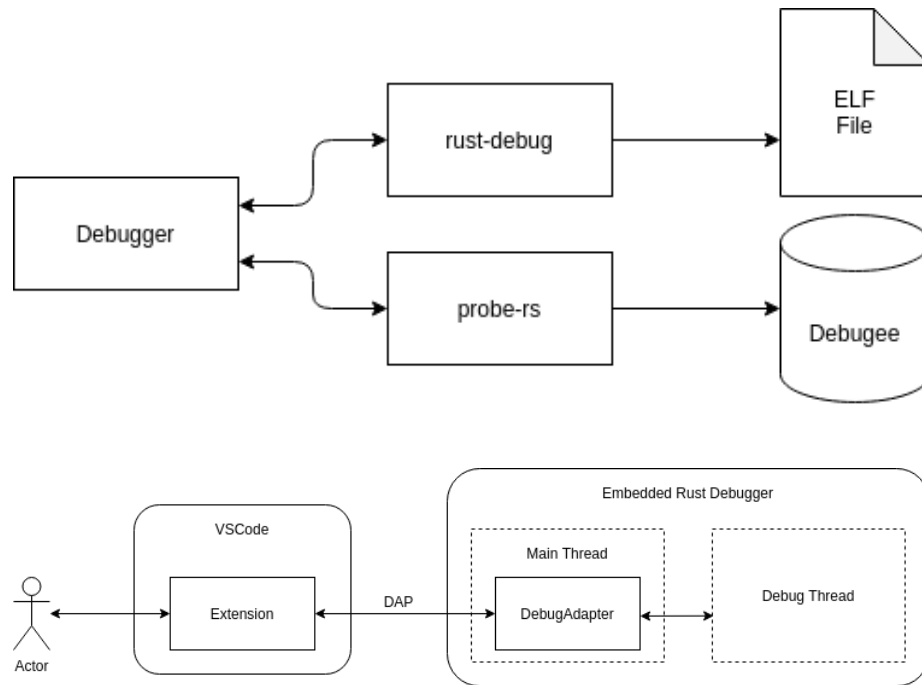

the errors. It also creates a session that tries to connect to a *DAP* server on a configurable port or uses a already existing session. Then there is some extra arguments added to the configuration *DAP* message sent to the debug adapter.

## 6 Evaluation

TODO

## 7 Discussion

TODO

## 8 Conclusions and future work

TODO