

SHETH L.U.J AND SIR M.V COLLEGE

Practical No :- 14

Aim: Mote-to-PC Serial Communication Simulation

Implement serial communication between a sensor mote and PC to monitor real-time data transmission:

Mote.ned:

```
package pc;

simple Mote
{
    parameters:
        double sendInterval @unit(s);
    gates:
        output out;
}
```

PC.ned:

```
package pc;

simple PC
{
    gates:
        input in;
}
```

SerialNetwork.ned:

```
package pc;

network SerialNetwork
{
    submodules:
        mote: Mote
        {
            parameters:
                sendInterval = 1s;
        }
        pc: PC;
    connections:
        mote.out --> pc.in;
}
```

Mote.cc:

```
#include <omnetpp.h>

class Mote : public cSimpleModule
{
private:
    cMessage *timer;
```

SHETH L.U.J AND SIR M.V COLLEGE

Practical No :- 14

```
protected:

virtual void initialize()
{
    timer = new cMessage("timer");
    scheduleAt(simTime()+1, timer);
}

virtual void handleMessage(cMessage *msg)
{
    if(msg == timer)
    {
        cMessage *data = new cMessage("Temperature=25C");

        EV << "Mote Sending Data\n";

        send(data, "out");

        scheduleAt(simTime()+1, timer);
    }
}

virtual ~Mote()
{
    cancelAndDelete(timer);
}
};

Define_Module(Mote);
```

PC.cc:

```
#include <omnetpp.h>

class PC : public cSimpleModule
{
protected:

    virtual void handleMessage(cMessage *msg)
    {
        EV << "PC Received: "
            << msg->getName()
            << "\n";

        delete msg;
    }
}
```

SHETH L.U.J AND SIR M.V COLLEGE

Practical No :- 14


```
};  
Define_Module(PC);
```

omnetpp.ini:

```
[General]  
network = pc.SerialNetwork  
sim-time-limit = 20s
```

Output:


Serial Network Topology

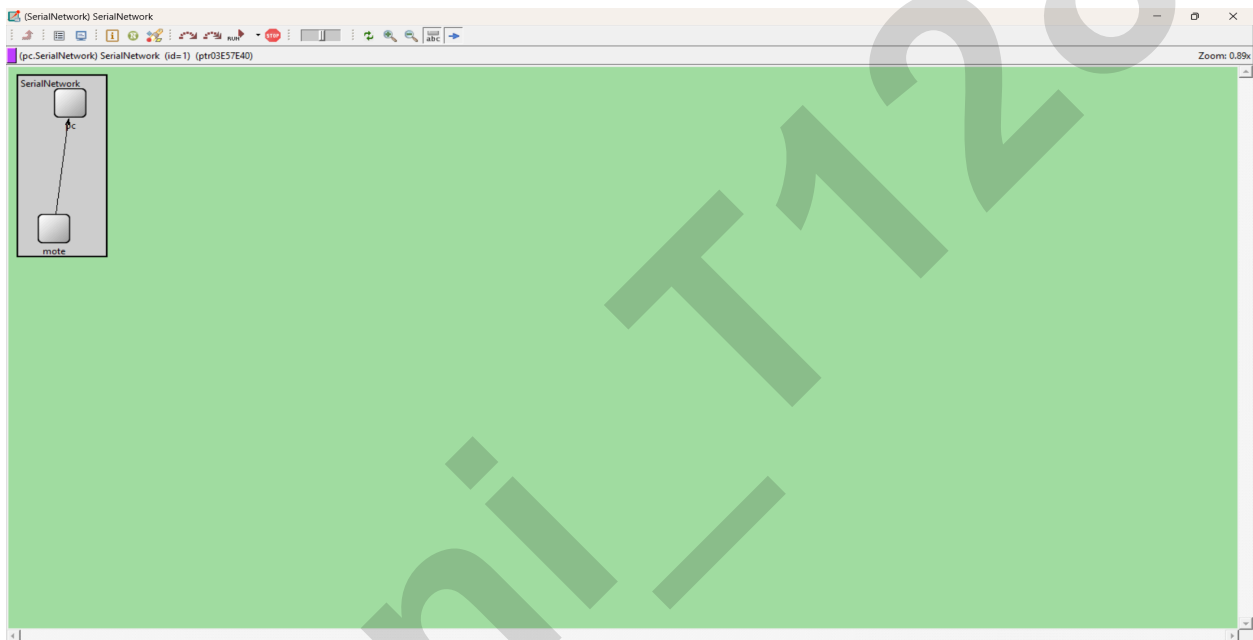

Simulation Execution:


SHETH L.U.J AND SIR M.V COLLEGE

Practical No :- 14

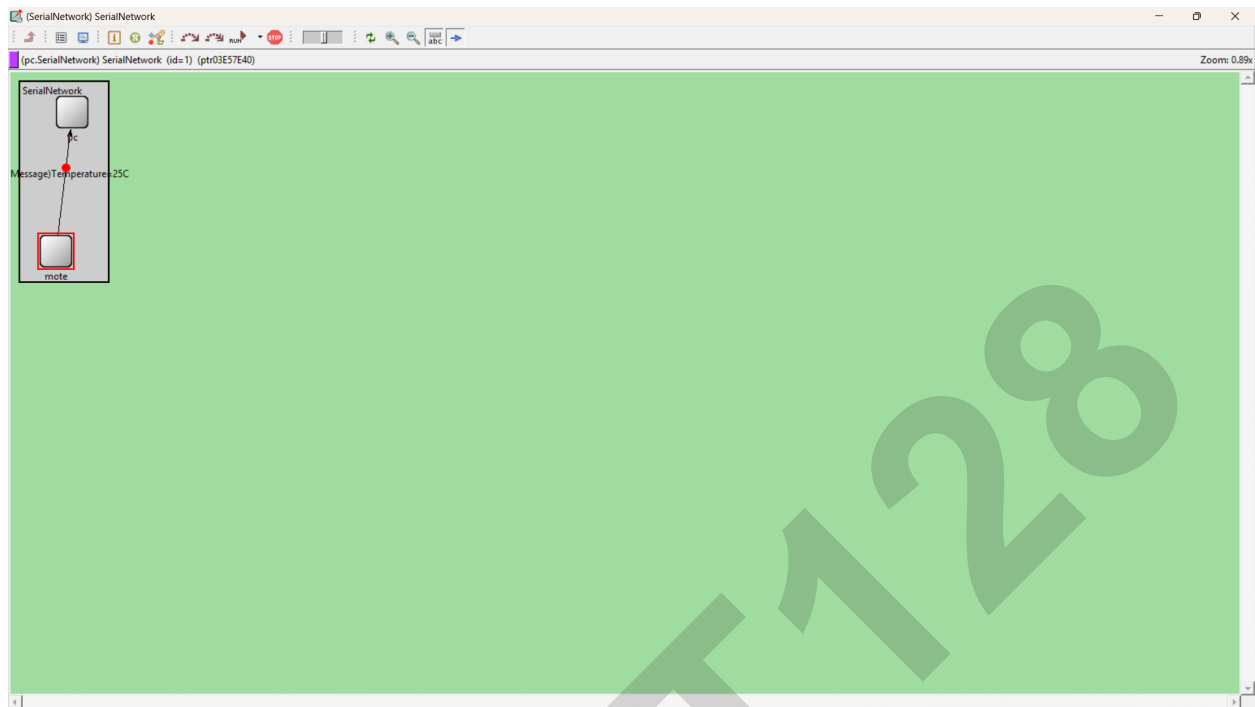

Mote Sending Data Log

PC Receiving Data Log

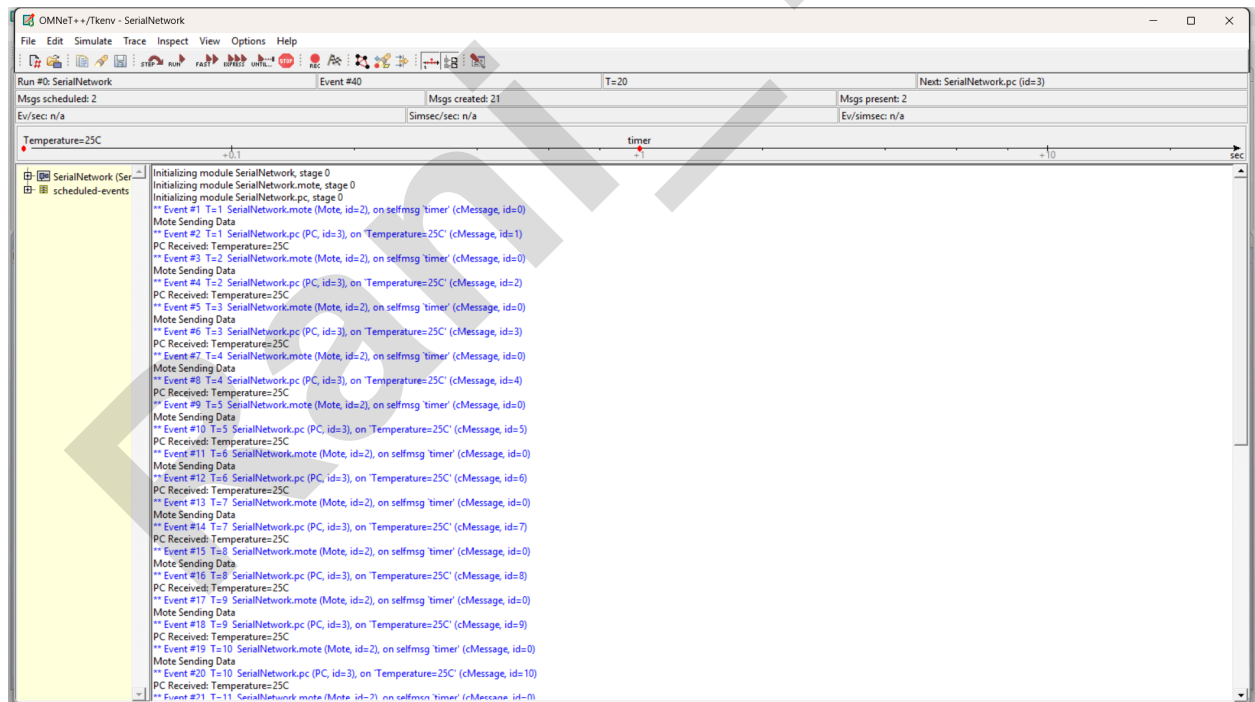

NAME :- RANI_CHAVRE_T128