
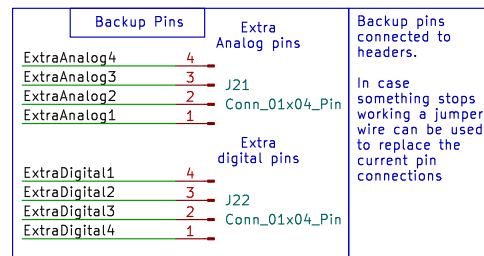
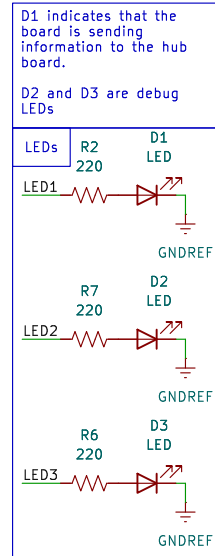
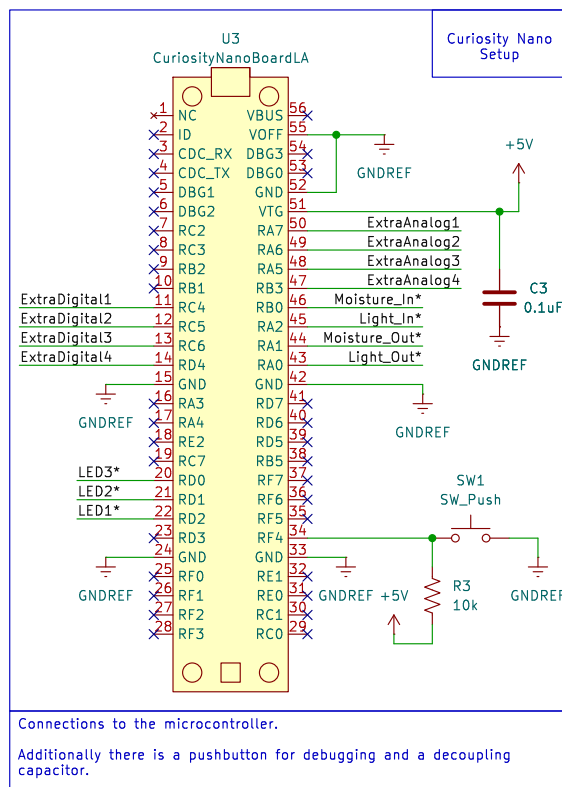
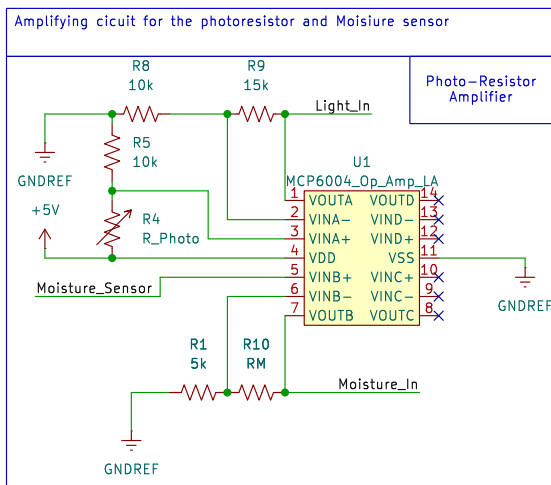


Various headers to be connected with jumper caps.

This is in case a pin gets damaged and a backup pin is needed. J20 also allows the board to be powered from an external supply

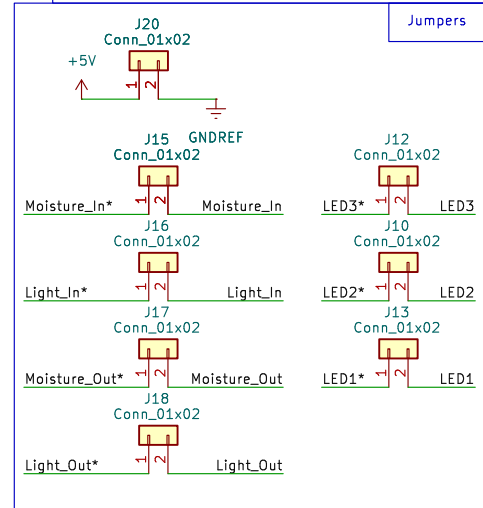

Connections to the microcontroller.

Additionally there is a pushbutton for debugging and a decoupling capacitor.

