




USB-C input

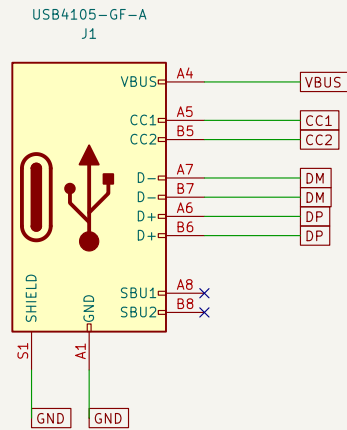

Independent sink resistors

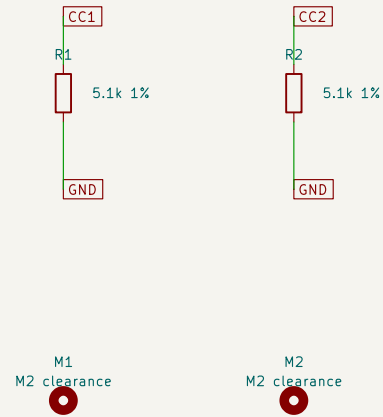

Harness to separate charger

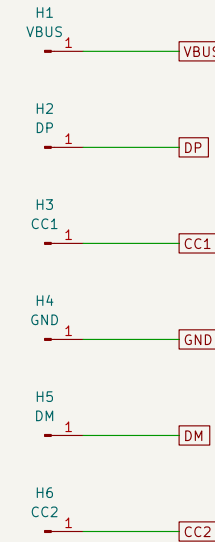

No battery connection here. VBUS target: 5 V from USB source.
A8/B8 intentionally NC. SHIELD is S1 on the GCT footprint.
CC sense at charger: high impedance, including while unpowered; no extra Rd.
DP/DM: source classification only. Available current must be detected.
Input protection, current limit, reverse blocking and 25 charger: separate board.

vea.raceremote

Sheet: /
File: usb-port.kicad_sch

Title: RaceRemote – passive USB-C charge port

Size: A4 Date: 2026-09-14

KiCad E.D.A. 10.0.6

Rev: 0.2

Id: 1/1