


USB-BC-01 v0.1 – PI3USB9201 candidate interface; source MCU still required

ADDR tied to GND: 7-bit address 0x5F (write 0xBE/read 0xBF on wire). Default ENB HIGH disables detector.
USB+/USB- are unused device-side pins. Physical connector uses D+/D- pins 8/7. Never join them to BQ25886 core.
INTB and read-to-clear status are events, not durable source permission. See README for initialization and fault contract.

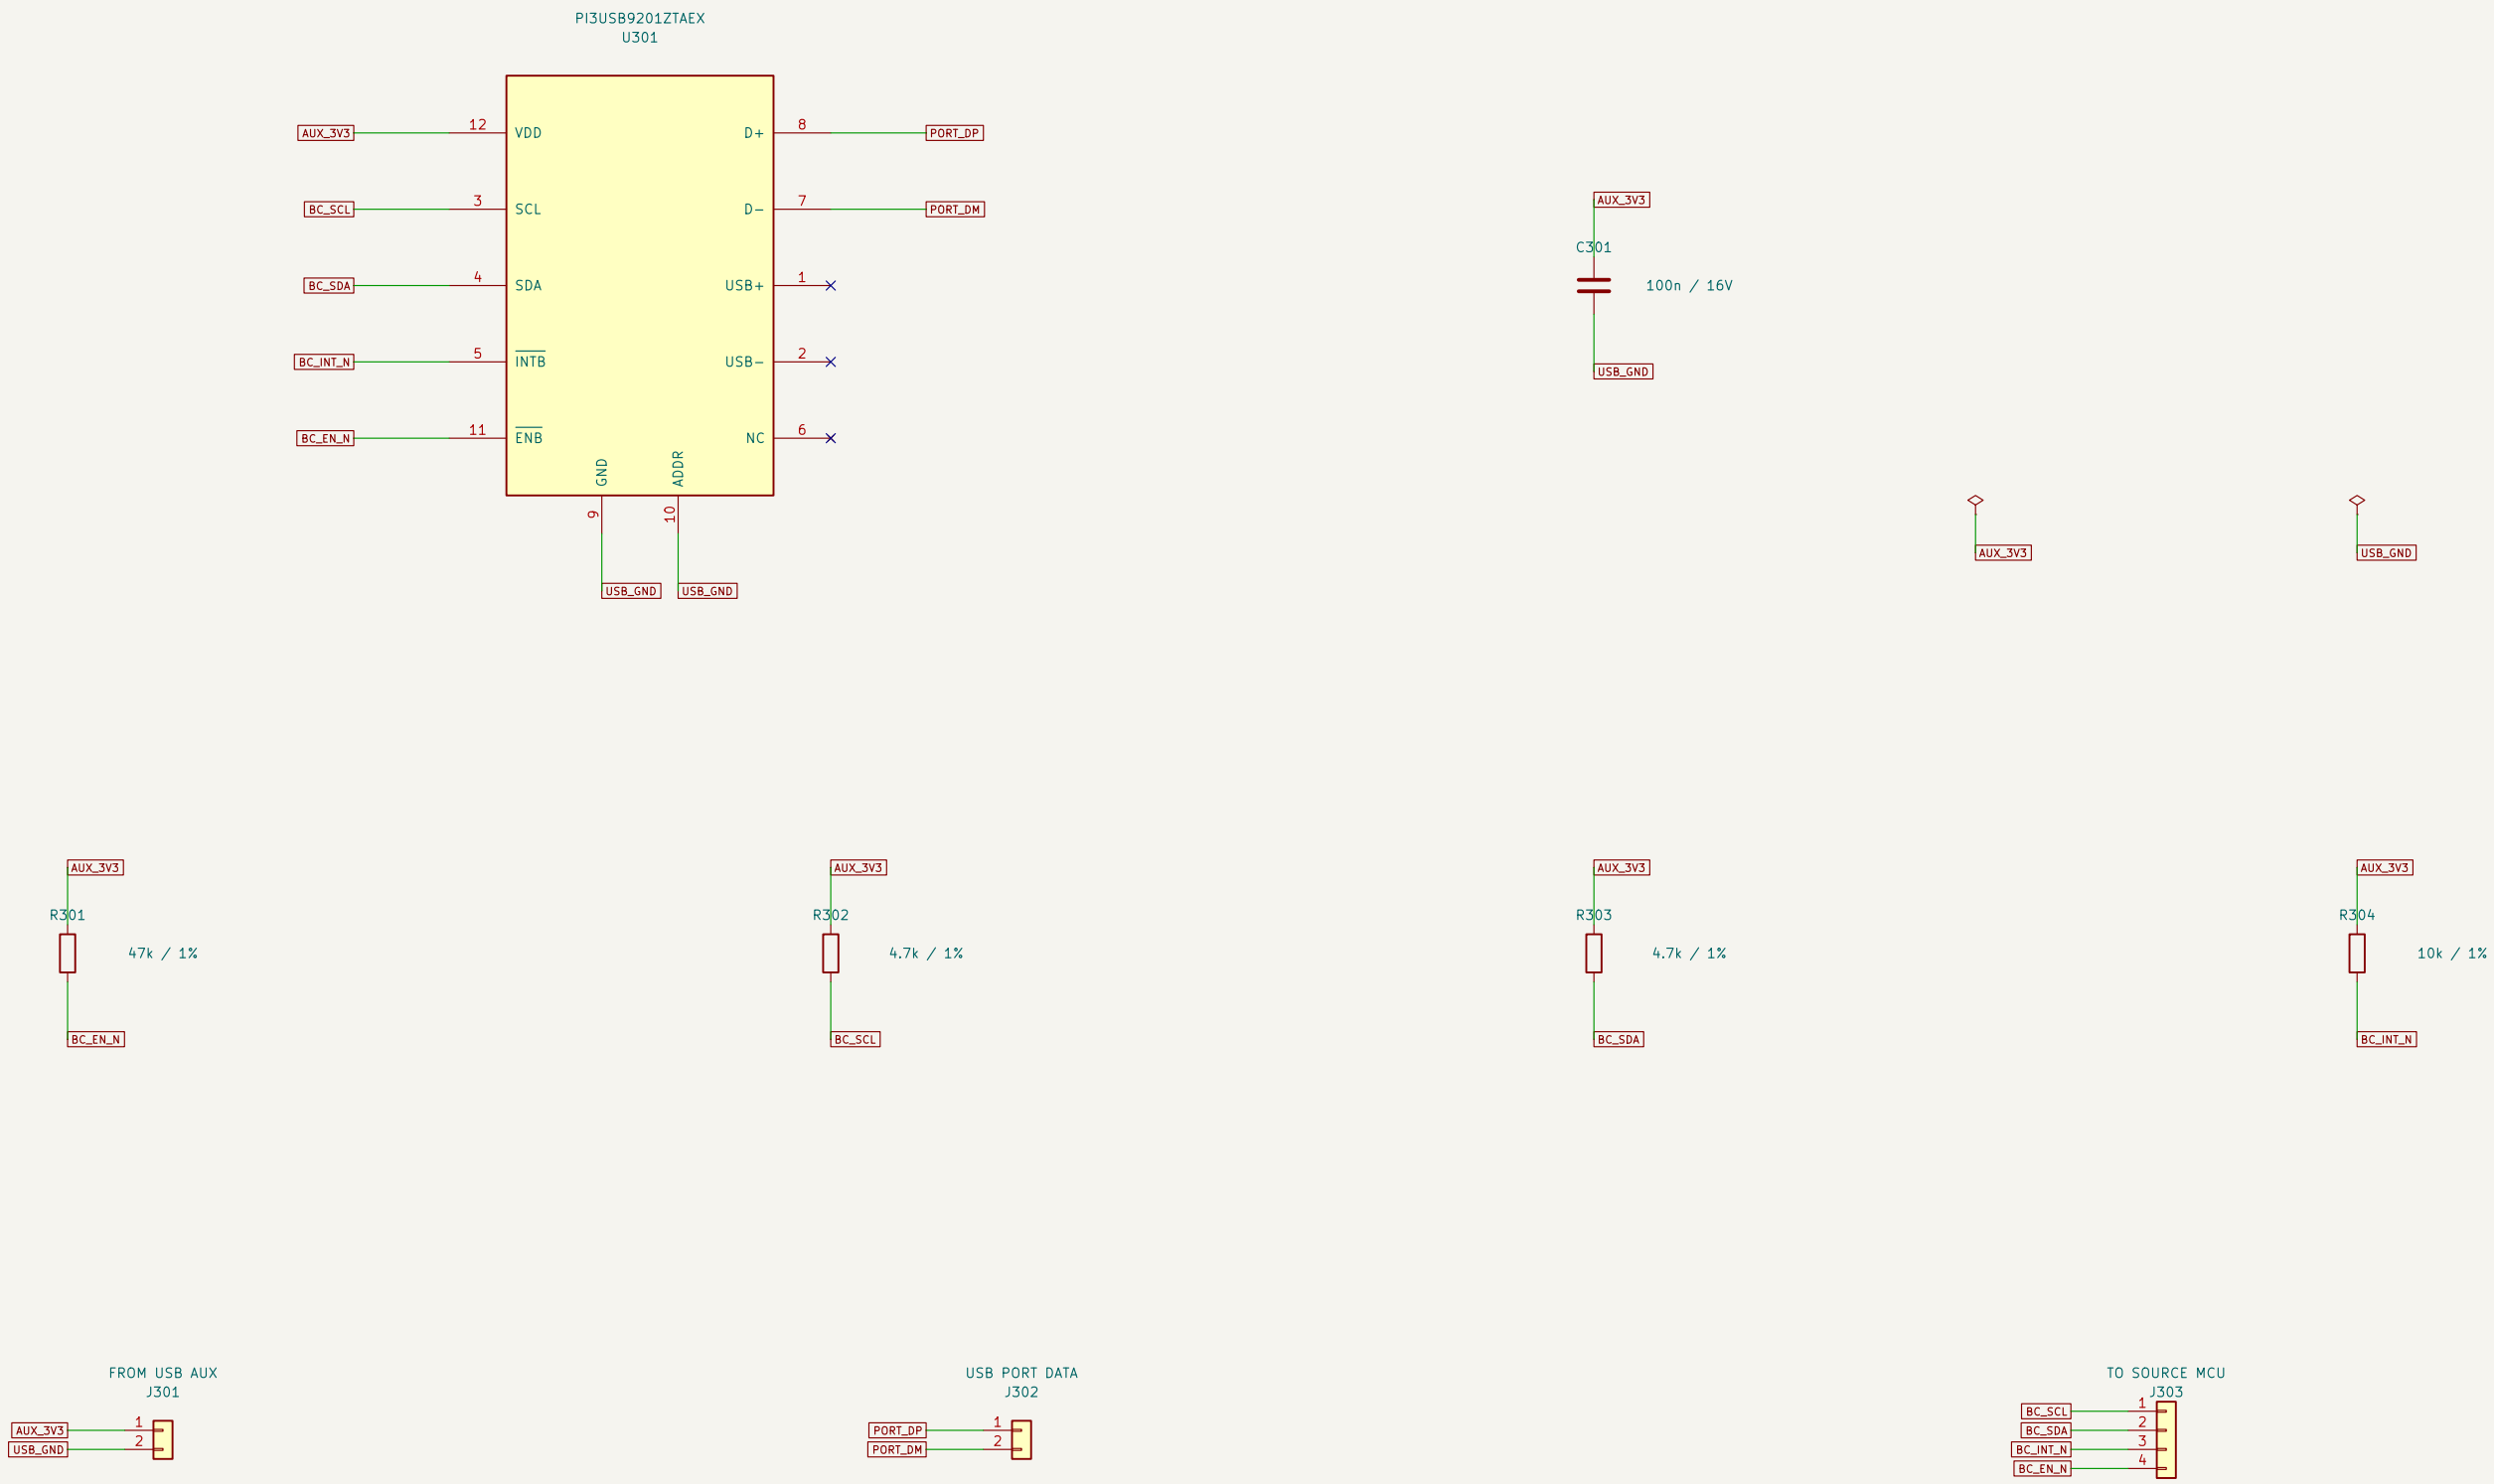

AUX: proposed 3.0..3.6V. 100kHz I2C requires measured bus capacitance/rise time. No second supply on AUX.
Schematic/ERC only: controller, CC detection, brownout/watchdog, ESD/layout and physical source tests are open.