


Converter core only – source qualification, cell monitor/balancer and protection are separate.

CE_N pulled high; default charge OFF. OTG tied low. VSET floating; nominal 8.4V.
250mA is a proposed bench setting; LW charge limits and cell pinout remain unverified.
No traction load on SYS_INTERNAL. Do not connect raw LW battery to this unfinished assembly.
R108 configures local DCP detection. J101 is POWER ONLY; source permission comes from the external gate.

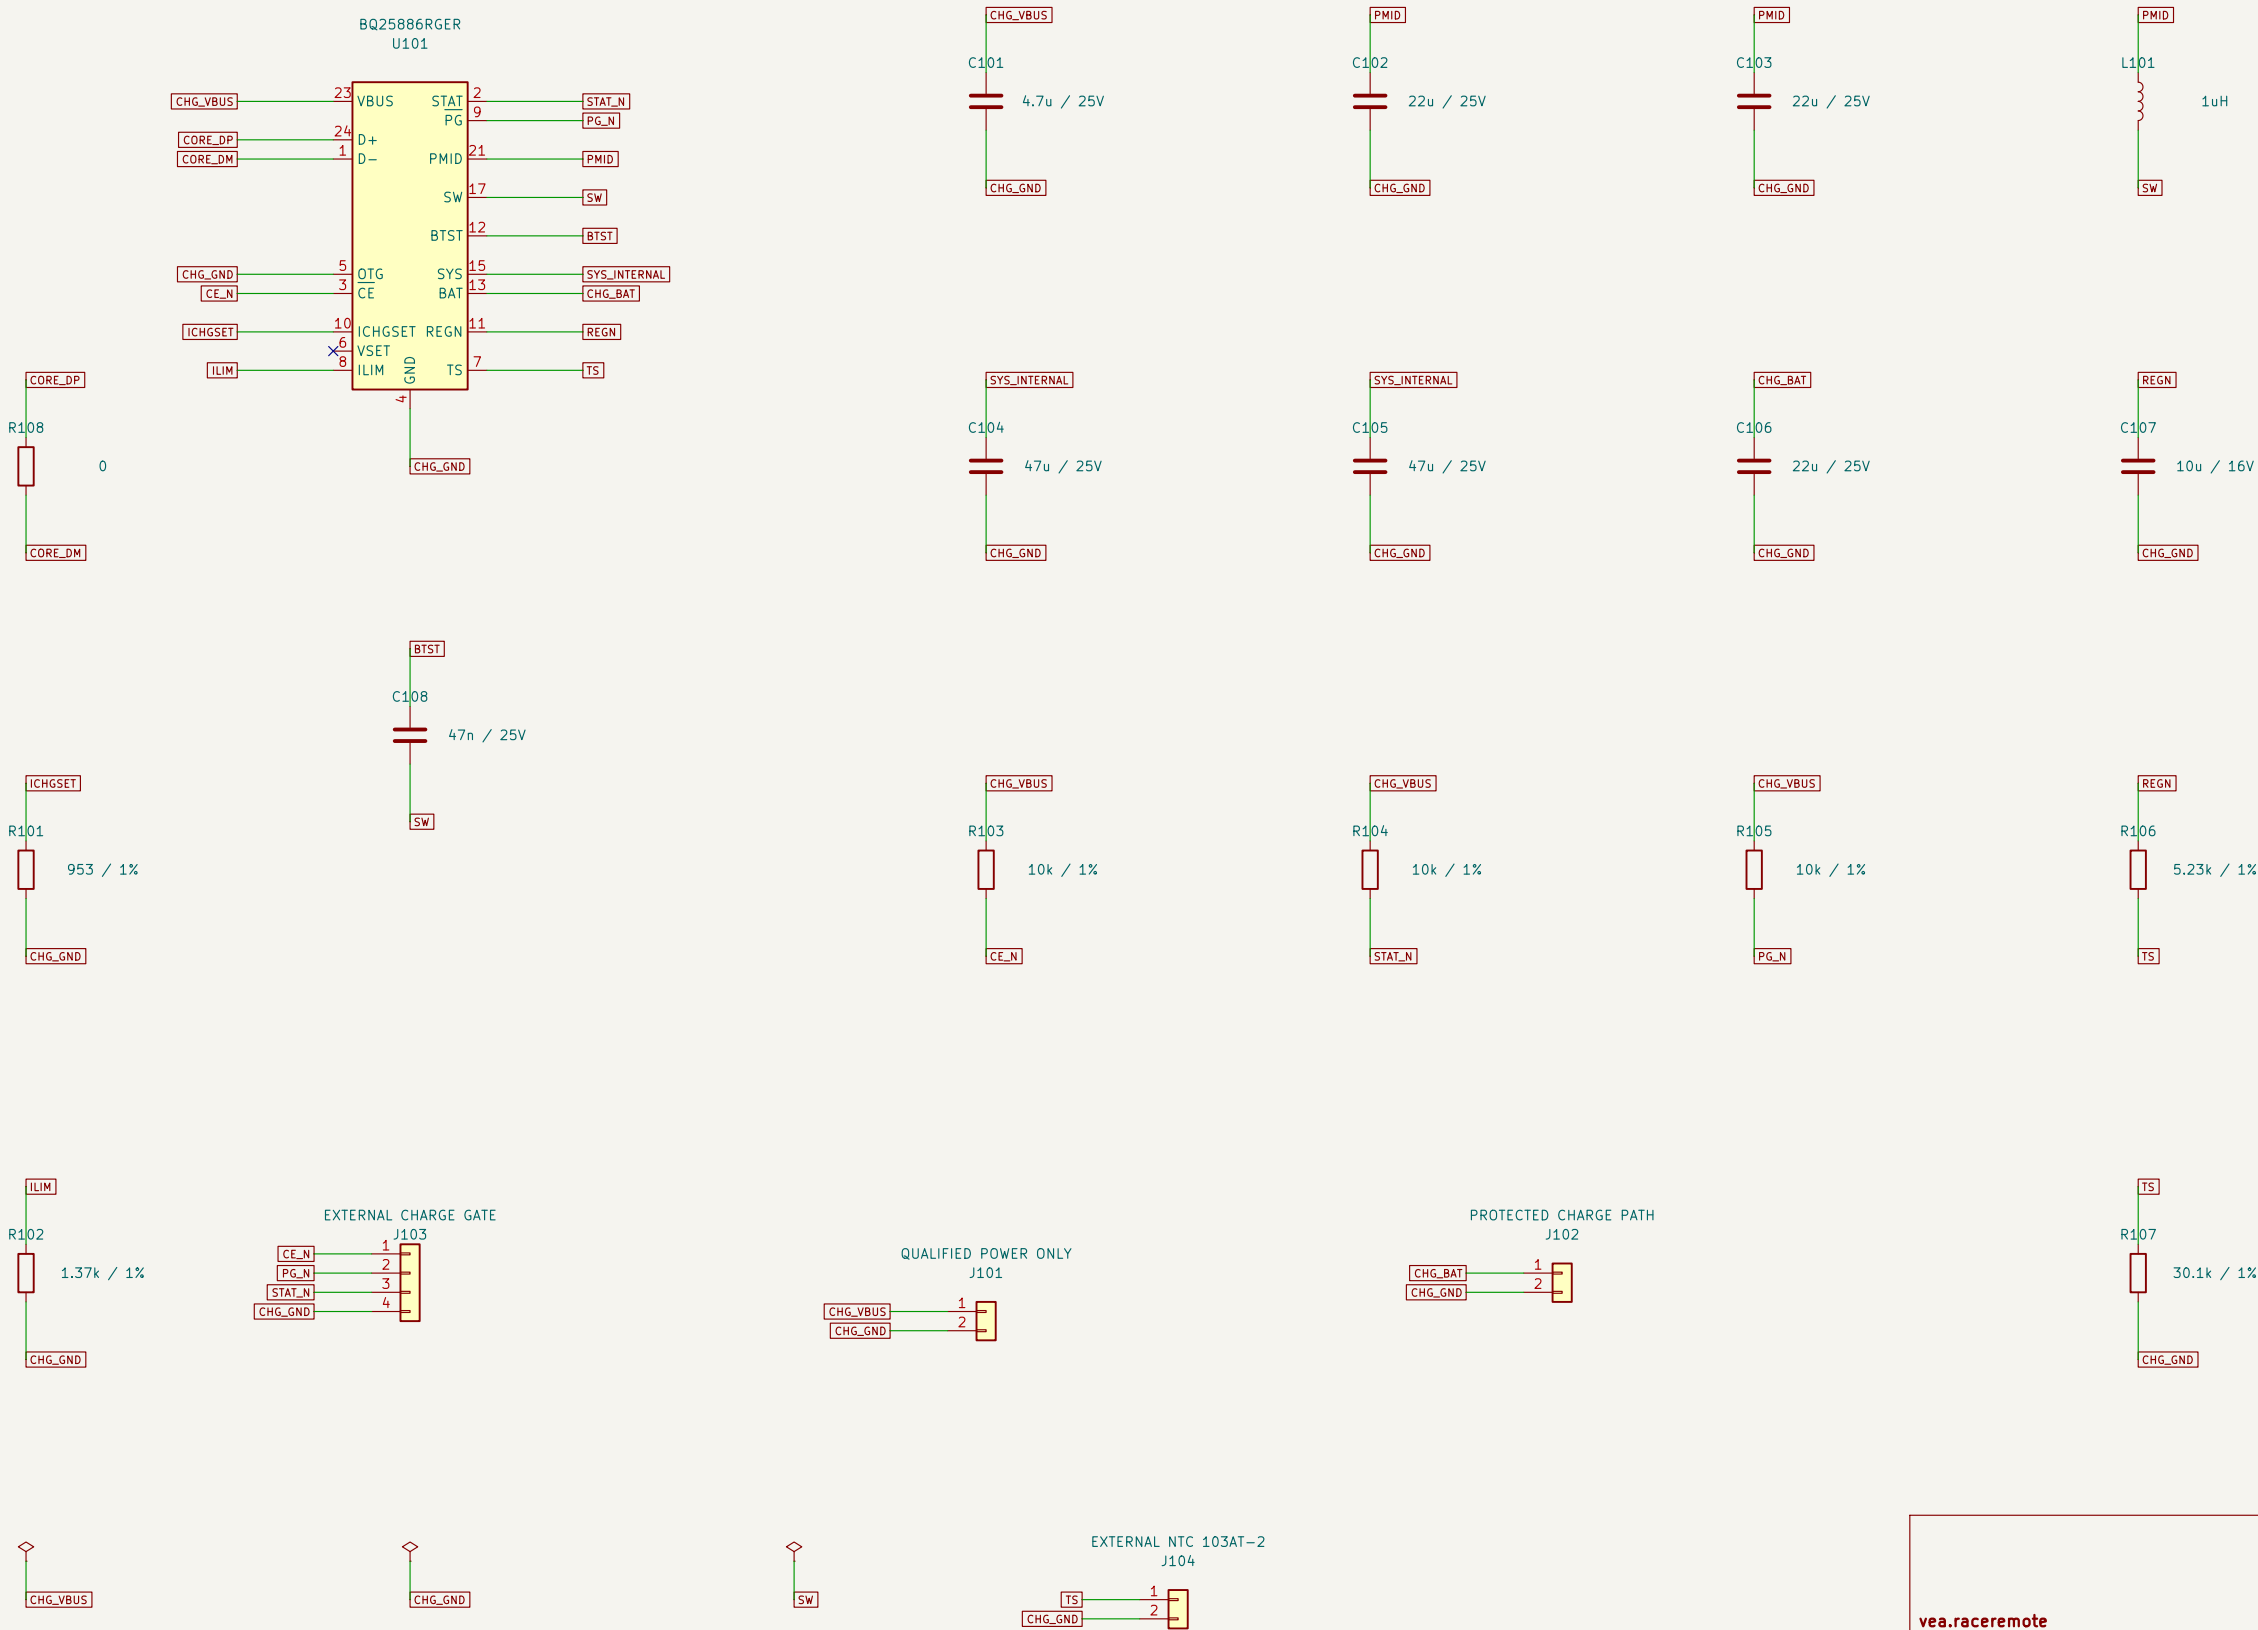

C104/C105: >=44uF effective total at operating voltage. Nominal values are placeholders for MPN selection.
Ground: short analog returns and power-pad star per Ti; high-current loops require PCB review.
Flags describe power connectivity for ERC; they do not implement source checks or reverse protection.

vea.raceremote		
Sheet: /		
File: charge-core.kicad_sch		
Title: RaceRemote – BQ25886 charger core PROPOSAL		
Size: A3	Date: 2026-09-14	Rev: 0.2
KiCad E.D.A. 10.0.6		Id: 1/1