


USB-INPUT-GATE-01 v0.2 – power switch and independent AUX supply

SOURCE_ALLOW must remain LOW until a >=1.5A source budget is verified. No SDP/unknown-source permission.
AUX_3V3 is now an OUTPUT from U202. Independent of main gate. Source policy and battery charge permit are external.
No PCB or hardware validation. This is not a complete 2S charger.

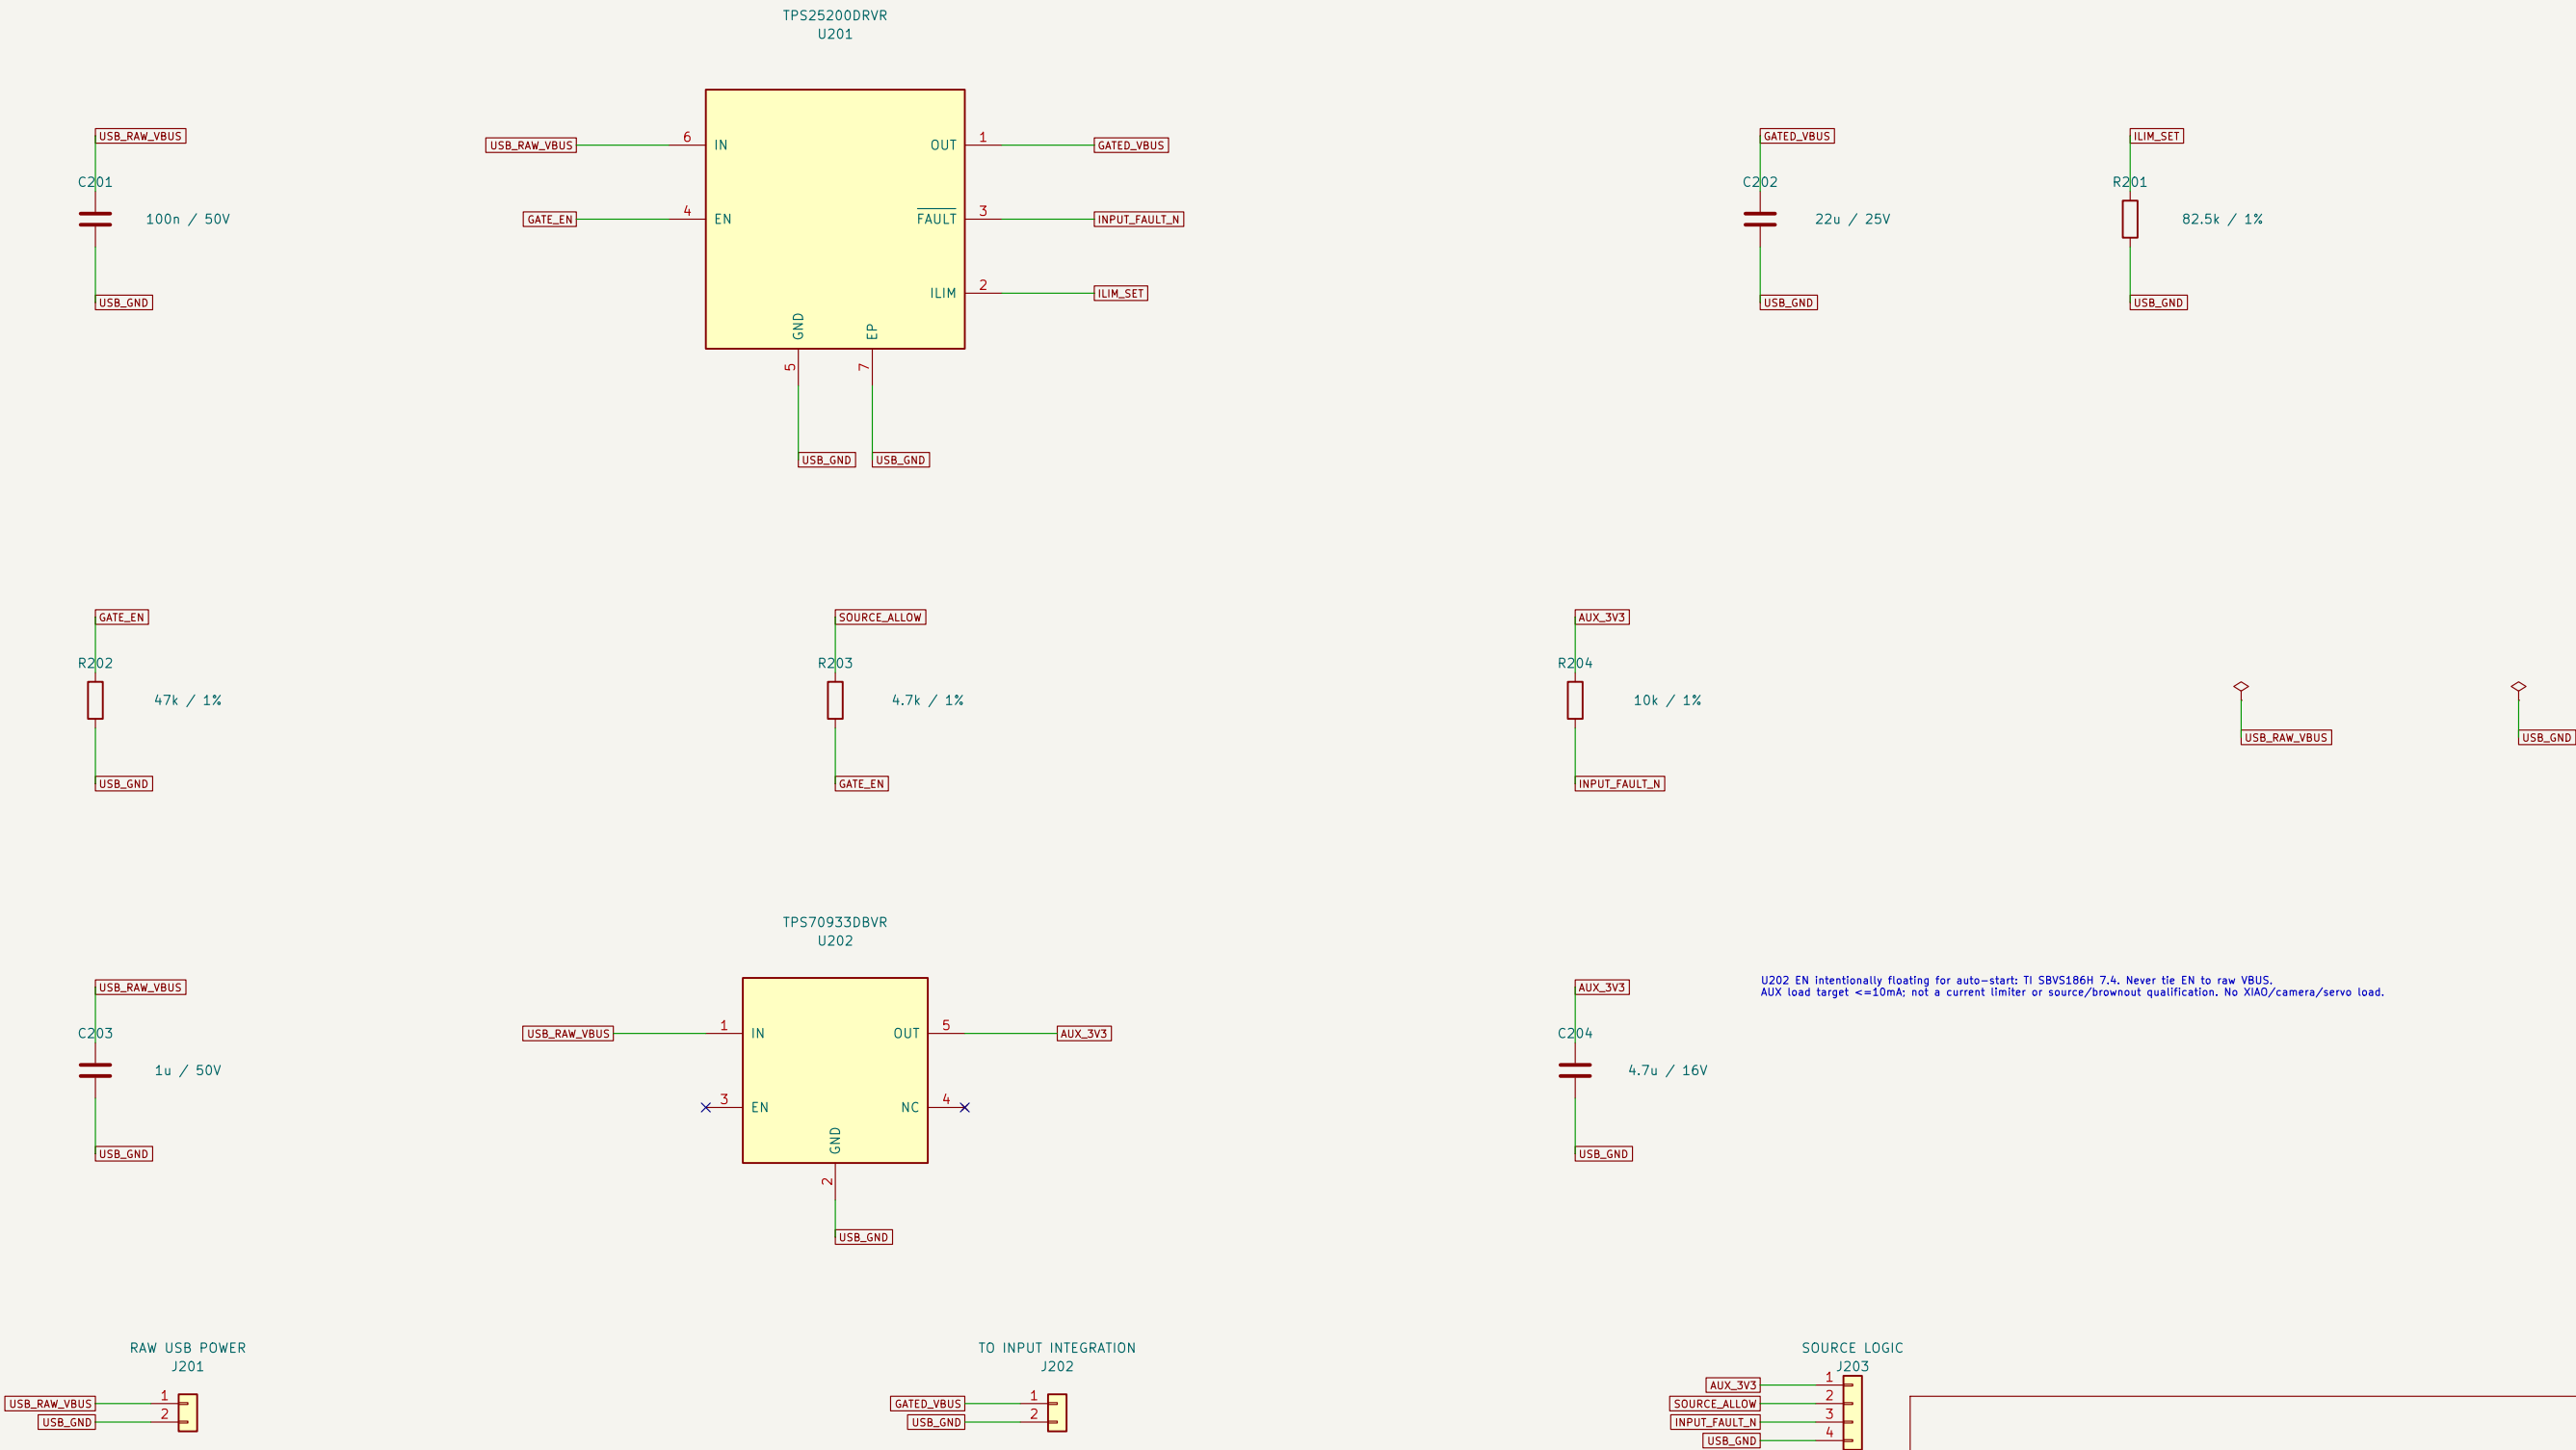

OFF discharges OUT internally; never backfeed from the 2S pack, traction or another USB supply.
5.5V clamp is conditional, NOT a universal transient ceiling; existing core contract ends at 5.5V.
EP shown as pin 7; connect to GND and verify thermal footprint before PCB layout.