
POWER IN / FUSES / PROTECTION / POWER LEDS


J2 BAT+ is the constant battery feed (7.5 A fuse at the battery). F1 5 A main, D1 TVS clamps spikes / blows F1 if reversed.

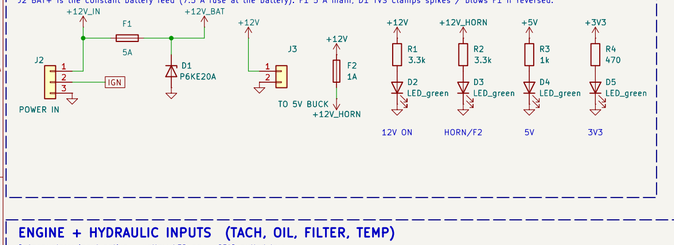



ENGINE + HYDRAULIC INPUTS (TACH, OIL, FILTER, TEMP)

Optocouplers: input active = yellow LED on = GPIO pulled low.
Filter + temp: monitored on the ADC with a 4.7k resistor AT THE SWITCH (1.65 V OK, 0 V closed, 3.3 V wire broken).

HIGH VOLTAGE – IGNITION COIL

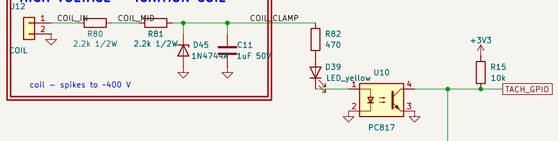


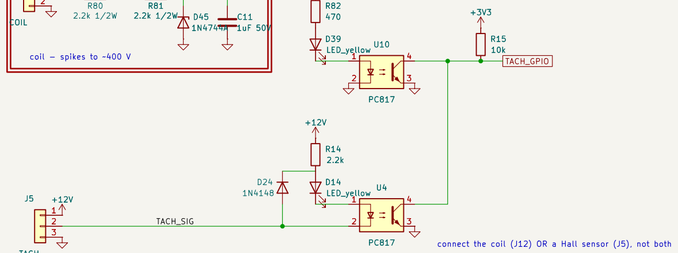


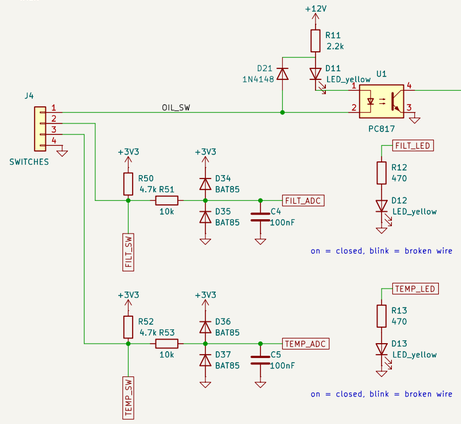

POWER HOLD


Q2 passes +12V_BAT to +12V while Q3 is on: key on (IGN) OR Pi HOLD high. Q4 cuts it: Pi KILL at the end of shutdown, or the U6 timer ~3 min after key-off. C7 stretches a cut to a few seconds.

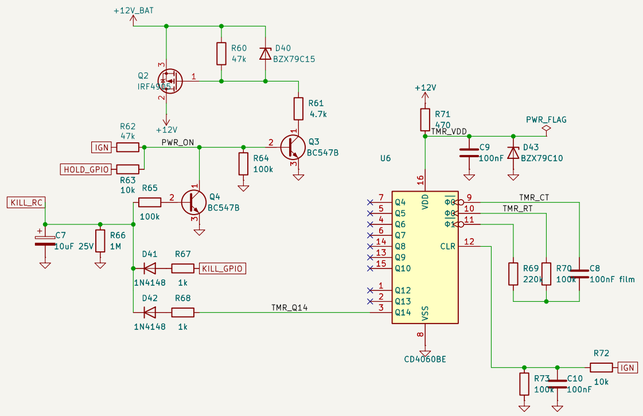




BATTERY / FUEL / BUTTON


ADC inputs clamp to 0..3.3 V. Fuel: A = sender only (JP1 1–2, JP2 on); B = gauge + dash (JP1 2–3, JP2 off).

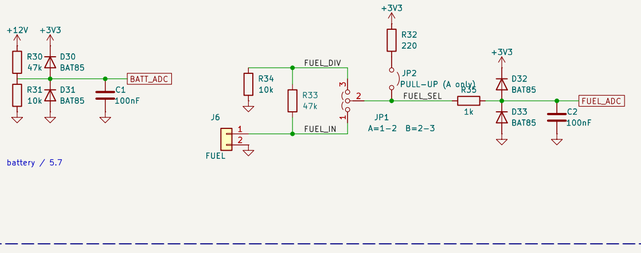




LIGHTS ON (light sensing)

Sense wires from the LAMP side of each light switch (a few mA; the lamps' own current never comes here).

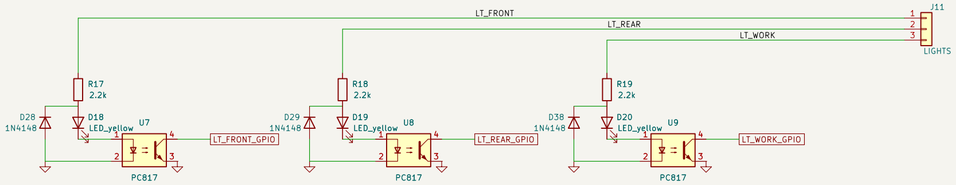


TEST POINTS

Same labels as the board silkscreen.



TILT SENSOR CONNECTOR (rev 2.6)


Latching Molex Micro-Fit 3.0, LSM6DSOX board on a short cable (under ~30–50 cm), on the same I2C bus as the ADS1115.



1 GND 2 3V3 3 SDA 4 SCL (cable soldered to the sensor board)


TEMPERATURE (rev 2.7)

1-Wire on GPIO 4. U11 measures the breakout box's air; J14 takes external DS18B20 probes (cab, outside). Several probes can share J14.




J14: 1 GND 2 DQ 3 3V3

TO RASPBERRY PI (40-pin ribbon, pin 1 to pin 1)



PLUG-IN MODULES

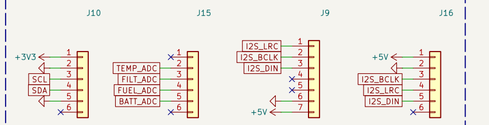


J10 + J15: ADS1115 (Adafruit 1085, two rows 12.7 mm apart)
J10 VIN GND SCL SDA ADDR ALRT; J15 A+ A3 A2 A1 A0 A–
A+ / A– are the module's own analog supply (outputs): left open
J9: MONO amp, Adafruit 3006 (LRC BCLK DIN GAIN SD GND VIN); J16: STEREO amp, Adafruit 6513
(VDD GND BCLK LRC DIN GAIN), Same signals: fit one amp only

Fuel mode: A = sender only: JP1 1–2, fit JP2. B = gauge + dash: JP1 2–3, JP2 off.
Oil + tach: +12V –> 2.2k –> yellow status LED –> PC817 LED –> sensor wire. Switch closes to chassis = LED on = GPIO low.
Filter + temp (monitored): fit a 4.7k resistor across each switch AT THE SWITCH. Wire reads ~1.65 V OK, ~0 V switch closed.
3.3 V wire broken (NO SIGNAL). Their LEDs are driven by the Pi.
F1: 5 A (Pi 4 or Pi 5). D1 (TVS) clamps spikes and blows F1 if power is connected backwards.
Power hold: +12V_IN is the CONSTANT battery feed. Q2 switches it to +12V while the key is on (IGN) or the Pi holds HOLD (GPIO26) high. At the end of shutdown the Pi raises KILL (GPIO16): Q4 cuts power. U6 cuts power ~3 min after key-off if the Pi never does. Key-off draw with everything off: under 0.1 mA.
Lights: sense wires from the LAMP side of each light switch (inline 1 A fuse at the tap). Light on = yellow LED on = GPIO low.
Tach: J12 COIL = ignition coil NEGATIVE terminal (spikes to ~400 V): R80+R81 –> 15 V zener + 1 uF –> PC817 U10.
U10 and U4 (Hall) share TACH_GPIO: connect the coil OR a Hall sensor, not both. 4-cyl coil: pulses_per_rev = 2.
Labels with the same name are connected (flag-shaped = between blocks). GND / +3V3 / +5V at the Pi header and modules are the same supplies as the ground and supply symbols.


HORN DRIVER

R21 keeps the horn off while the Pi boots.

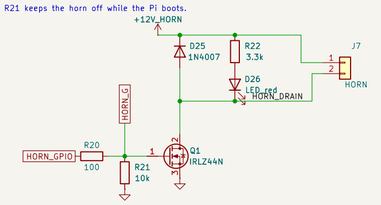

MOUNTING

H1–H4 corners, H15–H18 mid-sides, H19 centre. H5–H8: ADS1115, H9–H10: mono amp, H11–H14: stereo amp.



SUPPLY FLAGS (ERC only)

Supplies enter from the harness, the buck and the Pi.



Wired schematic: one box per circuit block, the same blocks as the board silkscreen
Harness breakout between the machine wiring and the Raspberry Pi

Sheet: /
File: bobcat-dash-breakout.kicad_sch

Title: Bobcat Digital Dash – Breakout Board

Size: A2	Date: 2026-10-22	Rev: 2.8
KiCad E.D.A. 10.0.7		Id: 1/1