
PS1 controller / memory card port pass-through + logic analyser tap

Pinout: psx-spx, docs/ps1/pinouts/controller-ports-and-memory-card-ports.md (master).
J1 = console side, J2 = device side, wired 1:1. Pin 10 carries the cable shield straight through.
Memory card slots have no IRQ (pin 8) and no shield; leave those wires unconnected.

Taps: signal lines through 100R (keeps analyser lead capacitance off the bus).
Supply rails through 10k, so a probe on a rail cannot short it.
Fit 0R in place of 100R for a transparent tap.

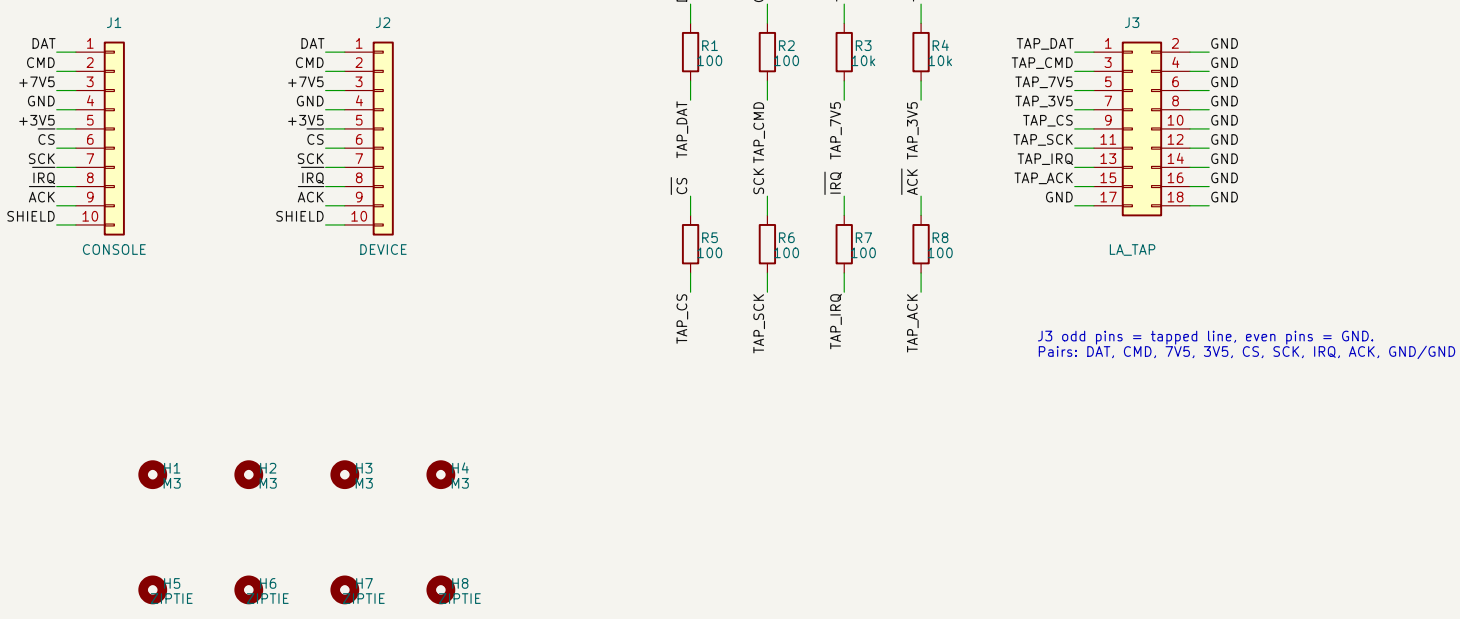

J3 odd pins = tapped line, even pins = GND.
Pairs: DAT, CMD, 7V5, 3V5, CS, SCK, IRQ, ACK, GND/GND

rixnobis
Sheet: /
File: ps1-port-tap.kicad_sch
Title: ps1-port-tap
Size: A4 | Date: | **Rev: A**
KiCad E.D.A. 10.0.7 | Id: 1/1