




Touch a flying wire to PAD1: the LED for its 8P8C pin lights. ULN2803A sinks each
LED pad at 5V through 1 kΩ and a wire grounded at the far end draws 5 mA, not a short.
A finger bridging pad and wire (~1 Mohm) holds the ULN input under 0.1 V, far below the
two-VBE turn-on, so only metal-to-metal contact lights an LED. Two shorted wires light two.





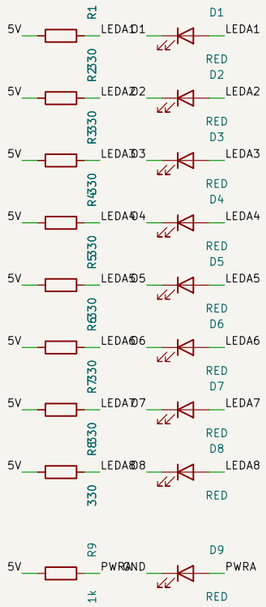

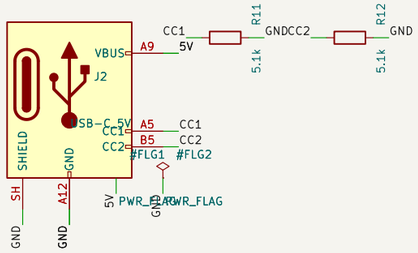





The RJ45 jack is the only through-hole part: an unshielded right-angle 8P8C on the
TE 5555164 / Amphenol 54602 land pattern, supplied and hand-soldered by the builder.
Everything else is SMD, JLC-assembled.

rixnobis		
Sheet: /		
File: rj45-mapper.kicad_sch		
Title: rj45-mapper		
Size: A3	Date:	**Rev: A**
KiCad E.D.A. 10.0.7		Id: 1/1