

1 USB-C INPUT, FUSE AND POWER SWITCH (5 V SINK, NO PD)

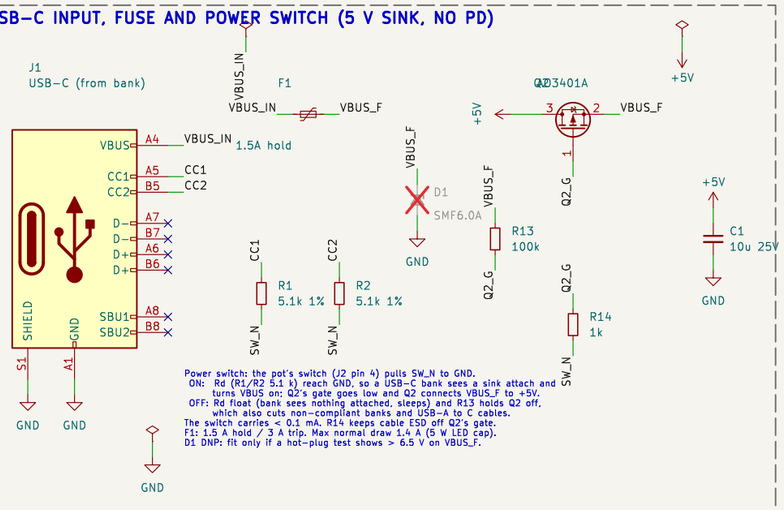


Power switch: the pot's switch (J2 pin 4) pulls SW_N to GND.
ON: R4 (R1/R2 5.1 k) reach GND, so a USB-C bank sees a sink attach and turns VBUS on; Q2's gate goes low and Q2 connects VBUS_F to +5V.
OFF: R4 float (bank sees nothing attached, sleeps) and R13 holds Q2 off, which also cuts non-compliant banks and USB-A to C cables.
The switch carries < 0.1 mA. R14 keeps cable ESD off Q2's gate.
F1: 1.5 A hold / 3 A trip. Max normal draw 1.4 A (5 W LED cap).
D1 DNP: fit only if a hot-plug test shows > 6.5 V on VBUS_F.

2 LED DRIVER: TPS61500 SEPIC (TI SLVA904), REGULATES 0.2 V ON FB

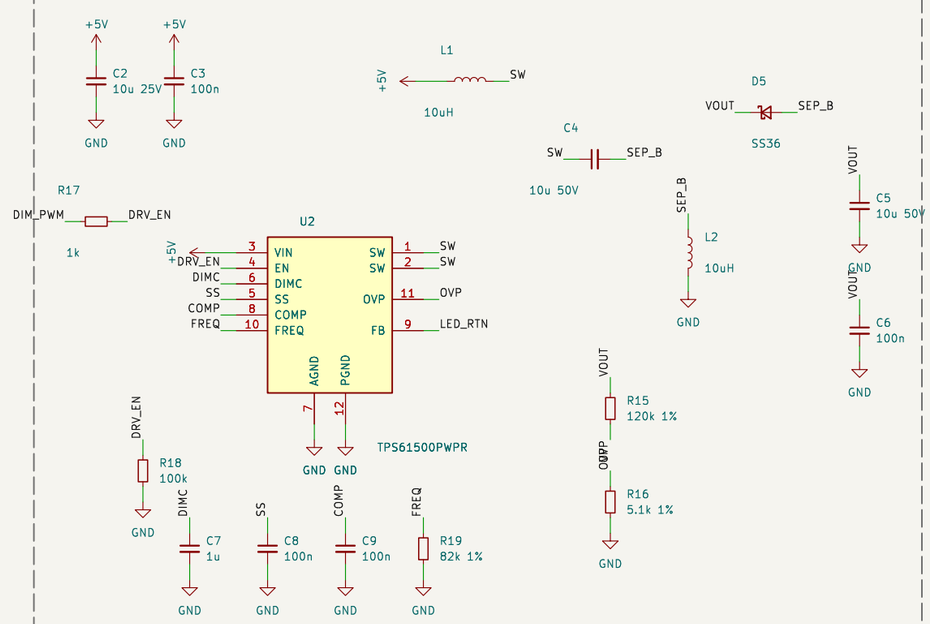

SEPIC: +5V -> L1 -> SW (switch) ; C4 couples SW to SEP_B ; L2 SEP_B -> GND ; D5 SEP_B -> VOUT. Works for any string from one 3 V filament (~2.7 V) to ~28 V, and C4 blocks DC: no current path from the bank to the LEDs when U2 is off.
f = 1.17 MHz (R19 82 k). OVP = 1.229 x (1 + 120k/5.1k) = 30.2 V; switch sees VIN + VOUT + VD < 36 V (40 V abs max). L1 = L2 = 10 uH, 4.1 A sat.
Dimming: 19.5 kHz PWM on EN, filtered inside U2 by DIMC (C7) -> analog FB reference. I_LED = duty x I_max. EN low > 10 ms = shutdown (2 uA). R18 holds EN low at boot.
COMP C9 100 nF. Lowest RHPZ 43 kHz (5 W into a 12 V string, 4.5 V in); keep crossover < 4.3 kHz. SLVA904 measured 1.7 kHz with 15 nF / 4.7 uH; 100 nF / 10 uH is lower still. Tune 15–470 nF on the bench. Checks: sepic_design.py (switch peak 2.2 A vs 3 A min).

3 FILAMENT PORTS: ONE SERIES STRING, PUSH-IN TERMINALS

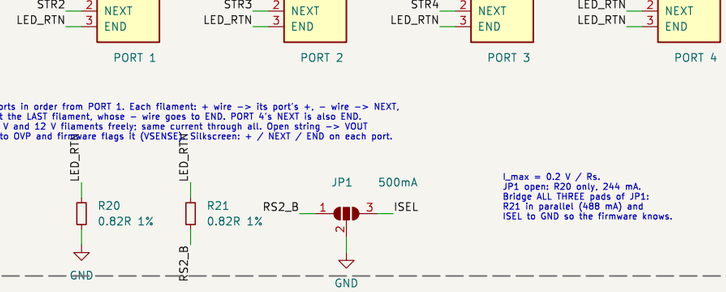

Fill ports in order from PORT 1. Each filament: + wire -> its port's +, - wire -> NEXT, except the LAST filament, whose - wire goes to END. PORT 4's NEXT is also END.
Mix 3 V and 12 V filaments freely: same current through all. Open string -> VOUT rises to OVP and firmware flags it (VSENSE). Silkscreen: + / NEXT / END on each port.

I_max = 0.2 V / Rs.
JP1 open: R20 only, 244 mA.
Bridge ALL THREE pads of JP1: R21 in parallel (488 mA) and ISEL to GND so the firmware knows.

NOTES


Power: 5 V from the bank via Q2. LED power capped at 5 W in firmware (~1.4 A from the bank): 1.7 W lit at prototype brightness; idle ~4 mA with keep-alive, ~0.7 mA without (model: power_model.py).

Pins (XIAO):
D1 GPIO3 ADC_POT ADC1_CH3
D2 GPIO4 VSENSE ADC1_CH4, VOUT / 13
D3 GPIO5 RADAR_OT2 wake, high = present
D4 GPIO6 UART_TX -> radar RX (115200 8N1)
D5 GPIO7 UART_RX <- radar OT1/TX
D6 GPIO21 ISEL_IO low = 500 mA jumper (via R22)
D7 GPIO20 DIM_PWM LEDC 19.5 kHz -> EN (analog dim)
D10 GPIO10 KA_DRV keep-alive gate

Assembly: JLCPCB fits everything incl. through-hole J2–J8 and the XIAO sockets: you plug in the XIAO and the radar. DNP: D1.


Bring-up (docs/g2_decisions.md): SEPIC at the extremes (one 3 V filament at 244 mA; ~28 V string at the 5 W cap), filament temperature in the frame, bank wake via the switch.

4 MCU: SEEED XIAO ESP32C3 IN 5 mm SOCKETS (bought with pins)

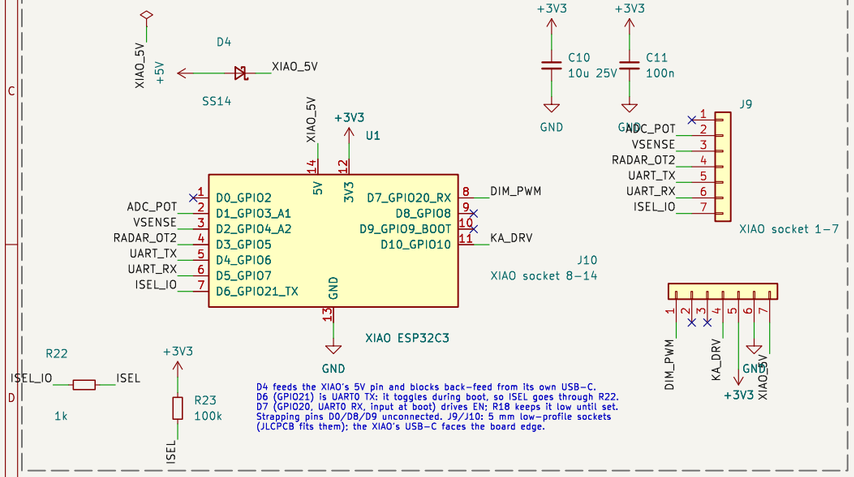


D4 feeds the XIAO's 5V pin and blocks back-feed from its own USB-C.
D6 (GPIO21) is UART0 TX: it toggles during boot, so ISEL goes through R22.
D7 (GPIO20, UART0 RX, input at boot) drives EN: R18 keeps it low until set.
Strapping pins D0/D8/D9 unconnected. J9/J10: 5 mm low-profile sockets (JLCPCB fits them); the XIAO's USB-C faces the board edge.

5 POT + POWER SWITCH, RADAR (SOCKET OR PIGTAIL)

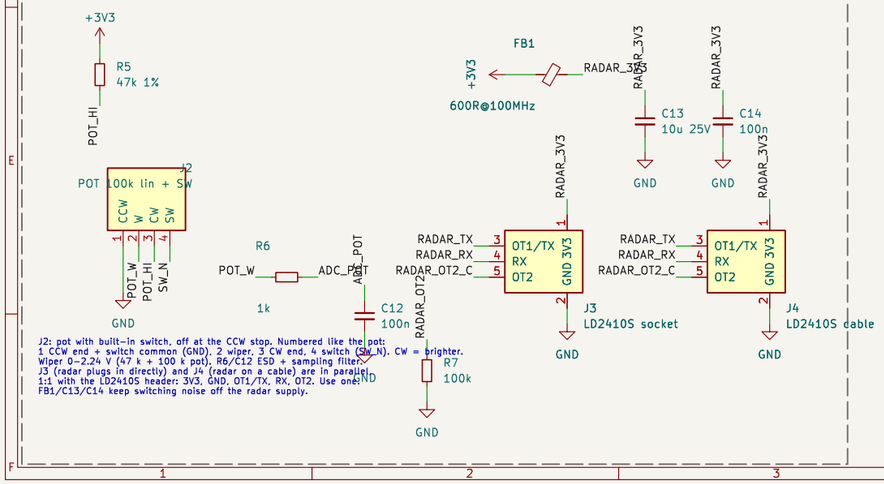


J2: pot with built-in switch, off at the CCW stop. Numbered like the pot:
1 CCW end + switch common (GND), 2 wiper, 3 CW end, 4 switch (SW_N). CW = brighter.
Wiper 0–2.24 V (47 k + 100 k pot); R6/C12 ESD + sampling filter.
J3 (radar plugs in directly) and J4 (radar on a cable) are in parallel, 1:1 with the LD2410S header: 3V3, GND, OT1/TX, RX, OT2. Use one.
FB1/C13/C14 keep switching noise off the radar supply.

6 STRING VOLTAGE SENSE, RADAR LINE RESISTORS

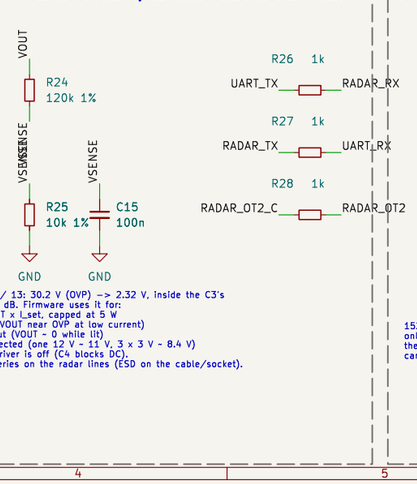



VSENSE = VOUT / 13: 30.2 V (OVP) -> 2.32 V, inside the C3's ADC range at 11 dB. Firmware uses it for:
- P_LED = VOUT x I_set, capped at 5 W
- open string (VOUT near OVP at low current)
- shorted output (VOUT ~ 0 while lit)
- what is connected (one 12 V - 11 V, 3 x 3 V - 8.4 V)
0 uA when the driver is off (C4 blocks DC).
R26–R28: 1 k series on the radar lines (ESD on the cable/socket).

7 BANK KEEP-ALIVE

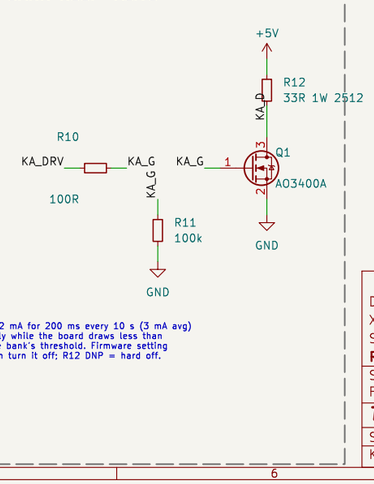

152 mA for 200 ms every 10 s (3 mA avg) only while the board draws less than the bank's threshold. Firmware setting can turn it off: R12 DNP = hard off.

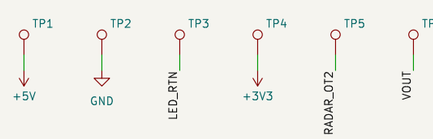

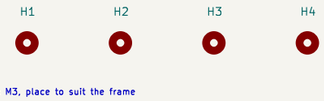

H1–H4: M3, place to suit the frame

Decisions: docs/g2_decisions.md. Values: hardware/tools/sepic_design.py
XIAO ESP32C3 (socketed), LD2410S radar (socket or pigtail), pot + power switch, keep-alive
Series filament string, TPS61500 SEPIC (TI SLVA904), 244/488 mA, 5 V USB-C input (no PD)

Rob Lim

Sheet: /
File: fgl_g2.kicad_sch

Title: Fused Glass Lighting controller

Size: A3	Date: 2026-10-23	**Rev: G2**
KiCad E.D.A. 9.0.7		Id: 1/1