E304 Energy and Energy Consumption

E3.4.1 Renewable and non-renewable energy sources

Renewable sources replenish on timescales comparable to human use, including solar, wind and hydropower. Non-renewable resources are finite and not quickly replaced, including coal, oil, natural gas and conventional nuclear fuels. Replenishment, not carbon emissions during generation, determines the classification. Nuclear power still uses finite fuel despite comparatively low operating carbon emissions.

Textbook sources: E304 · PDF 2

E3.4.2 · E3.4.3 Binding energy and mass defect

Binding energy is the energy required to separate a nucleus into non-interacting free nucleons. The corresponding energy is released when those nucleons form the nucleus. Their combined free mass exceeds the nuclear mass by the mass defect. Treat electrons consistently when using atomic masses; do not mix neutral-atom and bare-nucleus masses without correction.


$$\frac{E_b}{\mathrm{MeV}} \approx 931 \frac{\Delta m}{\mathrm{u}}$$

E_b: binding energy; Δm: mass of separated nucleons minus nuclear mass. 1 u corresponds to approximately 931 MeV/c².

Textbook sources: E304 · PDF 3, 4

E3.4.4 Components and circuits of a pressurised water reactor

Fission releases energy, control rods absorb neutrons to regulate the chain reaction, and high-pressure primary water carries heat and acts as coolant and moderator. Pressure keeps it liquid at high temperature. A steam generator transfers heat to a separate secondary circuit whose steam drives the turbine and generator. A condenser transfers waste heat to an external cooling circuit, condensing the steam for reuse. Circuits exchange heat without mixing water; distinguish slowing neutrons, absorbing neutrons and removing heat.

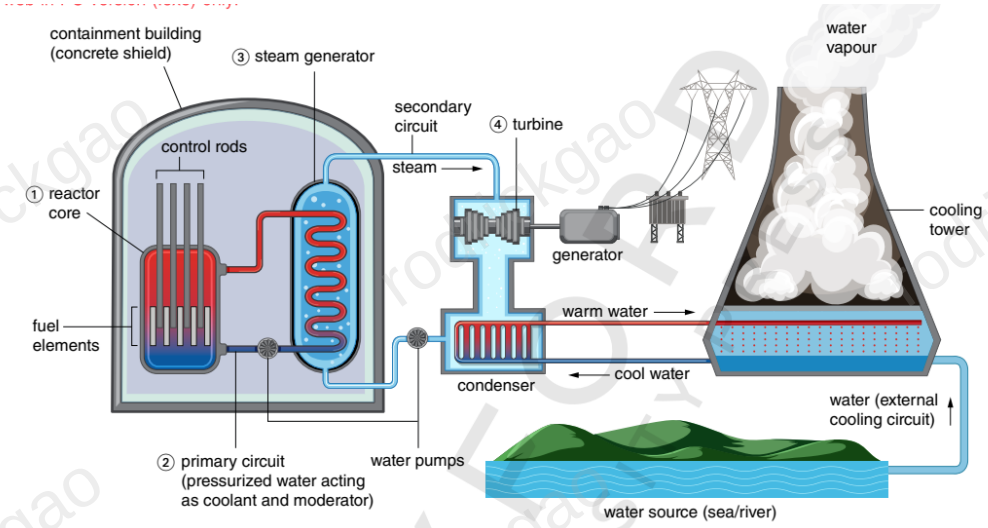

The primary, secondary and external cooling circuits of a pressurised water reactor.


Textbook sources: E304 · PDF 10

E3.4.5 Wind-turbine power

Wind carries kinetic energy through the rotor's swept area. Available kinetic-energy flux is proportional to air density, swept area and wind speed cubed; actual output also includes efficiency. Swept area is the circle covered by rotating blades, not their material area. With other conditions fixed, doubling speed increases this model's power eightfold.

$$P = \frac{1}{2}\eta\rho A v^3$$

Wind turbine output P (W); η: fractional efficiency; air density ρ (kg m⁻³); swept rotor area A (m²); wind speed v (m s⁻¹). Uniform wind through A.

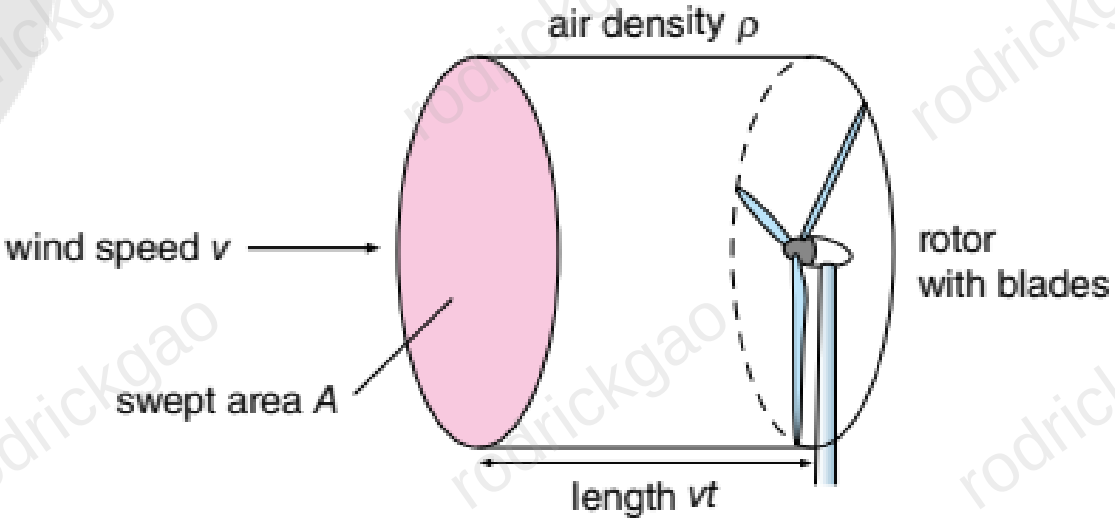

The air cylinder crossing the swept rotor area in a time interval has length equal to wind speed times time.


Textbook sources: E304 · PDF 14, 15

E3.4.6 Hydroelectric power

Falling water loses gravitational potential energy, part of which turbines and generators convert to electricity. Output power depends on mass flow per second, vertical head and efficiency. Convert volume flow rate to mass flow rate using water density. Head is the vertical height difference, not total pipe length.

$$P = \eta \frac{mgh}{t}$$

Hydroelectric output P (W); η: fractional efficiency; m/t: mass flow rate (kg s^{-1}); g: m s^{-2}; h: vertical head (m).

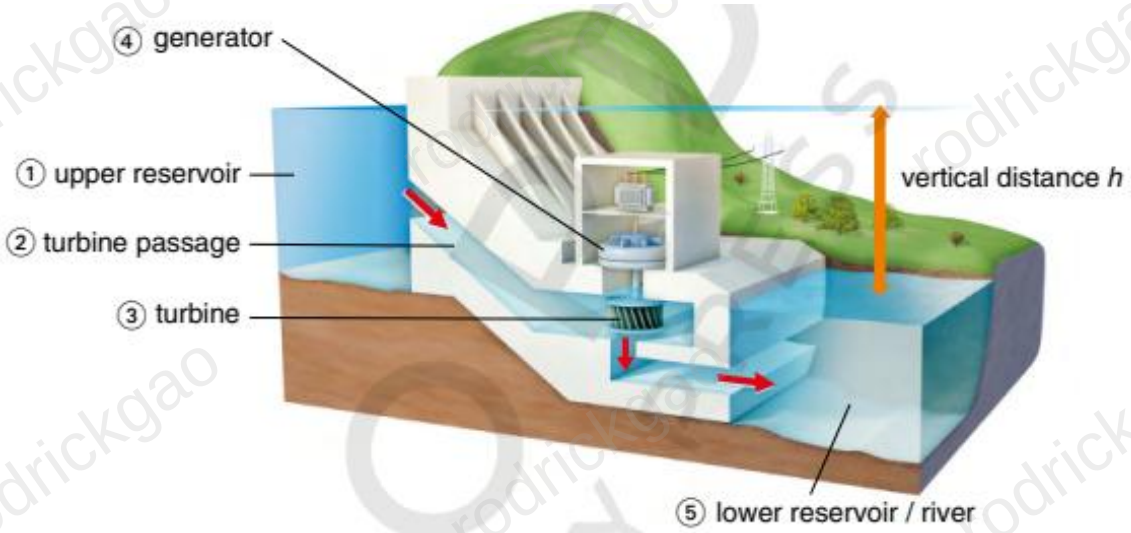

Water flows from the upper to lower reservoir, converting gravitational potential energy to electricity through a turbine and generator.

Textbook sources: E304 · PDF 18


E3.4.7 The solar constant

The solar constant is radiant power received per unit area perpendicular to sunlight, outside Earth's atmosphere at the mean Earth-Sun distance. It is a power density, not the Sun's total power or a value received everywhere at ground level. Atmospheric absorption, clouds and oblique incidence alter the actual received power.

Textbook sources: E304 · PDF 22

E3.4.8 Solar power and projected area

For sunlight intensity I measured perpendicular to its rays, a panel of area A intercepts projected area $A\cos\theta$, where θ is the angle from the panel normal. Incident power is $P = IA\cos\theta$, greatest at normal incidence when $\theta = 0$. If the angle is measured from the panel surface, use sine instead. If actual power per panel area is already given, multiply by A without another angle factor. Electrical output also includes conversion efficiency.

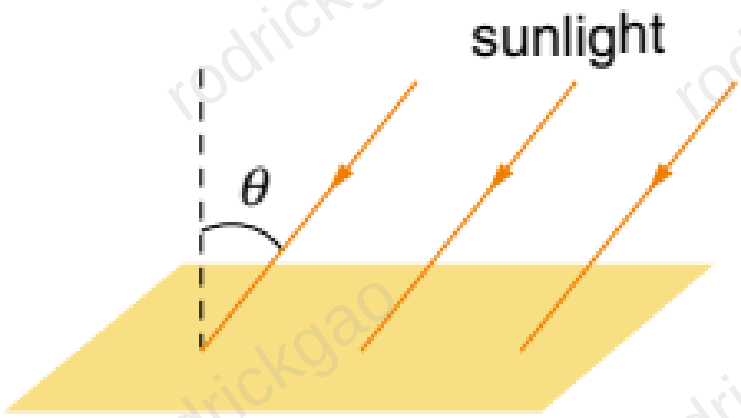


θ is measured between the light rays and the panel normal.

Textbook sources: E304 · PDF 22

E3.4.9 The photovoltaic effect in a solar cell

Incident light generates free electrons and holes near the junction. Its electric field separates them, moving electrons towards the n-side and holes towards the p-side. With a load connected, electrons flow through the external circuit; conventional current is opposite. Read field, electron-motion and current arrows separately to avoid reversing directions.

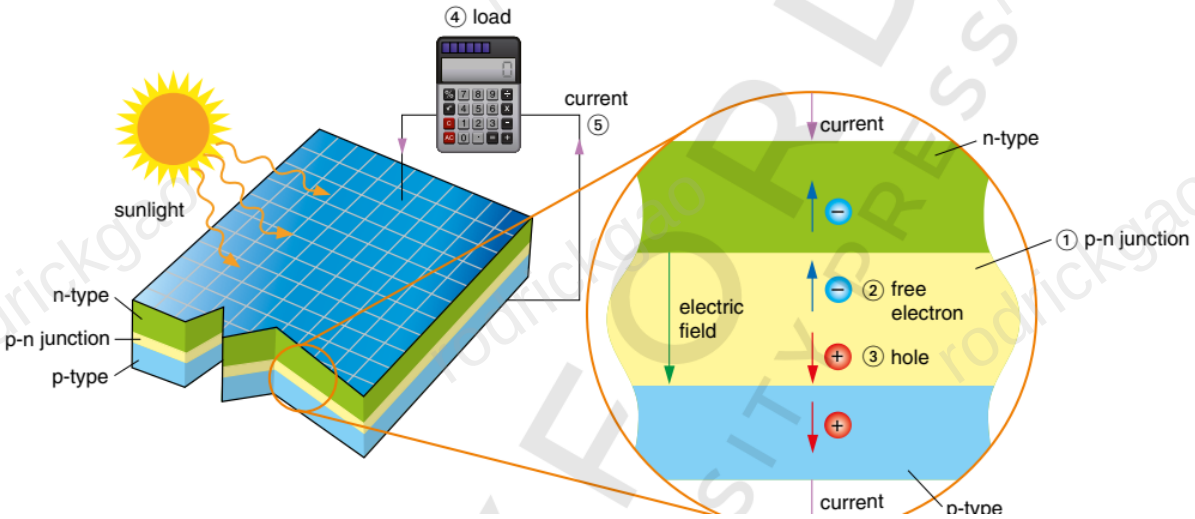

Electric field, electron motion and external conventional-current directions in a photovoltaic cell.

Textbook sources: E304 · PDF 27

E3.4.10 Anti-reflection films on solar panels

A transparent anti-reflection coating reduces reflected light, allowing more incident light into the cell for absorption and energy conversion. Reduced reflection also makes panels appear darker. Darkness is an observation; explain improved performance through reduced reflection and increased absorption rather than saying that darker colour alone is better.

Textbook sources: E304 · PDF 27

E3.4.11 The greenhouse effect

Shorter-wavelength solar radiation passes through the atmosphere and warms the surface. The surface emits longer-wavelength infrared radiation; greenhouse gases absorb and re-emit some in all directions, reducing direct surface energy loss to space and raising equilibrium temperature. The main mechanism is radiative exchange, not simply sealing air inside a glass-like enclosure.

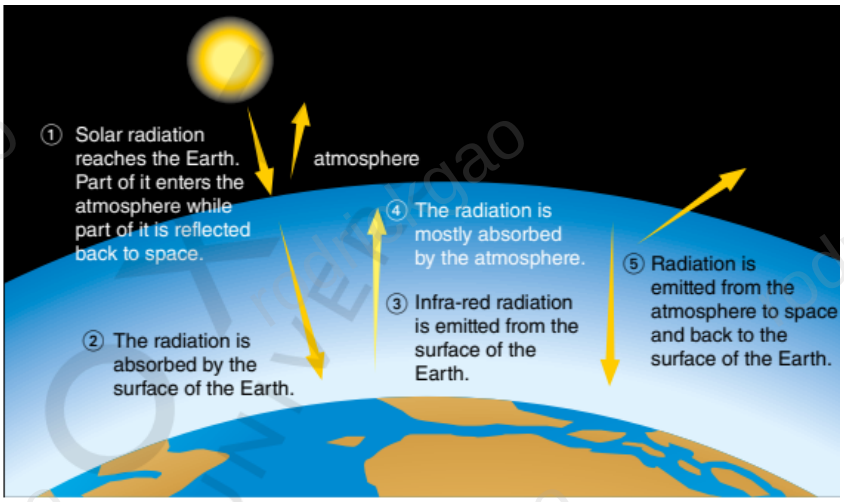


Fig 4.2b *Greenhouse effect.*

Short-wave sunlight and long-wave infrared radiation from Earth's surface follow different paths through the atmosphere.

Textbook sources: E304 · PDF 37