

Graduate Aptitude Test in Engineering 2021 13th Feb S2

Candidate ID	CS21S62017237
Candidate Name	ROHITBHAI RAMESHBHAI BHIMANI
Test Center Name	iON Digital Zone iDZ Unn
Test Date	13/02/2021
Test Time	3:00 PM - 6:00 PM
Subject	CS-2 Computer Science & Information Technology

Section : General Aptitude

- Q.1** Six students P, Q, R, S, T and U, with distinct heights, compare their heights and make the following observations.

Observation I: S is taller than R.

Observation II: Q is the shortest of all.

Observation III: U is taller than only one student.

Observation IV: T is taller than S but is not the tallest.


The number of students that are taller than R is the same as the number of students shorter than _____.

Options

1. P
2. T
3. R
4. S

Question Type : MCQ
Question ID : 8232513100
Status : Answered
Chosen Option : 4

Q.2

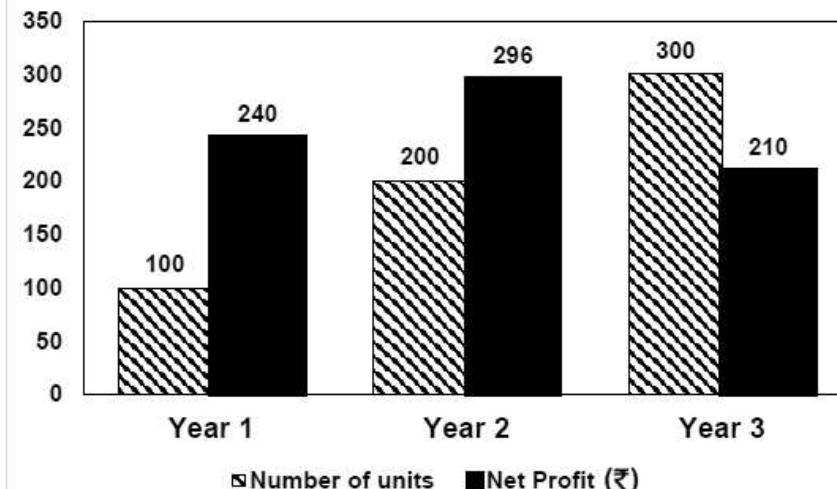

The number of units of a product sold in three different years and the respective net profits are presented in the figure above. The cost/unit in Year 3 was ₹ 1, which was half the cost/unit in Year 2. The cost/unit in Year 3 was one-third of the cost/unit in Year 1. Taxes were paid on the selling price at 10%, 13% and 15% respectively for the three years. Net profit is calculated as the difference between the selling price and the sum of cost and taxes paid in that year.

The ratio of the selling price in Year 2 to the selling price in Year 3 is _____.

- Options
1. 1:1
 2. 3:4
 3. 1:2
 4. 4:3

Question Type : MCQ
 Question ID : 8232513099
 Status : Answered
 Chosen Option : 4

Q.3 Gauri said that she can play the keyboard _____ her sister.

Options

1. as well as
2. as better as
3. as worse as
4. as nicest as

Question Type : MCQ

Question ID : 8232513091

Status : Answered

Chosen Option : 2

Q.4 The number of students in three classes is in the ratio 3:13:6. If 18 students are added to each class, the ratio changes to 15:35:21.

The total number of students in all the three classes in the beginning was:

Options

1. 88
2. 22
3. 66
4. 110


Question Type : MCQ

Question ID : 8232513098

Status : Answered




Chosen Option : 1

Q.5




A transparent square sheet shown above is folded along the dotted line. The folded sheet will look like _____.

Options



4.



Question Type : MCQ

Question ID : 8232513092

Status : Answered

Chosen Option : 2

Q.6

If $\left(x - \frac{1}{2}\right)^2 - \left(x - \frac{3}{2}\right)^2 = x + 2$, then the value of x is:

Options

1. 8
2. 6
3. 4
4. 2

Question Type : MCQ

Question ID : 8232513094

Status : Answered

Chosen Option : 3

Q.7

If θ is the angle, in degrees, between the longest diagonal of the cube and any one of the edges of the cube, then, $\cos \theta =$

Options

1. $\frac{1}{\sqrt{2}}$

2. $\frac{1}{2}$

3. $\frac{1}{\sqrt{3}}$

4. $\frac{\sqrt{3}}{2}$

Question Type : MCQ

Question ID : 8232513093

Status : Answered

Chosen Option : 1

Q.8 Pen : Write :: Knife : _____

Which one of the following options maintains a similar logical relation in the above?

Options

1. Blunt
2. Vegetables
3. Cut
4. Sharp

Question Type : MCQ

Question ID : 8232513095

Status : Answered

Chosen Option : 3

- Q.9** Listening to music during exercise improves exercise performance and reduces discomfort. Scientists researched whether listening to music while studying can help students learn better and the results were inconclusive. Students who needed external stimulation for studying fared worse while students who did not need any external stimulation benefited from music.

Which one of the following statements is the CORRECT inference of the above passage?

Options 1.

Listening to music has a clear positive effect on learning in all students. Music has a positive effect only in some students who exercise.

2.

Listening to music has no effect on learning and a positive effect on physical exercise.

3.

Listening to music has a clear positive effect both on physical exercise and on learning.

4.

Listening to music has a clear positive effect on physical exercise. Music has a positive effect on learning only in some students.


Question Type : MCQ

Question ID : 8232513096

Status : Answered

Chosen Option : 4


Q.10



A jigsaw puzzle has 2 pieces. One of the pieces is shown above. Which one of the given options for the missing piece when assembled will form a rectangle? The piece can be moved, rotated or flipped to assemble with the above piece.

Options

- 1.
- 2.
- 3.

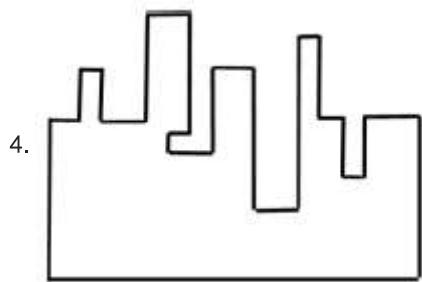

Question Type : MCQ

Question ID : 8232513097

Status : Answered

Chosen Option : 4

Section : CS Computer Science & Information Technology

- Q.1** If the numerical value of a 2-byte unsigned integer on a little endian computer is 255 more than that on a big endian computer, which of the following choices represent(s) the unsigned integer on a little endian computer?

Options

1. 0x0001
2. 0x6665
3. 0x0100
4. 0x4243

Question Type : MSQ

Question ID : 8232513144

Status : Answered

Chosen Option : 1,3

Q.2 If x and y are two decimal digits and $(0.1101)_2 = (0.8xy5)_{10}$, the decimal value of $x + y$ is _____.

Given 3

Answer :

Question Type : NAT

Question ID : 8232513118

Status : Answered

Q.3 Consider the following augmented grammar with $\{\#, @, <, >, a, b, c\}$ as the set of terminals.

$$\begin{aligned} S' &\rightarrow S \\ S &\rightarrow S \# c S \\ S &\rightarrow S S \\ S &\rightarrow S @ \\ S &\rightarrow < S > \\ S &\rightarrow a \\ S &\rightarrow b \\ S &\rightarrow c \end{aligned}$$

Let $I_0 = \text{CLOSURE}(\{S' \rightarrow \bullet S\})$. The number of items in the set $\text{GOTO}(\text{GOTO}(I_0, <), <)$ is _____.

Given --

Answer :

Question Type : NAT

Question ID : 8232513151

Status : Not Answered

- Q.4** The relation scheme given below is used to store information about the employees of a company, where `empId` is the key and `deptId` indicates the department to which the employee is assigned. Each employee is assigned to exactly one department.

```
emp(empId, name, gender, salary, deptId)
```

Consider the following SQL query:

```
select deptId, count(*)
from emp
where gender = "female" and salary > (select avg(salary) from emp)
group by deptId;
```

The above query gives, for each department in the company, the number of female employees whose salary is greater than the average salary of

Options

1. female employees in the department.
2. employees in the company.
3. female employees in the company.
4. employees in the department.


Question Type : MCQ

Question ID : 8232513131

Status : Marked For Review

Chosen Option : 2

- Q.5** Consider a three-level page table to translate a 39-bit virtual address to a physical address as shown below.

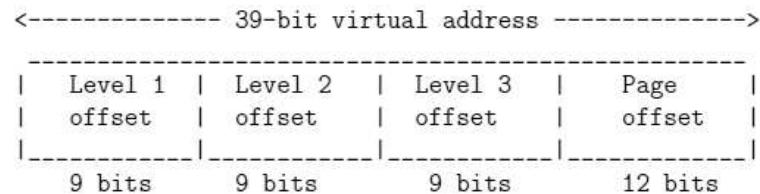

The page size is 4KB ($1\text{KB} = 2^{10}$ bytes) and page table entry size at every level is 8 bytes. A process P is currently using 2GB ($1\text{GB} = 2^{30}$ bytes) virtual memory which is mapped to 2GB of physical memory. The minimum amount of memory required for the page table of P across all levels is _____ KB.

Given 2

Answer :

Question Type : NAT

Question ID : 8232513148

Status : Answered

Q.6 Consider the following ANSI C function:

```
int SomeFunction(int x, int y)
{
    if ((x == 1) || (y == 1)) return 1;
    if (x == y) return x;
    if (x > y) return SomeFunction(x - y, y);
    if (y > x) return SomeFunction(x, y - x);
}
```

The value returned by `SomeFunction(15, 255)` is _____.

Given 15

Answer :

Question Type : NAT

Question ID : 8232513123

Status : Answered

Q.7

Consider a computer system with DMA support. The DMA module is transferring one 8-bit character in one CPU cycle from a device to memory through *cycle stealing* at regular intervals. Consider a 2 MHz processor. If 0.5% processor cycles are used for DMA, the data transfer rate of the device is _____ bits per second.

Given 4

Answer :

Question Type : NAT

Question ID : 8232513120

Status : Answered

Q.8 Consider a Boolean function $f(w, x, y, z)$ such that

$$f(w, 0, 0, z) = 1$$

$$f(1, x, 1, z) = x + z$$

$$f(w, 1, y, z) = wz + y$$

The number of literals in the minimal sum-of-products expression of f is
_____.

Given 9

Answer :

Question Type : NAT

Question ID : 8232513152

Status : Answered

Q.9

Consider the following multi-threaded code segment (in a mix of C and pseudo-code), invoked by two processes P1 and P2, and each of the processes spawns two threads T1 and T2:

```
int x = 0; // global
Lock L1; // global
main() {
    create a thread to execute foo(); // Thread T1
    create a thread to execute foo(); // Thread T2
    wait for the two threads to finish execution;
    print (x);}

foo() {
    int y = 0;
    Acquire L1;
    x = x + 1;
    y = y + 1;
    Release L1;
    print (y);}
```

Which of the following statement(s) is/are correct?

Options

1. Both P1 and P2 will print the value of x as 2.
 2. At least one of P1 and P2 will print the value of x as 4.
 3. At least one of the threads will print the value of y as 2.
 - 4.
- Both T1 and T2, in both the processes, will print the value of y as 1.

Question Type : **MSQ**

Question ID : **8232513142**

Status : **Answered**

Chosen Option : **1,4**

- Q.10** Consider the following ANSI C program:

```
#include <stdio.h>
#include <stdlib.h>
struct Node{
    int value;
    struct Node *next;};
int main(){
    struct Node *boxE, *head, *boxN; int index = 0;
    boxE = head = (struct Node *) malloc(sizeof(struct Node));
    head->value = index;
    for (index = 1; index <= 3; index++){
        boxN = (struct Node *) malloc(sizeof(struct Node));
        boxE->next = boxN;
        boxN->value = index;
        boxE = boxN; }
    for (index = 0; index <= 3; index++) {
        printf("Value at index %d is %d\n", index, head->value);
        head = head->next;
        printf("Value at index %d is %d\n", index+1, head->value); } }
```

Which one of the statements below is correct about the program?

Options 1.

- 1. It dereferences an uninitialized pointer that may result in a run-time error.
- 2. It has a missing `return` which will be reported as an error by the compiler.
- 3. Upon execution, the program creates a linked-list of five nodes.
- 4. Upon execution, the program goes into an infinite loop.

Question Type : MCQ
Question ID : 8232513135
Status : Answered
Chosen Option : 2

- Q.11** Consider a computer system with multiple shared resource types, with one instance per resource type. Each instance can be owned by only one process at a time. Owning and freeing of resources are done by holding a global lock (L). The following scheme is used to own a resource instance :

```
function OWNRESOURCE(Resource R)
    Acquire lock L // a global lock
    if R is available then
        Acquire R
        Release lock L
    else
        if R is owned by another process P then
            Terminate P, after releasing all resources owned by P
            Acquire R
            Restart P
            Release lock L
        end if
    end if
end function
```

Which of the following choice(s) about the above scheme is/are correct?

Options

1. The scheme may lead to live-lock.
2. The scheme may lead to starvation.
3. The scheme ensures that deadlocks will not occur.
4. The scheme violates the mutual exclusion property.

Question Type : **MSQ**

Question ID : **8232513143**

Status : **Answered**

Chosen Option : **2,3,4**

Q.12

Let $L \subseteq \{0, 1\}^*$ be an arbitrary regular language accepted by a minimal DFA with k states. Which one of the following languages must necessarily be accepted by a minimal DFA with k states?

Options

1. $\{0, 1\}^* - L$
2. $L \cup \{01\}$
3. $L \cdot L$
4. $L - \{01\}$

Question Type : MCQ

Question ID : 8232513109

Status : Not Answered

Chosen Option : --

Q.13

Consider a complete binary tree with 7 nodes. Let A denote the set of first 3 elements obtained by performing Breadth-First Search (BFS) starting from the root. Let B denote the set of first 3 elements obtained by performing Depth-First Search (DFS) starting from the root.

The value of $|A - B|$ is _____.

Given 4

Answer :

Question Type : NAT

Question ID : 8232513116

Status : Answered

Q.14

Suppose that $f: \mathbb{R} \rightarrow \mathbb{R}$ is a continuous function on the interval $[-3, 3]$ and a differentiable function in the interval $(-3, 3)$ such that for every x in the interval, $f'(x) \leq 2$. If $f(-3) = 7$, then $f(3)$ is at most _____.

Given 2

Answer :


Question Type : NAT

Question ID : 8232513125

Status : Marked For Review

Q.15

In a directed acyclic graph with a source vertex s , the *quality-score* of a directed path is defined to be the product of the weights of the edges on the path. Further, for a vertex v other than s , the quality-score of v is defined to be the maximum among the quality-scores of all the paths from s to v . The quality-score of s is assumed to be 1.

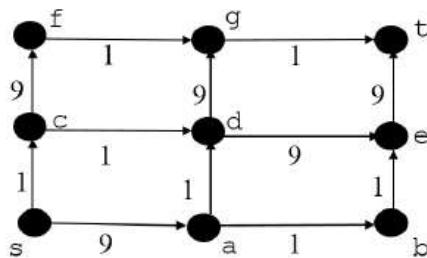

The sum of the quality-scores of all the vertices in the graph shown above is

Given 930

Answer :

Question Type : NAT

Question ID : 8232513155

Status : Marked For Review

Q.16 Consider the cyclic redundancy check (CRC) based error detecting scheme having the generator polynomial $X^3 + X + 1$. Suppose the message $m_4m_3m_2m_1m_0 = 11000$ is to be transmitted. Check bits $c_2c_1c_0$ are appended at the end of the message by the transmitter using the above CRC scheme. The transmitted bit string is denoted by $m_4m_3m_2m_1m_0c_2c_1c_0$. The value of the checkbit sequence $c_2c_1c_0$ is

Options

1. 101
2. 100
3. 111
4. 110

Question Type : MCQ

Question ID : 8232513134

Status : Not Answered

Chosen Option : --

Q.17 Consider a network using the pure ALOHA medium access control protocol, where each frame is of length 1,000 bits. The channel transmission rate is 1 Mbps ($= 10^6$ bits per second). The aggregate number of transmissions across all the nodes (including new frame transmissions and retransmitted frames due to collisions) is modelled as a Poisson process with a rate of 1,000 frames per second. Throughput is defined as the average number of frames successfully transmitted per second. The throughput of the network (rounded to the nearest integer) is _____.

Given 128

Answer :

Question Type : NAT

Question ID : 8232513154

Status : Answered

- Q.18** Consider the three-way handshake mechanism followed during TCP connection establishment between hosts P and Q. Let X and Y be two random 32-bit starting sequence numbers chosen by P and Q respectively. Suppose P sends a TCP connection request message to Q with a TCP segment having SYN bit = 1, SEQ number = X, and ACK bit = 0. Suppose Q accepts the connection request. Which one of the following choices represents the information present in the TCP segment header that is sent by Q to P?

Options 1.

- SYN bit = 1, SEQ number = Y, ACK bit = 1, ACK number = X, FIN bit = 0
- 2.
- SYN bit = 1, SEQ number = X+1, ACK bit = 0, ACK number = Y, FIN bit = 0
- 3.
- SYN bit = 0, SEQ number = X+1, ACK bit = 0, ACK number = Y, FIN bit = 1
- 4.
- SYN bit = 1, SEQ number = Y, ACK bit = 1, ACK number = X+1, FIN bit = 0

Question Type : MCQ

Question ID : 8232513107

Status : Not Answered

Chosen Option : --

Q.19 Consider the following ANSI C program:

```
int main() {  
    Integer x;  
    return 0;  
}
```

Which one of the following phases in a seven-phase C compiler will throw an error?

Options

1. Syntax analyzer
2. Semantic analyzer
3. Lexical analyzer
4. Machine dependent optimizer

Question Type : **MCQ**

Question ID : **8232513103**

Status : **Not Answered**

Chosen Option : --

Q.20 What is the worst-case number of arithmetic operations performed by recursive binary search on a sorted array of size n ?

Options

1. $\Theta(n^2)$
2. $\Theta(\sqrt{n})$
3. $\Theta(\log_2(n))$
4. $\Theta(n)$

Question Type : MCQ

Question ID : 8232513108

Status : Answered

Chosen Option : 4

Q.21 Consider the following sets, where $n \geq 2$:

S_1 : Set of all $n \times n$ matrices with entries from the set $\{a, b, c\}$

S_2 : Set of all functions from the set $\{0, 1, 2, \dots, n^2 - 1\}$ to the set $\{0, 1, 2\}$

Which of the following choice(s) is/are correct?

Options

1. There exists a bijection from S_1 to S_2 .
2. There does not exist an injection from S_1 to S_2 .
3. There does not exist a bijection from S_1 to S_2 .
4. There exists a surjection from S_1 to S_2 .

Question Type : **MSQ**

Question ID : **8232513111**

Status : **Answered**

Chosen Option : **1,2**

- Q.22** Suppose we want to design a synchronous circuit that processes a string of 0's and 1's. Given a string, it produces another string by replacing the first 1 in any subsequence of consecutive 1's by a 0. Consider the following example.

Input sequence: 00100011000011100
Output sequence: 00000001000001100

A *Mealy Machine* is a state machine where both the next state and the output are functions of the present state and the current input.

The above mentioned circuit can be designed as a two-state Mealy machine. The states in the Mealy machine can be represented using Boolean values 0 and 1. We denote the current state, the next state, the next incoming bit, and the output bit of the Mealy machine by the variables s , t , b and y respectively.

Assume the initial state of the Mealy machine is 0.

What are the Boolean expressions corresponding to t and y in terms of s and b ?

Options

1. $t = s + b$
 $y = s \bar{b}$
2. $t = b$
 $y = s b$
3. $t = s + b$
 $y = s b$
4. $t = b$
 $y = s \bar{b}$

Question Type : MCQ

Question ID : 8232513128

Status : Not Answered

Chosen Option : --

Q.23

A data file consisting of 1,50,000 student-records is stored on a hard disk with block size of 4096 bytes. The data file is sorted on the primary key RollNo. The size of a record pointer for this disk is 7 bytes. Each student-record has a candidate key attribute called ANum of size 12 bytes. Suppose an index file with records consisting of two fields, ANum value and the record pointer to the corresponding student record, is built and stored on the same disk. Assume that the records of data file and index file are not split across disk blocks. The number of blocks in the index file is _____.

Given 64

Answer :

Question Type : NAT

Question ID : 8232513121

Status : Answered

Q.24

For a statement S in a program, in the context of liveness analysis, the following sets are defined:

- $USE(S)$: the set of variables used in S
- $IN(S)$: the set of variables that are live at the entry of S
- $OUT(S)$: the set of variables that are live at the exit of S

Consider a basic block that consists of two statements, S_1 followed by S_2 . Which one of the following statements is correct?

Options

1. $OUT(S_1) = IN(S_2) \cup OUT(S_2)$
2. $OUT(S_1) = USE(S_1) \cup IN(S_2)$
3. $OUT(S_1) = IN(S_1) \cup USE(S_1)$
4. $OUT(S_1) = IN(S_2)$

Question Type : MCQ

Question ID : 8232513138

Status : Not Answered

Chosen Option : --

Q.25 In the context of compilers, which of the following is/are NOT an intermediate representation of the source program?

Options

1. Control Flow Graph (CFG)
2. Symbol table
3. Three address code
4. Abstract Syntax Tree (AST)

Question Type : **MSQ**

Question ID : **8232513113**

Status : **Answered**

Chosen Option : **1,2,3**

Q.26 Consider the following statements S1 and S2 about the relational data model:

- S1: A relation scheme can have at most one foreign key.
S2: A foreign key in a relation scheme R cannot be used to refer to tuples of R.

Which one of the following choices is correct?

Options

1. S1 is true and S2 is false.
2. Both S1 and S2 are false.
3. S1 is false and S2 is true.
4. Both S1 and S2 are true.

Question Type : **MCQ**

Question ID : **8232513106**

Status : **Not Answered**

Chosen Option : --

Q.27 Consider the following ANSI C program.

```
#include <stdio.h>
int main(){
    int arr[4][5];
    int i, j;
    for (i=0; i<4; i++){
        for (j=0; j<5; j++){
            arr[i][j] = 10*i + j;
        }
    }
    printf("%d", *(arr[1] + 9));
    return 0;
}
```


What is the output of the above program?

Options

1. 30
2. 24
3. 20
4. 14

Question Type : MCQ
Question ID : 8232513110
Status : Answered
Chosen Option : 2

Q.28 Consider the following directed graph:

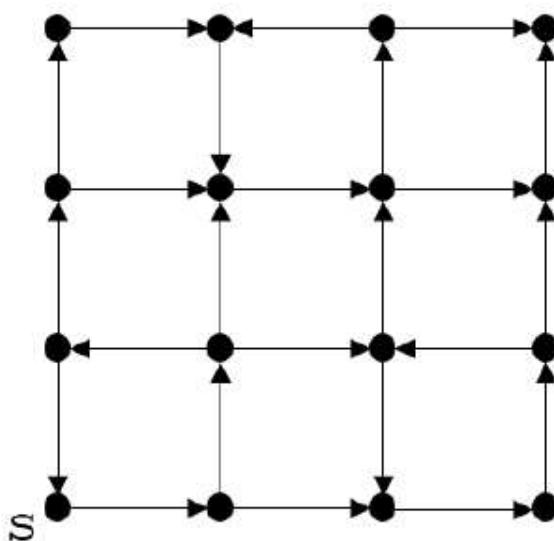

Which of the following is/are correct about the graph?

Options 1.

For each pair of vertices u and v , there is a directed path from u to v .

2. The graph does not have a topological order.
 - 3.
 - A depth-first traversal starting at vertex S classifies three directed edges as back edges.
 - 4.
- The graph does not have a strongly connected component.

Question Type : MSQ

Question ID : 8232513146

Status : Answered

Chosen Option : 2,4

Q.29

In an examination, a student can choose the order in which two questions (QuesA and QuesB) must be attempted.

- If the first question is answered wrong, the student gets zero marks.
- If the first question is answered correctly and the second question is not answered correctly, the student gets the marks only for the first question.
- If both the questions are answered correctly, the student gets the sum of the marks of the two questions.

The following table shows the probability of correctly answering a question and the marks of the question respectively.

question	probability of answering correctly	marks
QuesA	0.8	10
QuesB	0.5	20

Assuming that the student always wants to maximize her expected marks in the examination, in which order should she attempt the questions and what is the expected marks for that order (assume that the questions are independent)?

Options

1. First QuesA and then QuesB. Expected marks 14.
2. First QuesA and then QuesB. Expected marks 16.
3. First QuesB and then QuesA. Expected marks 14.
4. First QuesB and then QuesA. Expected marks 22.

Question Type : MCQ

Question ID : 8232513129

Status : Not Answered

Chosen Option : --

Q.30

Consider the string `abbccddeee`. Each letter in the string must be assigned a binary code satisfying the following properties:

1. For any two letters, the code assigned to one letter must not be a prefix of the code assigned to the other letter.
2. For any two letters of the same frequency, the letter which occurs earlier in the dictionary order is assigned a code whose length is at most the length of the code assigned to the other letter.

Among the set of all binary code assignments which satisfy the above two properties, what is the minimum length of the encoded string?

Options

1. 25
2. 21
3. 30
4. 23

Question Type : MCQ

Question ID : 8232513126

Status : Not Answered

Chosen Option : --

Q.31

Consider a set-associative cache of size 2KB ($1\text{KB} = 2^{10}$ bytes) with cache block size of 64 bytes. Assume that the cache is byte-addressable and a 32-bit address is used for accessing the cache. If the width of the tag field is 22 bits, the associativity of the cache is _____.

Given 28

Answer :

Question Type : NAT

Question ID : 8232513119

Status : Answered

- Q.32** For two n -dimensional real vectors P and Q , the operation $s(P, Q)$ is defined as follows:

$$s(P, Q) = \sum_{i=1}^n (P[i] \cdot Q[i])$$

Let \mathcal{L} be a set of 10-dimensional non-zero real vectors such that for every pair of distinct vectors $P, Q \in \mathcal{L}$, $s(P, Q) = 0$. What is the maximum cardinality possible for the set \mathcal{L} ?

Options

1. 9
2. 100
3. 11
4. 10

Question Type : MCQ

Question ID : 8232513137





Status : Not Answered

Chosen Option : --

- Q.33** Which one of the following circuits implements the Boolean function given below?

$$f(x, y, z) = m_0 + m_1 + m_3 + m_4 + m_5 + m_6, \text{ where } m_i \text{ is the } i^{\text{th}} \text{ minterm.}$$

Options



Question Type : MCQ

Question ID : 8232513105

Status : Not Answered

Chosen Option : --

Q.34

For a string w , we define w^R to be the reverse of w . For example, if $w = 01101$ then $w^R = 10110$.

Which of the following languages is/are context-free?

Options

1. $\{ww^Rxx^R \mid w, x \in \{0, 1\}^*\}$
2. $\{wxw^Rx^R \mid w, x \in \{0, 1\}^*\}$
3. $\{wxw^Rw^R \mid w, x \in \{0, 1\}^*\}$
4. $\{wxw^R \mid w, x \in \{0, 1\}^*\}$

Question Type : **MSQ**

Question ID : **8232513141**

Status : **Answered**

Chosen Option : **1,2**

Q.35 Consider a pipelined processor with 5 stages, Instruction Fetch (IF), Instruction Decode (ID), Execute (EX), Memory Access (MEM), and Write Back (WB). Each stage of the pipeline, except the EX stage, takes one cycle. Assume that the ID stage merely decodes the instruction and the register read is performed in the EX stage. The EX stage takes one cycle for ADD instruction and two cycles for MUL instruction. Ignore pipeline register latencies.

Consider the following sequence of 8 instructions:

ADD, MUL, ADD, MUL, ADD, MUL, ADD, MUL

Assume that every MUL instruction is data-dependent on the ADD instruction just before it and every ADD instruction (except the first ADD) is data-dependent on the MUL instruction just before it. The *Speedup* is defined as follows:

$$\text{Speedup} = \frac{\text{Execution time without operand forwarding}}{\text{Execution time with operand forwarding}}$$

The *Speedup* achieved in executing the given instruction sequence on the pipelined processor (rounded to 2 decimal places) is _____.

Given 15


Answer :

Question Type : NAT

Question ID : 8232513153

Status : Answered

Q.36 Consider the following deterministic finite automaton (DFA).

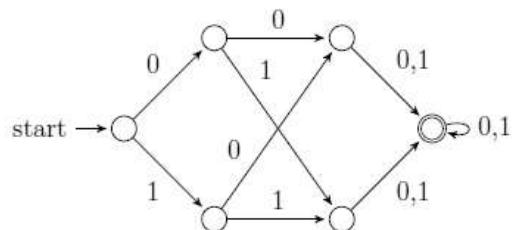

The number of strings of length 8 accepted by the above automaton is

Given **256**

Answer :

Question Type : NAT

Question ID : 8232513117

Status : Answered

Q.37 A bag has r red balls and b black balls. All balls are identical except for their colours. In a trial, a ball is randomly drawn from the bag, its colour is noted and the ball is placed back into the bag along with another ball of the same colour. Note that the number of balls in the bag will increase by one, after the trial. A sequence of four such trials is conducted. Which one of the following choices gives the probability of drawing a red ball in the fourth trial?

Options

1. $\frac{r}{r+b+3}$

2. $\frac{r}{r+b}$

3. $\left(\frac{r}{r+b}\right) \left(\frac{r+1}{r+b+1}\right) \left(\frac{r+2}{r+b+2}\right) \left(\frac{r+3}{r+b+3}\right)$

4. $\frac{r+3}{r+b+3}$

Question Type : MCQ

Question ID : 8232513133

Status : Answered

Chosen Option : 3

Q.38 Let S be a set consisting of 10 elements. The number of tuples of the form (A, B) such that A and B are subsets of S , and $A \subseteq B$ is _____.

Given 81

Answer :

Question Type : NAT

Question ID : 8232513150

Status : Answered

Q.39 Let G be a connected undirected weighted graph. Consider the following two statements.

S_1 : There exists a minimum weight edge in G which is present in every minimum spanning tree of G .

S_2 : If every edge in G has distinct weight, then G has a unique minimum spanning tree.

Which one of the following options is correct?

Options

1. S_1 is true and S_2 is false.
2. Both S_1 and S_2 are false.
3. Both S_1 and S_2 are true.
4. S_1 is false and S_2 is true.

Question Type : MCQ

Question ID : 8232513101

Status : Answered

Chosen Option : 3

Q.40 Assume a two-level inclusive cache hierarchy, L1 and L2, where L2 is the larger of the two. Consider the following statements.

- S_1 : Read misses in a write through L1 cache do not result in writebacks of dirty lines to the L2.
- S_2 : Write allocate policy *must* be used in conjunction with write through caches and no-write allocate policy is used with writeback caches.

Which of the following statements is correct?

Options

1. S_1 is false and S_2 is true
2. S_1 is false and S_2 is false
3. S_1 is true and S_2 is false
4. S_1 is true and S_2 is true

Question Type : MCQ

Question ID : 8232513127

Status : Not Answered

Chosen Option : --

Q.41 Suppose that P is a 4×5 matrix such that every solution of the equation $Px = 0$ is a scalar multiple of $[2 \ 5 \ 4 \ 3 \ 1]^T$. The rank of P is _____.

Given 2

Answer :

Question Type : NAT

Question ID : 8232513124

Status : Answered

- Q.42** Choose the correct choice(s) regarding the following propositional logic assertion S :

$$S : ((P \wedge Q) \rightarrow R) \rightarrow ((P \wedge Q) \rightarrow (Q \rightarrow R))$$

Options

1. S is a contradiction.
2. S is a tautology.
- 3.

The antecedent of S is logically equivalent to the consequent of S .

4. S is neither a tautology nor a contradiction.

Question Type : MSQ
Question ID : 8232513115
Status : Answered
Chosen Option : 1,3

- Q.43** Which of the following regular expressions represent(s) the set of all binary numbers that are divisible by three? Assume that the string ϵ is divisible by three.

Options

1. $(0 + 1(01^*0)^*1)^*$
2. $(0^*(1(01^*0)^*1))^*$
3. $(0 + 11 + 10(1 + 00)^*01)^*$
4. $(0 + 11 + 11(1 + 00)^*00)^*$

Question Type : MSQ
Question ID : 8232513147
Status : Answered
Chosen Option : 1,2,3

Q.44

For a given biased coin, the probability that the outcome of a toss is a head is 0.4. This coin is tossed 1,000 times. Let X denote the random variable whose value is the number of times that head appeared in these 1,000 tosses. The standard deviation of X (rounded to 2 decimal places) is _____.

Given **400**

Answer :

Question Type : NAT

Question ID : 8232513122

Status : Answered

Q.45 Consider the following ANSI C program.

```
#include <stdio.h>

int foo(int x, int y, int q)
{
    if ((x <= 0) && (y <= 0))
        return q;
    if (x <= 0)
        return foo(x, y-q, q);
    if (y <= 0)
        return foo(x-q, y, q);
    return foo(x, y-q, q) + foo(x-q, y, q);
}

int main()
{
    int r = foo(15,15,10);
    printf("%d", r);
    return 0;
}
```

The output of the program upon execution is _____.

Given 40


Answer :

Question Type : NAT

Question ID : 8232513149

Status : Answered

- Q.46** Consider a computer network using the distance vector routing algorithm in its network layer. The partial topology of the network is as shown below.



The objective is to find the shortest-cost path from the router R to routers P and Q .

Assume that R does not initially know the shortest routes to P and Q . Assume that R has three neighbouring routers denoted as X , Y , and Z . During one iteration, R measures its distance to its neighbours X , Y , and Z as 3, 2, and 5, respectively. Router R gets routing vectors from its neighbours that indicate that the distance to router P from routers X , Y , and Z are 7, 6, and 5, respectively. The routing vector also indicates that the distance to router Q from routers X , Y , and Z are 4, 6, and 8, respectively. Which of the following statement(s) is/are correct with respect to the new routing table of R , after updation during this iteration?

Options

1. The distance from R to P will be stored as 10.
2. The distance from R to Q will be stored as 7.
3. The next hop router for a packet from R to P is Y .
4. The next hop router for a packet from R to Q is Z .

Question Type : **MSQ**

Question ID : **8232513145**

Status : **Answered**

Chosen Option : **1,3**

Q.47 Consider the following two statements about regular languages:

S_1 : Every infinite regular language contains an undecidable language as a subset.

S_2 : Every finite language is regular.

Which one of the following choices is correct?

Options

1. Only S_1 is true.
2. Both S_1 and S_2 are true.
3. Only S_2 is true.
4. Neither S_1 nor S_2 is true.

Question Type : MCQ

Question ID : 8232513136

Status : Not Answered

Chosen Option : --

Q.48

For constants $a \geq 1$ and $b > 1$, consider the following recurrence defined on the non-negative integers:

$$T(n) = a \cdot T\left(\frac{n}{b}\right) + f(n)$$

Which one of the following options is correct about the recurrence $T(n)$?

Options

1. If $f(n)$ is $\frac{n}{\log_2(n)}$, then $T(n)$ is $\Theta(\log_2(n))$.
 2. If $f(n)$ is $n \log_2(n)$, then $T(n)$ is $\Theta(n \log_2(n))$.
 3. If $f(n)$ is $\Theta(n^{\log_b(a)})$, then $T(n)$ is $\Theta(n^{\log_b(a)})$.
 - 4.
- If $f(n)$ is $O(n^{\log_b(a)-\epsilon})$ for some $\epsilon > 0$, then $T(n)$ is $\Theta(n^{\log_b(a)})$.

Question Type : MCQ

Question ID : 8232513139

Status : Not Answered

Chosen Option : --

Q.49

Let S be the following schedule of operations of three transactions T_1 , T_2 and T_3 in a relational database system:

$R_2(Y), R_1(X), R_3(Z), R_1(Y), W_1(X), R_2(Z), W_2(Y), R_3(X), W_3(Z)$

Consider the statements P and Q below:

P: S is conflict-serializable.

Q: If T_3 commits before T_1 finishes, then S is recoverable.

Which one of the following choices is correct?

Options

1. P is false and Q is true.
2. P is true and Q is false.
3. Both P and Q are false.
4. Both P and Q are true.

Question Type : MCQ

Question ID : 8232513132

Status : Not Answered

Chosen Option : --

- Q.50** Suppose the following functional dependencies hold on a relation U with attributes P, Q, R, S , and T :

$$\begin{array}{l} P \rightarrow QR \\ RS \rightarrow T \end{array}$$

Which of the following functional dependencies can be inferred from the above functional dependencies?

Options

1. $PS \rightarrow T$
2. $P \rightarrow R$
3. $R \rightarrow T$
4. $PS \rightarrow Q$

Question Type : **MSQ**

Question ID : **8232513140**

Status : **Answered**

Chosen Option : **1,2,4**

Q.51 Which of the following statement(s) is/are correct in the context of CPU scheduling?

Options 1.

Round-robin policy can be used even when the CPU time required by each of the processes is not known apriori.

2.

The goal is to only maximize CPU utilization and minimize throughput.

3.

Implementing preemptive scheduling needs hardware support.

4. Turnaround time includes waiting time.

Question Type : **MSQ**

Question ID : **8232513114**

Status : **Answered**

Chosen Option : **1,4**

Q.52 Consider the following ANSI C code segment:

```
z = x + 3 + y->f1 + y->f2;
for (i = 0; i < 200; i = i + 2){
    if (z > i) {
        p = p + x + 3;
        q = q + y->f1;
    } else {
        p = p + y->f2;
        q = q + x + 3;
    }
}
```

Assume that the variable **y** points to a **struct** (allocated on the heap) containing two fields **f1** and **f2**, and the local variables **x**, **y**, **z**, **p**, **q**, and **i** are allotted registers. Common sub-expression elimination (CSE) optimization is applied on the code. The number of addition and dereference operations (of the form **y->f1** or **y->f2**) in the optimized code, respectively, are:

Options

1. 403 and 102
2. 303 and 102
3. 303 and 2
4. 203 and 2

Question Type : MCQ

Question ID : 8232513130

Status : Not Answered

Chosen Option : --

- Q.53** The format of the single-precision floating-point representation of a real number as per the IEEE 754 standard is as follows:

sign	exponent	mantissa
------	----------	----------

Which one of the following choices is correct with respect to the *smallest* normalized positive number represented using the standard?

Options 1.

1. exponent = 00000000 and mantissa = 00000000000000000000000000000000

2.

exponent = 00000000 and mantissa = 00000000000000000000000000000001

3.

exponent = 00000001 and mantissa = 00000000000000000000000000000001

4.

exponent = 00000001 and mantissa = 00000000000000000000000000000000

Question Type : **MCQ**

Question ID : **8232513104**

Status : **Not Answered**

Chosen Option : --

Q.54

Let L_1 be a regular language and L_2 be a context-free language. Which of the following languages is/are context-free?

Options

1. $(L_1 \cap L_2) \cup (\overline{L_1} \cap L_2)$
2. $\overline{L_1} \cup \overline{L_2}$
3. $L_1 \cap \overline{L_2}$
4. $L_1 \cup (L_2 \cup \overline{L_2})$

Question Type : **MSQ**Question ID : **8232513112**Status : **Answered**Chosen Option : **1,2,3****Q.55**

Let H be a binary min-heap consisting of n elements implemented as an array. What is the worst case time complexity of an optimal algorithm to find the maximum element in H ?

Options

1. $\Theta(1)$
2. $\Theta(\log n)$
3. $\Theta(n \log n)$
4. $\Theta(n)$

Question Type : **MCQ**Question ID : **8232513102**Status : **Answered**Chosen Option : **4**