Image Processing and Medical Imaging

Image Enhancement

This work was supported by the construction EFOP-3.4.3-16-2016-00021. The project was supported by the European Union, co-financed by the European Social Fund.

UNIVERSITY of DEBRECEN

Image filtering

Filtering – as we have already known – transform pixel intensity values to reveal certain image characteristics.

- Enhancement: improves contrast
- Smoothing: remove noises
- Template matching: detects known patterns

UNIVERSITY of DEBRECEN

Steps for filtering in the frequency domain

- Given an input image $f(x,y)$ of size MxN.
- Compute $F(u,v)$ based on Fourier transform.
- Generate a real, symmetric filter function $H(u,v)$.
- Calculate $G(u,v)=F(u,v)H(u,v)$.
- Compute $f'(x,y)$ based on inverse Fourier transform.

UNIVERSITY of DEBRECEN

Ideal Low Pass Filter (ILPF)

- Let us consider the following so-called filter function: $H(u,v)=1$, if $\rho(u,v)\leq\omega$, $H(u,v)=0$ otherwise.
- Here $\rho(u,v)$ is a distance function (distance between the origin and the point with coords (u,v)).
- The given value ω is the **cutting frequency**.

UNIVERSITY of DEBRECEN

Graph of Ideal Low Pass Filter (ILPF)

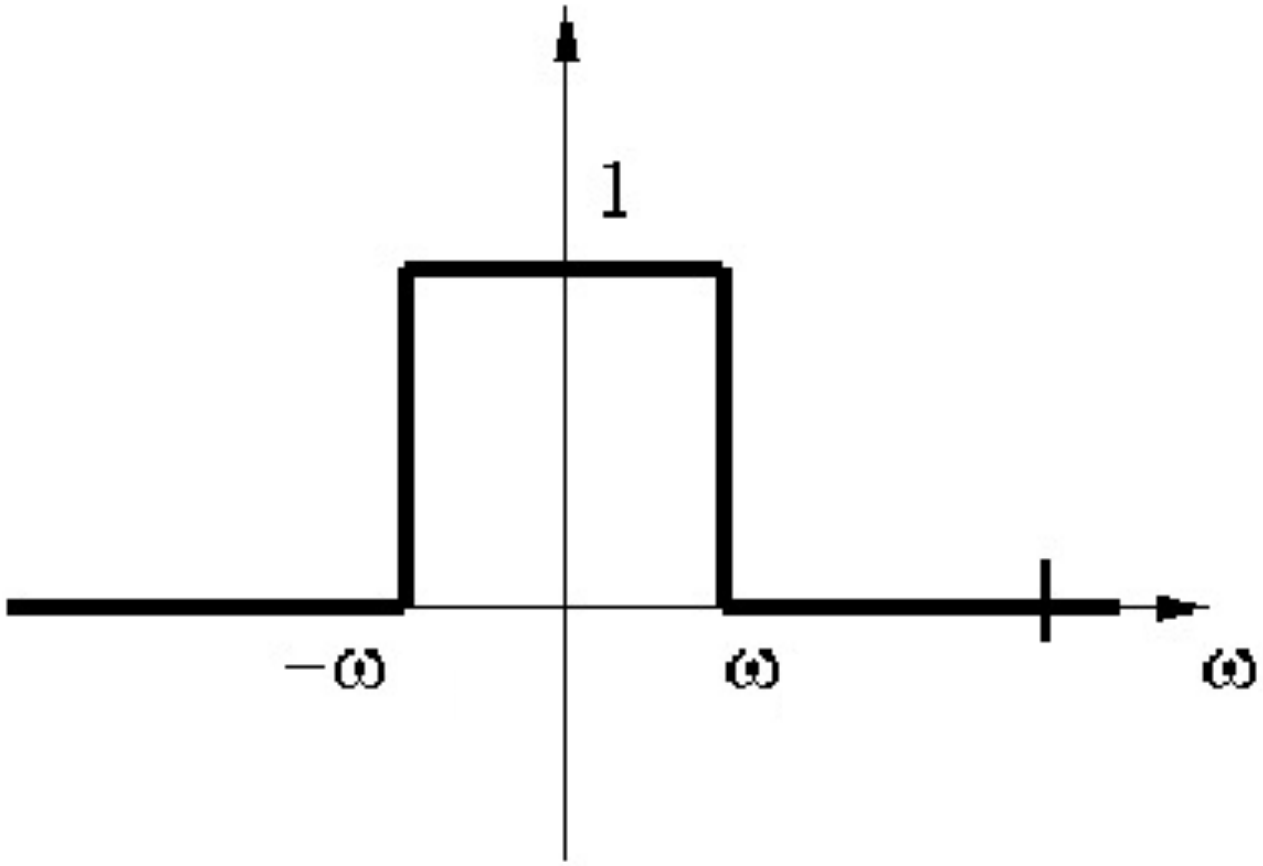

UNIVERSITY DEBRECEN

Ideal High Pass Filter – „ringing” effect

The ideal filter is not ideal, because this is the discrete case. In this case so-called „ring” come up.

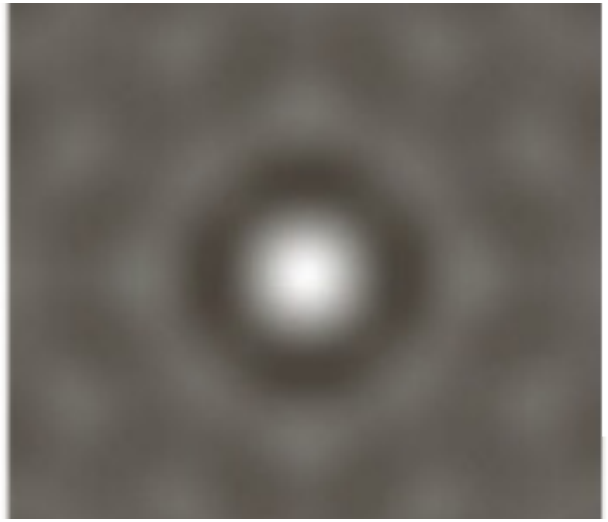

UNIVERSITY of DEBRECEN

Butterworth Low Pass Filter (BLPF)

- To avoid the so-called “ringing” effect, better to no use ILPF. A better function is BLPF. Transfer function of a Butterworth low pass filter of order *n* and with cut-off frequency at a distance D_0 from the origin:

$$H(u,v) = \frac{1}{1 + (\frac{\sigma(u,v)}{\omega_0})^{2n}}$$

UNIVERSITY of DEBRECEN

Butterworth Low Pass Filter

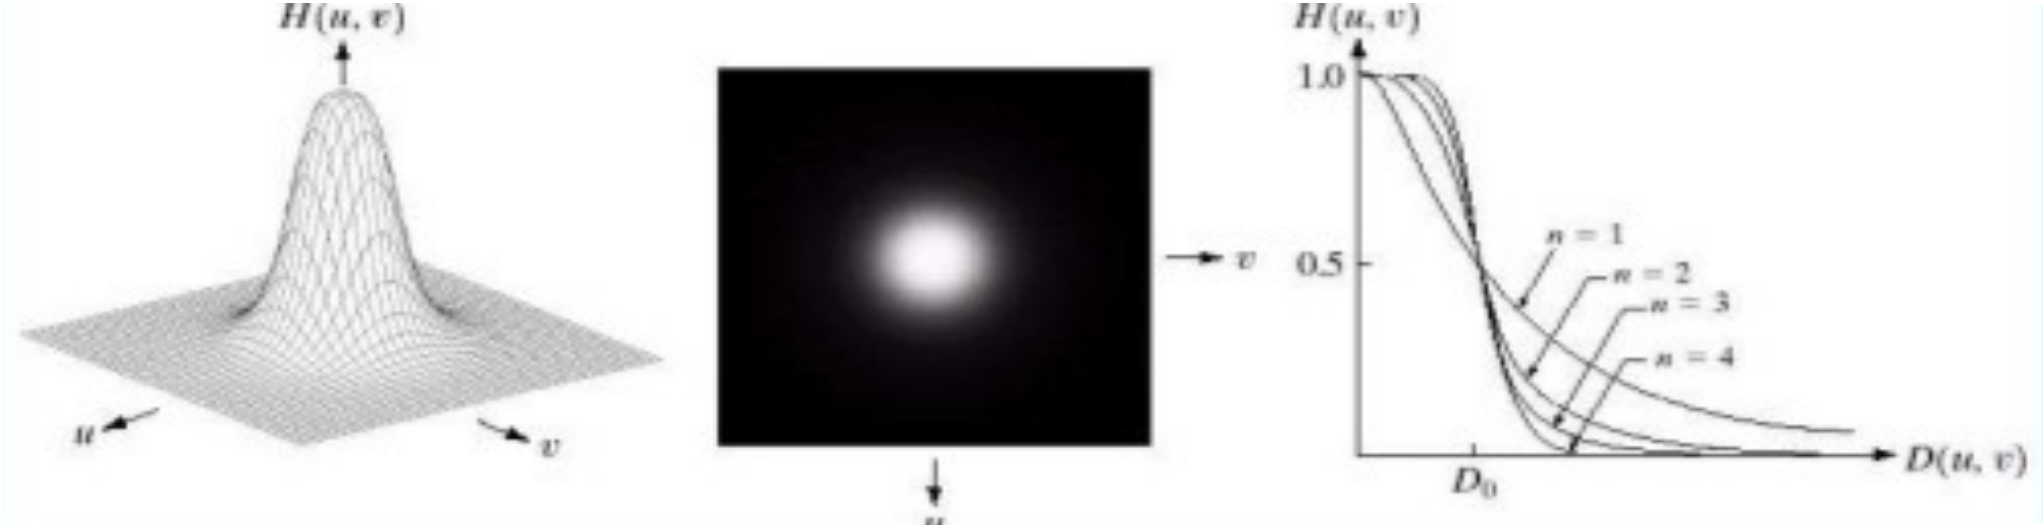

Source: https://www.slideshare.net/KarthikaRamachandran/image-enhancement-using-frequency-domain-filters

UNIVERSITY of DEBRECEN

Gaussian Low Pass Filter (GLPF)

- In this case the filter function is

$$H(u,v) = e^{\frac{-\sigma^2(u,v)}{2d^2}}.$$

- Here *d* is a parameter (variencia).

UNIVERSITY of DEBRECEN

Gaussian Low Pass Filter

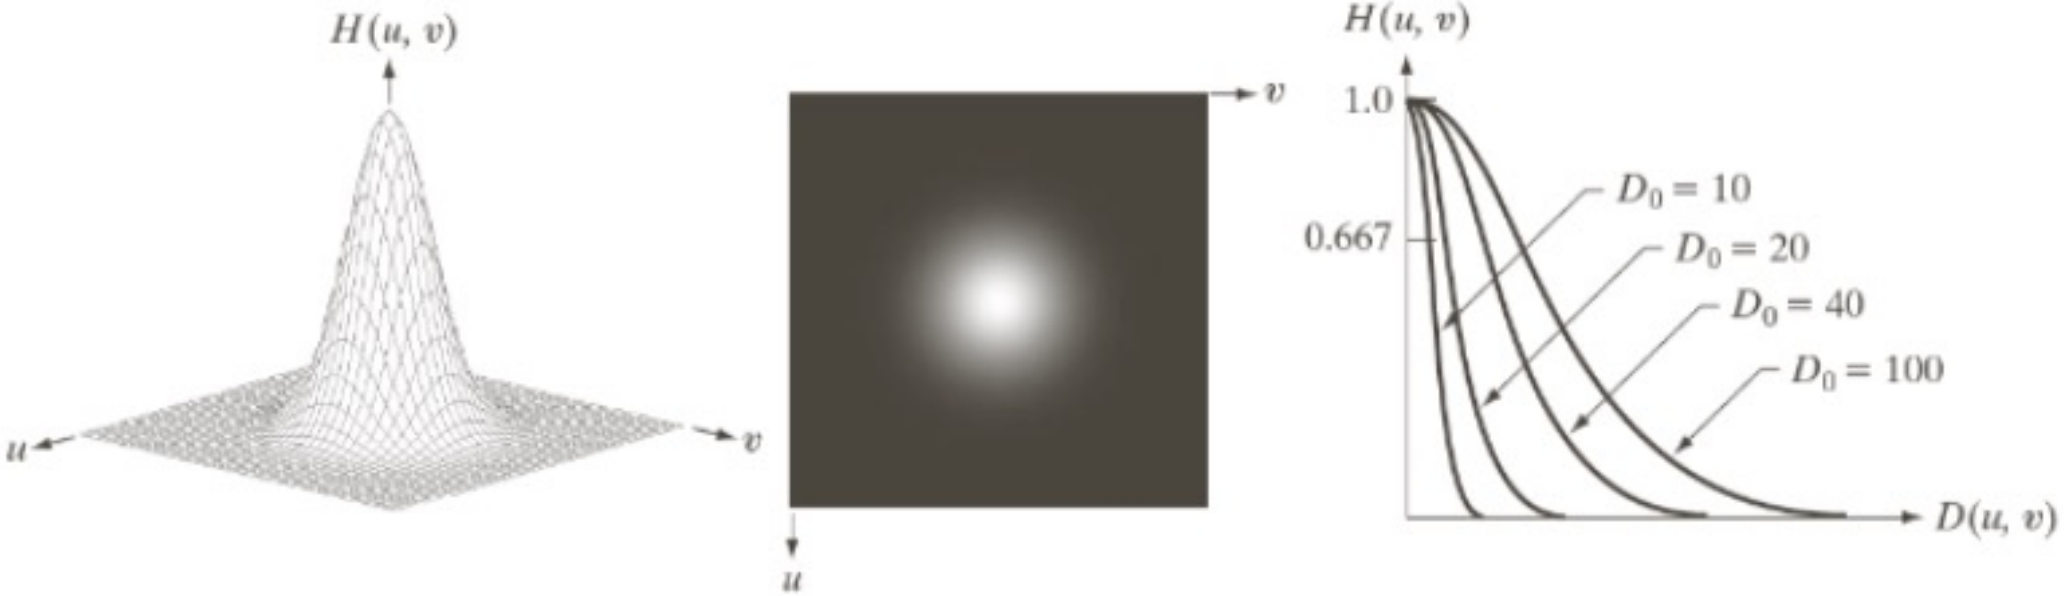

Source: https://www.slideshare.net/KarthikaRamachandran/image-enhancement-using-frequency-domain-filters

UNIVERSITY of DEBRECEN

Publishing industry: „cosmetics” by GLPF

UNIVERSITY of DEBRECEN

Source: https://www.slideshare.net/KarthikaRamachandran/image-enhancement-using-frequency-domain-filters

Image sharpening using frequency domain

- High pass filter: attenuation of the high-frequency component of the Fourier transform of the image.
- As before: radially symmetric filter.
- A high pass filter H_{HP} can be obtained from a given low pass filter H_{LP}:

$$H_{HP}(u,v)=1-H_{LP}(u,v)$$

UNIVERSITY of DEBRECEN

Ideal High Pass Filter (IHPF)

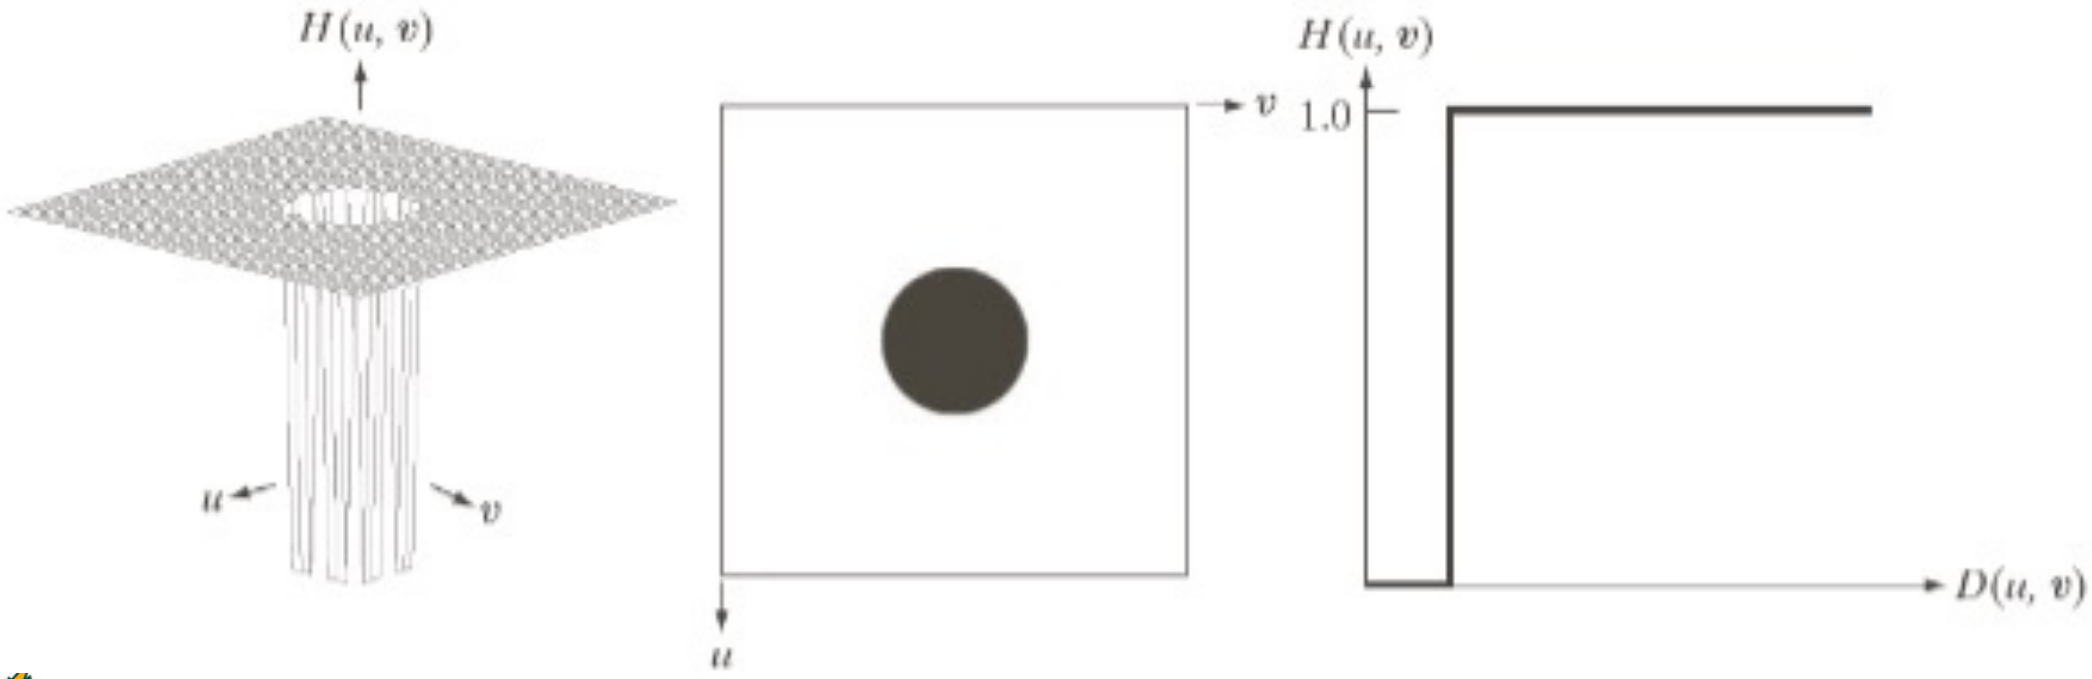

Sorce: http://www.programmersought.com/article/5030751688/

Butterworth High Pass Filter (BHPF)

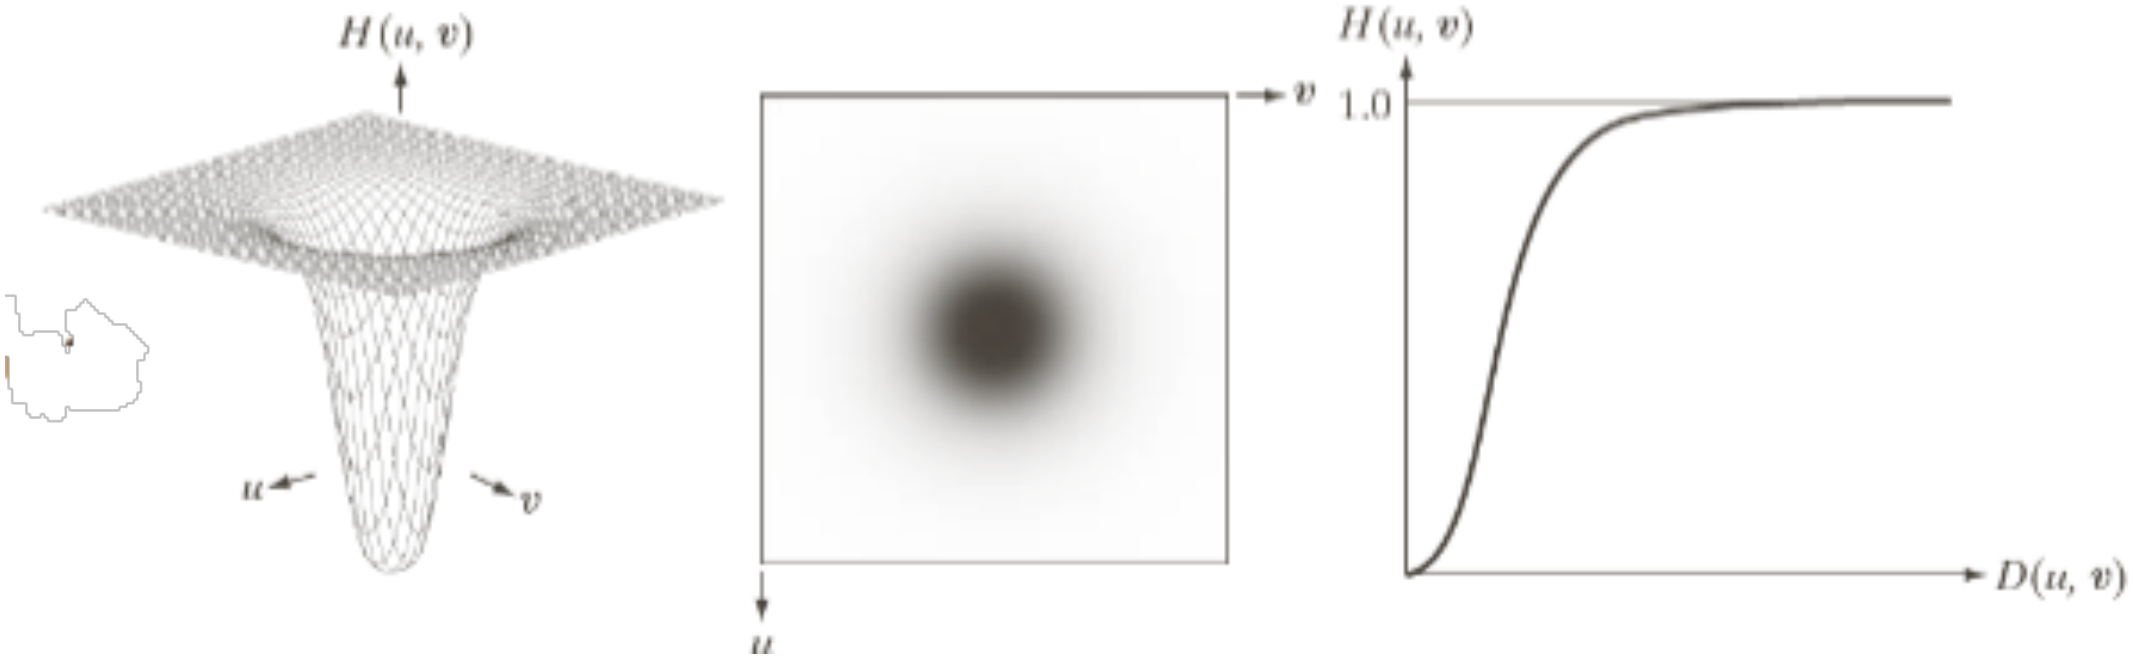

Source: https://www.slideserve.com/eyal/image-processing

Gaussian High Pass Filter (GHPF)

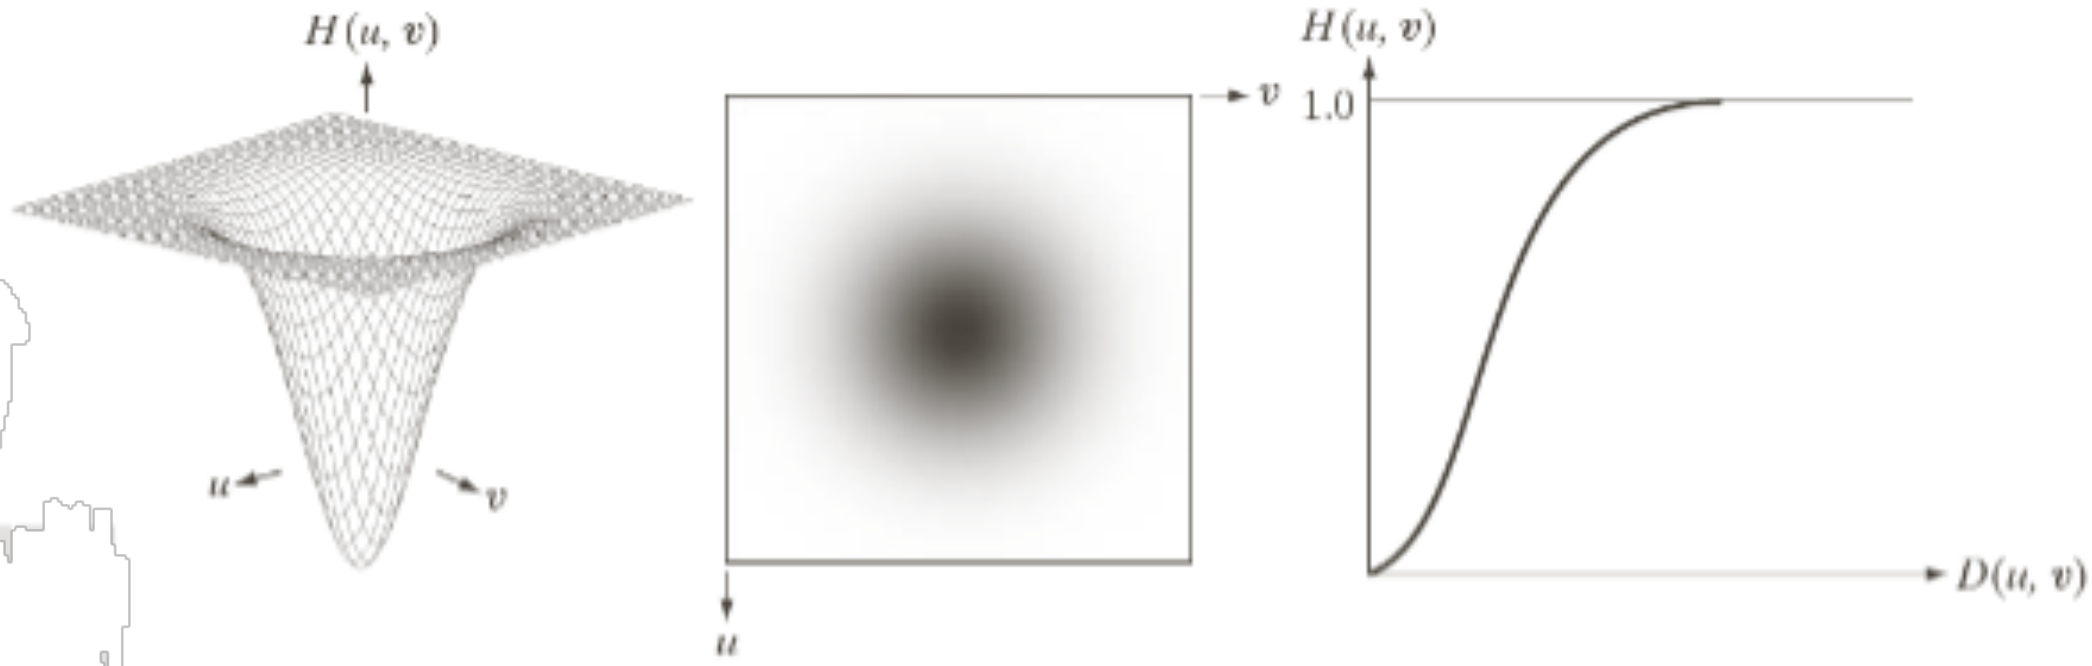

UNIVERSITY of DEBRECEN

https://www.slideserve.com/eyal/image-processing

„Ring” effect

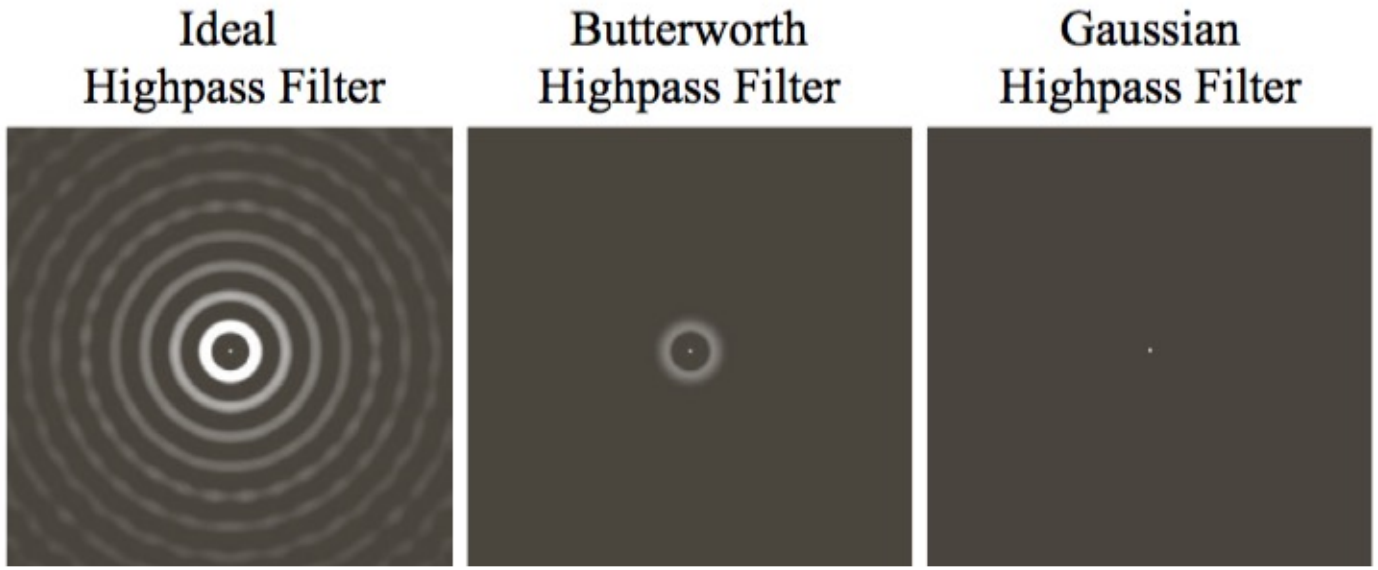

UNIVERSITY of DEBRECEN

Band Pass Filters

- There are two cut-off frequencies. Let us suppose they are ω_1 and ω_2. The following inequality holds: $\omega_1 < \omega_2$.
- Take a High Pass Filter with cut-off frequency ω_1.
- After the execution of the High Pass Filter, take and execute a Low Pass Filter with cut-off frequency ω_2.

UNIVERSITY of DEBRECEN

Band Reject/Cut Filters

- A band reject filter H_{BR} is obtained from a band pass filter H_{BP} as:

$$H_{BR}(u,v)=1-H_{BP}(u,v)$$

UNIVERSITY of DEBRECEN

Notch Filters

- Reject (or pass) frequencies in a predefined neighbourhood about the centre of the frequency rectangle.
- Constructed as products of high pass filters whose centres have been translated to the centres of the notches.

$$H_{NR}(u,v) = \prod_{k=1}^{Q} H_k(u,v) H_{-k}(u,v)$$

UNIVERSITY of DEBRECEN

Notch Filters

Example: Butterworth notch reject filter of order *n*, containing 3 notch pairs:

$$H_{NR}(u,v) = \prod_{k=1}^{3} \left[\frac{1}{1 + [D_{0k}/D_k(u,v)]^{2n}} \right] \left[\frac{1}{1 + [D_{0k}/D_{-k}(u,v)]^{2n}} \right]$$

UNIVERSITY of DEBRECEN

Notch Filters: Example

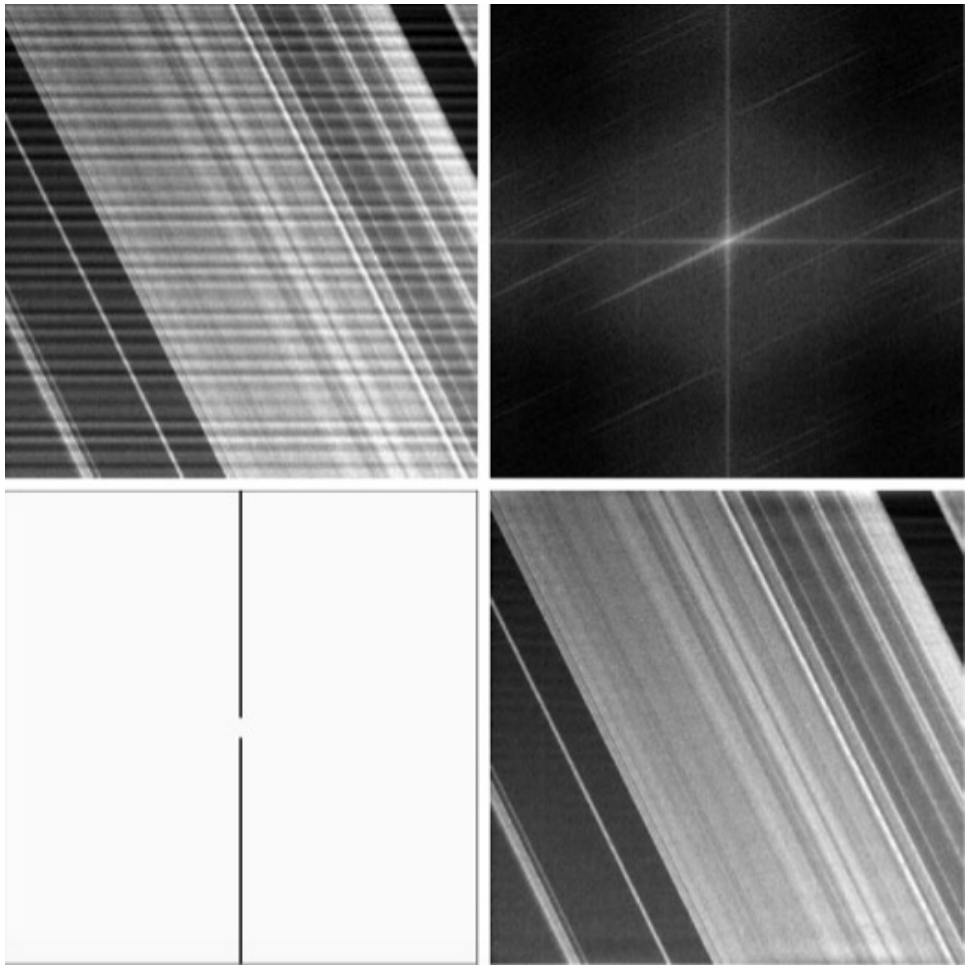

UNIVERSITY of DEBRECEN

Convolution filter in the spatial domain

- Based on the convolution theorem.
- Problems: not easy to invert the filter function
- Cheaper?
- Convolution masks

UNIVERSITY of DEBRECEN

Thank you for your attention