


# iOS6 Development for Beginners

## Lab Exercise 1

### Task 1

1) Follow the steps demonstrated in the video lecture to set up a new iOS 6 application in Xcode 4. Use the following settings when prompted:

2) Open the Storyboard and place a text field, a button, and a label on the application surface, mimicking the view below.

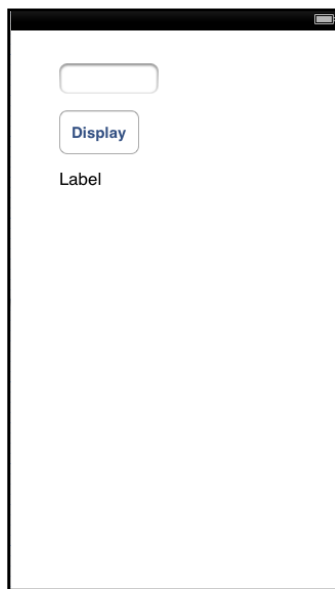

- \* Single View Application
- \* Product Name: Text Output Lab
- \* Organization Name: As You Desire
- \* Company Identifier: As Appropriate
- \* Devices: iPhone
- \* Use Storyboard: Checked
- \* Use Automatic Reference Counting: Checked

3) Take the necessary steps to create outlets and connect the labels. You may give them instance names of txtInput and lblOutput. Ensure that they are referenced in the view controller's header file and that appropriate connections are made using the storyboard.

4) Associate an action and callback function with the button named btnDisplay. In your callback function, have the label populate with the data in the text field when the button is pressed.

5) Test your application and ensure it runs as specified. Make any necessary corrections to make it run correctly.

6) All Steps can be repeated for iOS 7 using Xcode 5.

## Task 2

1) Create a new project called Basic Calculator for iOS 6 using Xcode 4. The setup options appear below:

2) Use the storyboard to create a user interface similar to the illustration below:



- \* Single View Application
- \* Product Name: Basic Calculator
- \* Organization Name: As You Desire
- \* Company Identifier: As Appropriate
- \* Devices: iPhone
- \* Use Storyboard: Checked
- \* Use Automatic Reference Counting: Checked

3) The Text Fields should be set up as outlets named txtNumber1 and txtNumber2. Ensure that there is a reference to the outlets in the view controller's header file and the correct connection is made in the storyboard. The label should be created as an outlet named lblResult with correct connections made.

4) The buttons should be correctly configured to launch functions called btnAdd, btnSubtract, btnMultiply, and btnDivide. Make sure the function prototype appears in the header and the correct connection is made using the storyboard.

5) Write correct implementations for the functions so that the correct result is displayed in the label when the button is pushed—the '+' button should add the results, the '-' button should subtract, and so on. Note: Set number variables used to float in callback functions so the label will display a decimal value.

6) Build and test your application debugging as necessary.

▲ Register as a Learntoprogram.tv student at: <http://goo.gl/1DDDn>. This will provide you access to numerous resources as well as discounts on future classes.

▲ Like us on Facebook at: <http://www.facebook.com/learntoprogram.tv>