



Vidyavardhini's College of Engineering and Technology

Department of Artificial Intelligence & Data Science

Experiment No. 7
Implement Booth's algorithm using c-programming
Name:Rushikesh Khemnar
Roll Number:25
Date of Performance:04/09/24
Date of Submission:



Vidyavardhini's College of Engineering and Technology

Department of Artificial Intelligence & Data Science

Aim: To implement Booth's algorithm using c-programming.

Objective -


1. To understand the working of Booths algorithm.
2. To understand how to implement Booth's algorithm using c-programming.

Theory:

Booth's algorithm is a multiplication algorithm that multiplies two signed binary numbers in 2's complement notation. Booth used desk calculators that were faster at shifting than adding and created the algorithm to increase their speed.

The algorithm works as per the following conditions :

1. If Q_n and Q_{-1} are same i.e. 00 or 11 perform arithmetic shift by 1 bit.
2. If $Q_n Q_{-1} = 10$ do $A = A - B$ and perform arithmetic shift by 1 bit.
3. If $Q_n Q_{-1} = 01$ do $A = A + B$ and perform arithmetic shift by 1 bit.

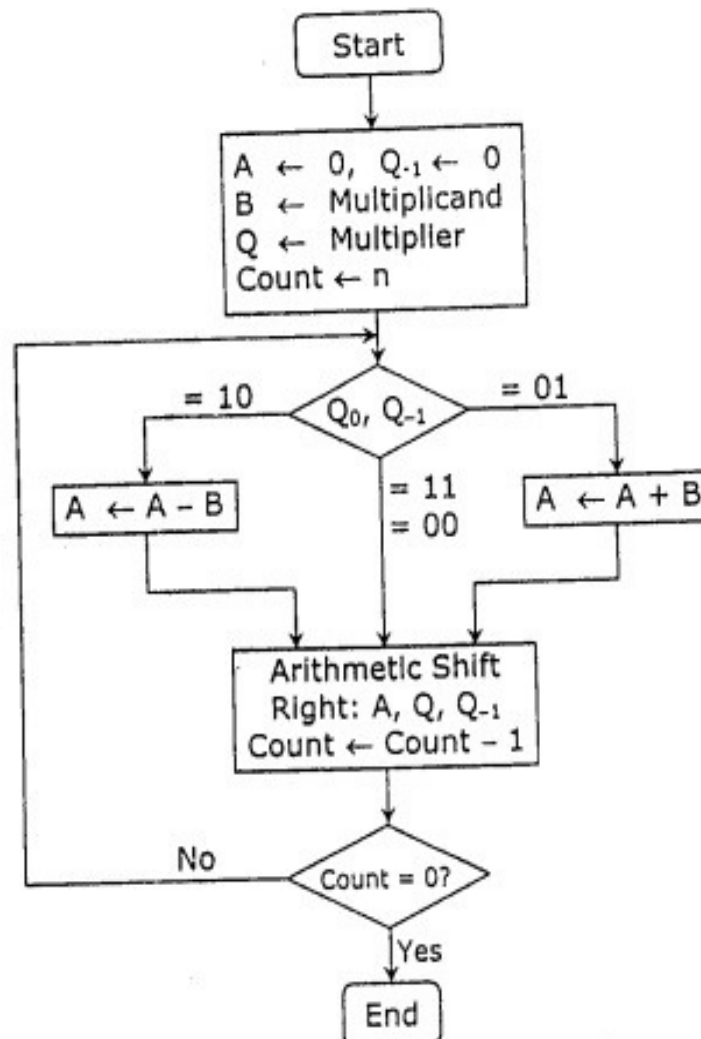



Multiplicand (B) ← 0 1 0 1 (5), Multiplier (Q) ← 0 1 0 0 (4)				
Steps	A	Q	Q ₋₁	Operation
	0 0 0 0	0 1 0 0	0	Initial
Step 1 :	0 0 0 0	0 0 1 0	0	Shift right
Step 2 :	0 0 0 0	0 0 0 1	0	Shift right
Step 3 :	1 0 1 1	0 0 0 1	0	A ← A - B
	1 1 0 1	1 0 0 0	1	Shift right
Step 4 :	0 0 1 0	1 0 0 0	1	A ← A + B
	0 0 0 1	0 1 0 0	0	Shift right
Result	0 0 0 1 0 1 0 0 = +20			

Program:

```
#include <stdio.h>
```

```
#include <math.h>
```

```
int a = 0, b = 0, c = 0, a1 = 0, b1 = 0, com[5] = { 1, 0, 0, 0, 0};
```

```
int anum[5] = {0}, anumcp[5] = {0}, bnum[5] = {0};
```

```
int acomp[5] = {0}, bcomp[5] = {0}, pro[5] = {0}, res[5] = {0};
```

```
void binary(){
```

```
    a1 = fabs(a);
```

```
    b1 = fabs(b);
```

```
    int r, r2, i, temp;
```

```
    for (i = 0; i < 5; i++){
```

```
        r = a1 % 2;
```

```
        a1 = a1 / 2;
```

```
        r2 = b1 % 2;
```

```
        b1 = b1 / 2;
```

```
        anum[i] = r;
```

```
        anumcp[i] = r;
```

```
        bnum[i] = r2;
```

```
        if(r2 == 0){
```

```
            bcomp[i] = 1;
```

```
        }
```

```
        if(r == 0){
```

```
            acomp[i] = 1;
```

```
        }
```

```
    }
```



Vidyavardhini's College of Engineering and Technology

Department of Artificial Intelligence & Data Science

```
//part for two's complementing
c= 0;
for ( i = 0; i < 5; i++){
    res[i] = com[i]+ bcomp[i] + c;
    if(res[i] >= 2){
        c= 1;
    }
    else
        c= 0;
    res[i] = res[i] % 2;
}
for (i = 4; i >= 0; i--){
    bcomp[i] = res[i];
}
//in case of negative inputs
if (a < 0){
    c= 0;
    for (i = 4; i >= 0; i--){
        res[i] = 0;
    }
    for ( i = 0; i < 5; i++){
        res[i] = com[i] + acomp[i] + c;
        if (res[i] >= 2){
            c= 1;
        }
        else
            c= 0;
        res[i] = res[i]%2;
    }
    for (i = 4; i >= 0; i--){
        anum[i] = res[i];
        anumcp[i] = res[i];
    }
}
if(b < 0){
    for (i = 0; i < 5; i++){
        temp = bnum[i];
        bnum[i] = bcomp[i];
        bcomp[i] = temp;
    }
}
```



Vidyavardhini's College of Engineering and Technology

Department of Artificial Intelligence & Data Science

```
}  
}  
void add(int num[]){  
    int i;  
    c= 0;  
    for ( i = 0; i < 5; i++){  
        res[i] = pro[i] + num[i] + c;  
        if (res[i] >= 2){  
            c= 1;  
        }  
        else{  
            c= 0;  
        }  
        res[i] = res[i]%2;  
    }  
    for (i = 4; i >= 0; i--){  
        pro[i] = res[i];  
        printf("%d",pro[i]);  
    }  
    printf(":" );  
    for (i = 4; i >= 0; i--){  
        printf("%d", anumcp[i]);  
    }  
}  
void arshift(){//for arithmetic shift right  
    int temp = pro[4], temp2 = pro[0], i;  
    for (i = 1; i < 5 ; i++){//shift the MSB of product  
        pro[i-1] = pro[i];  
    }  
    pro[4] = temp;  
    for (i = 1; i < 5 ; i++){//shift the LSB of product  
        anumcp[i-1] = anumcp[i];  
    }  
    anumcp[4] = temp2;  
    printf("\nAR-SHIFT: ");//display together  
    for (i = 4; i >= 0; i--){  
        printf("%d",pro[i]);  
    }  
    printf(":" );  
    for(i = 4; i >= 0; i--){  
        printf("%d", anumcp[i]);  
    }  
}
```



Vidyavardhini's College of Engineering and Technology

Department of Artificial Intelligence & Data Science

```
}  
}  
  
void main(){  
int i, q = 0;  
printf("\t\tBOOTH'S MULTIPLICATION ALGORITHM");  
printf("\nEnter two numbers to multiply: ");  
printf("\nBoth must be less than 16");  
//simulating for two numbers each below 16  
do{  
    printf("\nEnter A: ");  
    scanf("%d",&a);  
    printf("Enter B: ");  
    scanf("%d", &b);  
}while(a >=16 || b >=16);  
  
printf("\nExpected product = %d", a * b);  
binary();  
printf("\n\nBinary Equivalents are: ");  
printf("\nA = ");  
for (i = 4; i >= 0; i--){  
    printf("%d", anum[i]);  
}  
printf("\nB = ");  
for (i = 4; i >= 0; i--){  
    printf("%d", bnum[i]);  
}  
printf("\nB' + 1 = ");  
for (i = 4; i >= 0; i--){  
    printf("%d", bcomp[i]);  
}  
printf("\n\n");  
for (i = 0; i < 5; i++){  
    if (anum[i] == q){//just shift for 00 or 11  
        printf("\n-->");  
        arshift();  
        q= anum[i];  
    }  
    else if(anum[i] == 1 && q == 0){//subtract and shift for 10  
        printf("\n-->");  
        printf("\nSUB B: ");
```



Vidyavardhini's College of Engineering and Technology

Department of Artificial Intelligence & Data Science

```
        add(bcomp);//add two's complement to implement subtraction
        arshift();
        q= anum[i];
    }
    else{//add ans shift for 01
        printf("\n-->");
        printf("\nADD B: ");
        add(bnum);
        arshift();
        q= anum[i];
    }
}

printf("\nProduct is = ");
for (i = 4; i >= 0; i--){
    printf("%d", pro[i]);
}
for (i = 4; i >= 0; i--){
    printf("%d", anumcp[i]);
}
}
```



Vidyavardhini's College of Engineering and Technology

Department of Artificial Intelligence & Data Science

Output:

```
BOOTH'S MULTIPLICATION ALGORITHM
Enter two numbers to multiply:
Both must be less than 16
Enter A: 5
Enter B: 2

Expected product = 10

Binary Equivalents are:
A = 00101
B = 00010
B'+ 1 = 11110

-->
SUB B: 11110:00101
AR-SHIFT: 11111:00010
-->
ADD B: 00001:00010
AR-SHIFT: 00000:10001
-->
SUB B: 11110:10001
AR-SHIFT: 11111:01000
-->
ADD B: 00001:01000
AR-SHIFT: 00000:10100
-->
AR-SHIFT: 00000:01010
Product is = 0000001010

...Program finished with exit code 1
Press ENTER to exit console.□
```

Conclusion -

Implementing Booth's algorithm in C provides an efficient method for multiplying binary numbers using signed integers. This algorithm reduces the complexity of multiplication by transforming the problem into a series of shifts and adds, leveraging the properties of binary arithmetic. By coding Booth's algorithm, you can effectively handle signed multiplication operations, which is particularly useful in low-level programming and digital systems design. The algorithm's systematic approach ensures that multiplication operations are performed accurately and efficiently, even when dealing with negative numbers.