




USB JACK
Micro Type B

S Signal

S Signal

D Signal

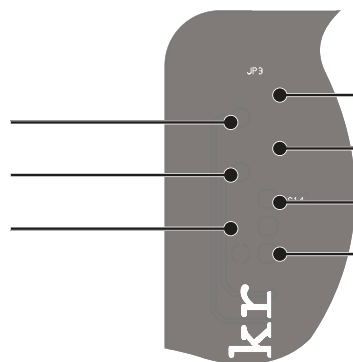

Enable TX Signal

Enable RX Signal

Enable VBATT Signal

Charge Current
With jumper 450mA without jumper 100mA

Internal Voltage Divider

