



FLIPPER ZERO GPIO

18-pin header, single row split 8 + 10,
17.78 mm gap, 58.42 mm pad 1 to pad 18.
Every pad carries a net and no power pin
is silenced with a no-connect flag.

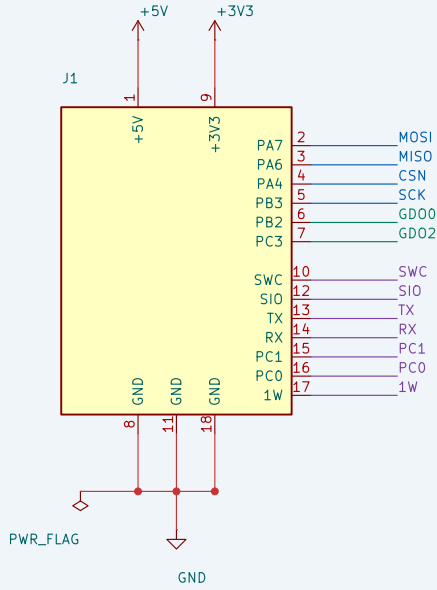

ESD PROTECTION


A rail-clamp array on every line a user can touch, split three ways so each clamp sits
within about two millimetres of its connector pin – the placement the part's own data
sheet asks for, and the exposure a GPIO carrier actually has (errata rework step 3).

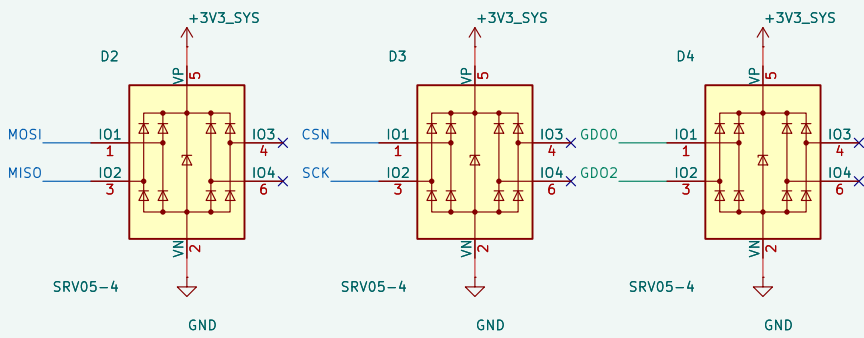

IO3 and IO4 of each array are spare, and are left unconnected.
SRV05-4: 8 steering diodes plus a TVS across the rail, about 3 pF per line.


CC1101 MODULE

Standard 8-pin CC1101 module on a 2x04 socket.
GD02 is brought out to Flipper pin 7 / PC3, which V1
left unused (errata FUNC.1).

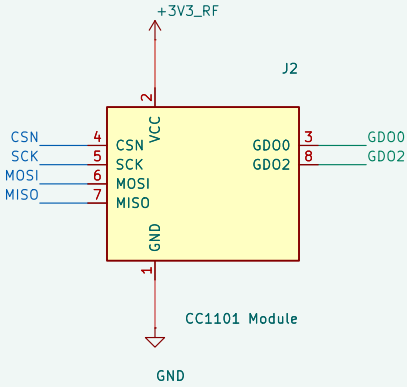

POWER

The radio runs straight off Flipper pin 9 (+3V3, 1.2 A available). No regulator and no zener:
the CC1101 is a 1.8–3.6 V part, and V1's LF33 had its input and output on one net while the
zener sat forward-biased across the rail (errata PWR.1, PWR.2, PWR.3, BOM.1).

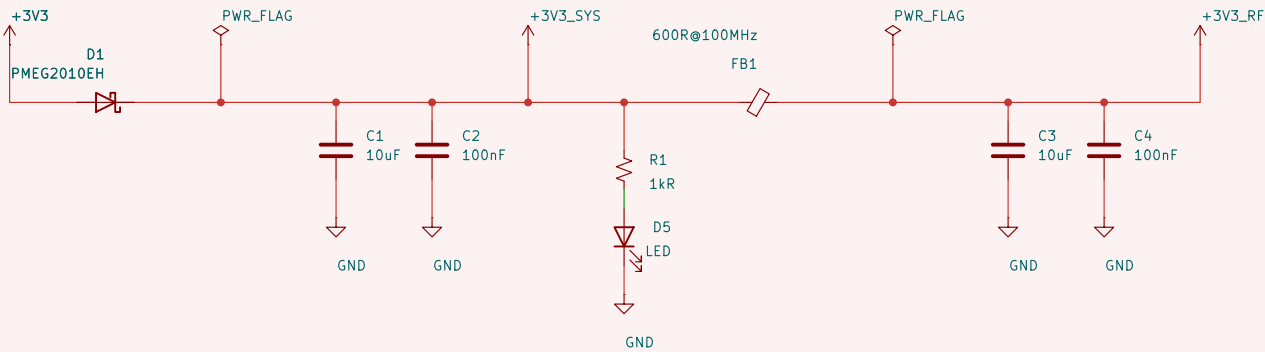

PROTOTYPING AREA AND SPARE-PIN BREAKOUT

50 pads on a true 2.54 mm grid in both axes as one footprint, with the two rails on real
nets so DRC can check them (errata MECH.1, SYNC.3). J4 breaks out the seven Flipper
signals the radio does not use, plus +5V and a ground return.

