


GOODJOHN / CPC464 USB KEYBOARD CARRIER

USB KEYBOARD ONLY – DISCONNECT CPC MOTHERBOARD, EVEN WHEN POWERED OFF.


Use J1 OR J2 + J3 for one keyboard. No CPC pass-through; no keyboard supply connection.

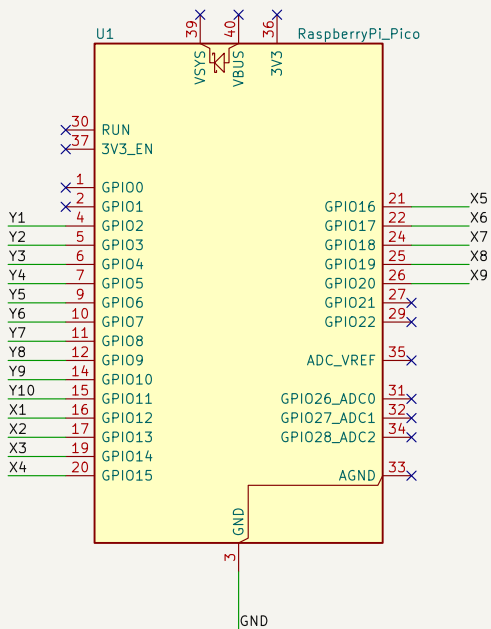


U1: original RP2040 Pico / Pico H on two 1x20 sockets.
PC USB data cable supplies power via the Pico USB socket.
Only GND is used on the carrier; VBUS / VSYS / 3V3 stay isolated.
GP2..GP11 scan Y1..Y10; GP12..GP20 sense X1..X9.
Unselected rows are inputs; X inputs use Pico pull-ups.

H1..H4: 3.2mm unplated holes for M3 standoffs.
All keyboard contacts are signals: never attach power or GND.
Prototype: electrical/design checks do not replace bench testing.



J1: INLINE 19 CONTACTS
rgbwalker V1.2 / Bread80 J3 / original PCB-style CPC464
Contact 1 = X9; optional keyboard contact 20 stays unused.

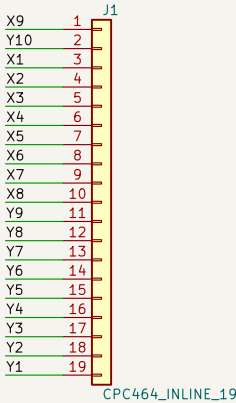

BREAD80 CPC464 SMT J1
J2 = A, odd keyboard pads 1..19
J3 = B, even keyboard pads 2..20



A10 / keyboard J1.19 is NC.
B10 / keyboard J1.20 is Y1.
LK1: 1-2; LK2: 1-2; LK3 open.
Bonus links open.



Disconnect keyboard from CPC motherboard, even when CPC is off
RP2040 Pico only – USB keyboard use only

salvogendut / Goodjohn

Sheet: /
File: goodjohn-carrier.kicad_sch

Title: Goodjohn – CPC464 USB keyboard carrier

Size: A4 Date: 2026-10-06

KiCad E.D.A. 10.0.6

Rev: 1.0-prototype

Id: 1/1