



POWER FROM WITHIN

GUIDA TECNICA
POTENZE

RATINGS BOOK

TECHNICAL GUIDE

Ratings Definitions.....	05
Dynamic Data Support.....	05
Environmental Considerations.....	06
International Protection IP Ratings.....	07



ECO & ECP Brushless Alternators with AVR 50 or 60Hz 1Phase or 3Phase **4 Pole Industrial** | ECO & ECP /4

4 Pole 50Hz Ratings

400V 4 Pole 50Hz 3Phase AVR Controlled 1500rpm Standard.....	08
380V 4 Pole 50Hz 3Phase AVR Controlled 1500rpm Standard.....	10
415V 4 Pole 50Hz 3Phase AVR Controlled 1500rpm Standard.....	12
415V 4 Pole 50Hz 3Phase AVR Controlled 1500rpm Broad Voltage.....	14
440V 4 Pole 50Hz 3Phase AVR Controlled 1500rpm Standard.....	16
220V-230V-240V 4 Pole 50Hz 1Phase 1 P.F. AVR Controlled 1500rpm Reconnected.....	18
220V-230V-240V 4 Pole 50Hz 1Phase 0.8 P.F. AVR Controlled 1500rpm Reconnected.....	20
230V 4 Pole 50Hz 1Phase 1 P.F. AVR Controlled 1500rpm Dedicated.....	22
230V 4 Pole 50Hz 1Phase 0.8 P.F. AVR Controlled 1500rpm Dedicated.....	23

4 Pole 60Hz Ratings

480V 4 Pole 60Hz 3Phase AVR Controlled 1800rpm Standard.....	24
460V 4 Pole 60Hz 3Phase AVR Controlled 1800rpm Standard.....	26
440V 4 Pole 60Hz 3Phase AVR Controlled 1800rpm Standard.....	28
415V 4 Pole 60Hz 3Phase AVR Controlled 1800rpm Standard.....	30
415V 4 Pole 60Hz 3Phase AVR Controlled 1800rpm Broad Voltage.....	32
400V 4 Pole 60Hz 3Phase AVR Controlled 1800rpm Standard.....	34
380V 4 Pole 60Hz 3Phase AVR Controlled 1800rpm Standard.....	36
380V 4 Pole 60Hz 3Phase AVR Controlled 1800rpm Dedicated.....	38
600V 4 Pole 60Hz 3Phase AVR Controlled 1800rpm Dedicated.....	40
690V 4 Pole 60Hz 3Phase AVR Controlled 1800rpm Dedicated.....	42
220V-230V-240V 4 Pole 60Hz 1Phase 1 P.F. AVR Controlled 1800rpm Reconnected.....	44
220V-230V-240V 4 Pole 60Hz 1Phase 0.8 P.F. AVR Controlled 1800rpm Reconnected.....	46
240V 4 Pole 60Hz 1Phase 1 P.F. AVR Controlled 1800rpm Dedicated.....	48
240V 4 Pole 60Hz 1Phase 0.8 P.F. AVR Controlled 1800rpm Dedicated.....	49



ECO & ECP Brushless Alternator with AVR 50 or 60Hz 1Phase or 3Phase **4 Pole Marine** | ECO & ECP

For marine Alternator Range please refer to Marine Brochure



Power Products Brushless Alternator with AVR **1-5,000kVA** | Medium or High Voltage

For Power Products Alternator Range please refer to Power Products Quick Selection Guide

Contents (Continued)



LT3N Brushless Alternators
with Capacitor 50 or 60Hz 1Phase
Lighting Tower | LT3N

LT3N Lighting Tower Style 2 and 4 pole **50**



NPE Brushless Alternators
with AVR 50 or 60Hz 1Phase or 3Phase
Space Saver | NPE

NPE Alternator Range **from 51 to 53**



TE34 IP54 Brushless Alternators with AVR 50 or 60Hz
Totally Enclosed | TE34

Totally Enclosed Alternators **54**



400Hz Brushless Alternators with
AVR 50 or 60Hz 1Phase or 3Phase
400Hz | HC

HC Alternator 14/20/24 Pole 400Hz **55**



ECO & ECP Brushless Alternators
with AVR 50 or 60Hz 1Phase or 3Phase
2 Pole Industrial | ECO ECP /2

2 Pole Industrial Ratings **from 56 to 61**



S15, S16 & S20 Brushless Alternators with Capacitor and
Optional AVR or Brushed with AVR, 50 or 60Hz
2 Pole Portable 1Ph | S15, S16, S20 | ES16W, ES16F, ES20

2 Pole Portable Ratings Single Phase **62**



T16 & T20 Brushed Alternators with Transformer
or Brushed with AVR, 50 or 60Hz
2 Pole Portable 3Ph | T16, T20 | ET16F, ET20F

2 Pole Portable Ratings Three Phase **63**

Permanent magnet generator with AC/AC inverter,
or DC in fixed or variable speed applications
Multi Pole PMG | AC Output | DC Output

PMG ratings **from 64 to 71**

Additional Information

Wiring Connection Diagram **72**

SAE Coupling and Mounting Guide **74**

Infographic Icons Summary **75**

Rating Definitions

Emergency Standby Power (ESP)

Emergency standby power is defined as the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers.

Limited-time running power (LTP)

Limited-time running power is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500 h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers.

The 10% overload is not available at ESP and LTP ratings.

In the 'Ratings Book' you can find ESP or LTP ratings for:

- ▶ **150°/40°:** Peak continuous ratings according to ISO8528-3.
- ▶ **163°/27°:** Emergency peak continuous rating, not defined in ISO specification. Suitable for stand-by sizing only.

Prime Rated Power (PRP)

Prime power is defined as being the maximum power which a generating set is capable of delivering continuously while supplying a variable electrical load with an average load $\leq 70\%$, when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. A 10% overload power is permitted for a period of one hour with or without interruptions, within 6 hours of operation; in these conditions the generator insulation system can age thermally faster.

Continuous Operating Power (COP)

Continuous power is defined as being the maximum power which the generating set is capable of delivering continuously while supplying a constant electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. Long term overload on this rating is not allowed.

In the 'Ratings Book' you can find PRP or COP ratings for:

- ▶ **80°/40°:** this condition is equivalent to Class B temperature rise.
- ▶ **105°/40°:** this condition is equivalent to Class F temperature rise.
- ▶ **125°/40°:** this condition is equivalent to Class H temperature rise.

	Emergency Standby Power (ESP)	Limited-Time Running Power (LTP)	Prime Rated Power (PRP)	Continuous Operating Power (COP)
Duty Cycle (EN 60034-1)	S10	S10	S1	S1
Annual operating hours	≤ 200 hours	≤ 500 hours	Unlimited	Unlimited
Load Type	Variable	Undefined	Variable	Constant
Average Load	$\leq 70\%$	$\leq 100\%$	$\leq 70\%$	$\leq 100\%$
Overload	No	No	10% -1hour/6hours	No


Dynamic Data Support

Please note, for the very latest ratings, you are advised to go to the Mecc Alte website support area: **support.meccalte.com**

Here you will find our dynamic technical data sheet builder, where you can create your own bespoke data sheet. Following a simple step-by-step process, you can get the information in a format that matches your application and requirement. Picking from a number of variances, you are guided through selection of:

- ▶ Frequency
- ▶ Winding
- ▶ Phase Number
- ▶ Voltage
- ▶ Ambient Temperature
- ▶ Temperature Rise
- ▶ Altitude
- ▶ International Protection (IP) Level

After selecting your chosen data, the data is automatically calculated and you are emailed a customised data sheet showing performance at your specified variants.



Altitude Derations/Environmental

Temperature and Altitude

Temperature and altitude – individually or combined, have an effect on the generator power available. Temperature may be considered as both the air inlet to the generator and also the ambient air around the generator. When the ambient air or air entering the generator exceeds 40°C, or 104° F, it becomes necessary to derate the output of the generator.

The chart below gives the recommended amount to adjust for the higher temperatures.

Higher altitudes also require a derate, specifically when it exceeds 3300 ft., or 1000 Meters. Again, please refer to the Altitude Deration Chart below to determine the necessary derate.

Altitude & Ambient Temperature Deration Coefficients

Altitude (meters)	Ambient Temperature (°C)							
	25	40	45	50	55	60	65	70
≤ 1 000	1.07	1	0.96	0.93	0.91	0.89	0.85	0.82
> 1000 ≤ 1500	1.01	0.96	0.92	0.89	0.87	0.84	0.81	0.77
> 1500 ≤ 2000	0.96	0.91	0.87	0.84	0.83	0.79	0.77	0.73
> 2000 ≤ 3000	0.90	0.85	0.81	0.78	0.76	0.73	0.71	0.68
> 3000 ≤ 4000	0.84	0.78	0.75	0.73	0.70	0.68	0.66	0.62
> 4000 ≤ 5000	0.78	0.72	0.69	0.67	0.65	0.62	0.59	0.56
> 5000 ≤ 6000	0.70	0.65	0.63	0.61	0.58	0.55	0.53	0.50

Environmental Concerns

Generators often operate in harsh environments where airborne contaminants—such as sand, dust, salt, or chemicals—can enter the machine, causing abrasion and insulation degradation. To protect against these risks, Mecc Alte uses premium Class H insulation (180°C max) and advanced impregnation methods like VPI, dip, roll, or trickle techniques. These are effective for most applications, but harsher conditions may require enhanced protection systems. use of filters requires a strict maintenance regime.

Additional critical factors include:

- Vibration: Isolation from external sources and torsional compatibility to avoid harmful resonances.
- Electrical Stress: Voltage spikes or current surges may damage insulation by bridging dielectric gaps.
- Contamination: Once pollutants enter, internal protection of windings may be more effective than raising the IP rating.
- Ingress Protection: Options range from IP23 (standard and with filters) up to IP45 and IP54.
- Thermal Impact: Continuous operation at 180°C reduces insulation life to ~20,000 hours, while Class F (155°C) extends life to ~120,000 hours and Class B (120°C) up to ~640,000 hours (UL guidance).

Filters improve protection but require regular maintenance to avoid airflow restrictions and overheating. Mecc Alte offers multiple insulation systems (Standard, Standard+, Grey, Grey+, Total+) tailored to specific environments. For details, refer to our Insulation Protection Systems Guide or consult your Mecc Alte representative. https://www.meccalte.com/downloads/Insulation_system.pdf

Humidity and Moisture

Another common enemy of the insulation system is high humidity, salt air and moisture. While the windings are certainly protected against these conditions, space heaters can be added insurance to promote long life and trouble free operation. The location of the unit and operating conditions with proper ventilation are both important considerations when determining what protection is required. Once again, please consult your Mecc Alte Representative for assistance in selecting proper protection and modification.


Altitude Derations/Environmental

International Protection IP Ratings

The EN60034-5 applies to the classification of degrees of protection provided by enclosures for rotating electrical machines. The object of EN60034-5 is to describe:

- ▶ Definitions for standard degrees of protection provided by enclosures applicable to rotating electrical machines as regards:
 1. protection of persons against contacts with or approach to live parts and against contact with moving parts (other than smooth rotating shafts and the like) inside the enclosure and protection of the machine against ingress of solid foreign objects;
 2. protection of machines against the harmful effects due to the ingress of water;
- ▶ Designations for these protective degrees.
- ▶ Tests to be performed to check that machines meet the requirements of this standard.

The designation used for the degree of protection consists of the letters IP followed by two characteristic numerals signifying conformity:

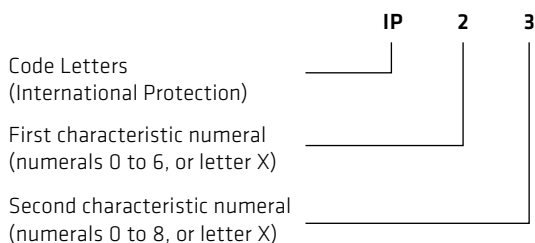

When it is required to indicate a degree of protection by only one characteristics numeral, the omitted numeral shall be replaced by the letter X, for example IPX5 or IP2X.

Additional information may be indicated by a supplementary letter following the second characteristics numeral. If more than one letter is used, the alphabetic sequence shall apply.

In special applications (such as machines with open circuit cooling for ship deck installation with air inlet and outlet openings closed during standstill) numerals may be followed by a letter indicating whether the protection against harmful effects due to ingress of water was verified or tested for the

machine not running (letter S) or the machine running (letter M). In this case the degree of protection in either state of the machine shall be indicated, for example IP55S/IP20M.

The absence of the letters S and M shall imply that the intended degree of protection will be provided under all normal conditions of use.

First characteristic numeral

IP	Protection
0X	Non-protected machine
1X	Solid objects greater than 50mm
2X	Solid objects greater than 12mm
3X	Solid objects greater than 2.5mm
4X	Solid objects greater than 1mm
5X	Dust-protected

Second characteristic numeral

IP	Protection
X0	Non-protected machine
X1	Dripping water
X2	Dripping water when tilted up to 15°
X3	Spraying water
X4	Splashing water
X5	Water jets
X6	Heavy seas
X7	Effects of immersion
X8	Continuous submersion

Mecc Alte offers IP23 across its industrial range. Upgrades are available such as IP23 DP, or upwards; in fact, the whole 4 pole industrial range can be upgraded to IP45 with the fitting of additional IP filter kits. However, when protecting against ingress, the airflow and cooling is impacted.

All information are available in our IP Bulletin:
https://www.meccalte.com/downloads/MA0605_Bulletin_IP.pdf



4 Pole | 400V

50 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 115 / 200 / 230 / 400 Volts
Winding: Standard
RPM: 1500
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP3 1S4 C	12	M2K	7	6,8	6,5	6	5,2
ECP3 2S4 C	12	M2K	8,8	8,3	8	7,5	6,4
ECP3 1L4 C	12	M2K	11,8	11,4	11	10	8,8
ECP3 2L4 C	12	M2K	14,5	14	13,5	12,5	10,8
ECP3 3L4 C	12	M2K	16	15,5	15	14	12
ECP4 1M4 C	12	M2K	7,1	6,8	6,5	6	5,2
ECP4 2M4 C	12	M2K	8,8	8,3	8	7,5	6,4
ECP4 3M4 C	12	M2K	11	10,3	10	9,1	8
ECP4 4M4 C	12	M2K	13,7	13	12,5	11,6	10
ECP4 5M4 C	12	M2K	16,5	15,4	15	14,1	12
ECP4 1L4 C	12	M2K	20	18,5	18	17	14,4
ECP4 2L4 C	12	M2K	22	20,5	20	18,5	16
ECP28 1VS4 C	12	M2K	8,2	7,7	7,5	6,7	6
ECP28 2VS4 C	12	M2K	11	10,3	10	9,1	8
ECP28 1S4 C	12	M2K	13,7	13	12,5	11,6	10
ECP28 2S4 C	12	M2K	16,5	15,4	15	14,1	12
ECP28 3S4 C	12	M2K	19,2	18	17,5	16,5	14
ECP28 M4 C	12	M2K	22	20,5	20	18,5	16
ECP28 L4 C	12	M2K	27,5	25,5	25	23	20
ECP28 VL4 C	12	M2K	33	30,5	30	26	24
ECP30 1M4 C	12	M2K	22	20,5	20	18,5	16
ECP30 2M4 C	12	M2K	27,5	25,5	25	23	20
ECP30 3M4 C	12	M2K	33	30,5	30	26	24
ECP30 1L4 C	12	M2K	38,5	35,6	35	30,3	28
ECP30 2L4 C	12	M2K	44	40,7	40	34,7	32
ECP30 3L4 C	12	M2K	46,8	44,5	43,8	37,9	35
ECP32 1S4 C	12	M2K	41	39	37,5	35	30
ECP32 2S4 C	12	M2K	50	48,7	45	41	36
ECP32 1M4 C	12	M2K	55	52,5	50	48	40
ECP32 2M4 C	12	M2K	68,8	65	62,5	59,5	50
ECP32 1L4 C	12	M2K	82,5	78	75	67	60
ECP32 2L4 C	12	M2K	91	85	82,5	73,2	66
ECP34 1S4 C	12	M2K	96	93	87,5	79	70
ECP34 2S4 C	12	M2K	110	105	100	90	80
ECP34 1M4 C	12	M2K	137	132	125	112	100
ECP34 2M4 C	12	M2K	148	143	135	121	108
ECP34 1L4 C	12	M2K	165	158	150	136	120
ECP34 2L4 C	12	M2K	181	174	165	149	132
ECO38 1S4 C	12	M2K	196	188	180	170	144
ECO38 2S4 C	12	M2K	220	211	200	185	160
ECO38 1M4 C	12	M2K	250	237	225	207	180
ECO38 2M4 C	12	M2K	275	264	250	230	200
ECO38 1L4 C	12	M2K	330	315	300	275	240
ECO38 2L4 C	12	M2K	370	360	350	320	280
ECO38 VL4 C	12	M2K	400	380	370	338	296

115 Δ Δ / 200 Δ Δ / 230 Δ Δ / 400 Δ Δ Volts

MECCALTE INDUSTRIAL

4 Pole | 400V

50 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 230 / 400 / 460 / 800 Volts
Winding: Standard
RPM: 1500
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
EC040 1S4 C	12	M3K	440	417	400	370	320
EC040 2S4 C	12	M3K	491	468	450	410	360
EC040 3S4 C	12	M3K	550	521	500	450	400
EC040 1L4 C	12	M3K	601	567	550	500	440
EC040 2L4 C	12	M3K	675	645	625	564	500
EC040 3L4 C	12	M3K	735	700	680	630	544
EC040 VL4 C	12	M3K	825	777	750	690	600
EC043 1S4 A	12	M3K	900	860	820	750	655
EC043 2S4 A	12	M3K	1016	975	930	850	744
EC043 1M4 A	12	M3K	1125	1070	1025	950	820
EC043 2M4 A	12	M3K	1250	1200	1150	1050	920
EC043 2L4 A	12	M3K	1420	1358	1300	1200	1040
EC043 VL4 A	12	M3K	1540	1500	1400	1280	1120
EC046 1S4 A	12	M3K	1650	1552	1500	1350	1200
EC046 1.5S4 A	12	M3K	1800	1700	1650	1480	1320
EC046 2S4 A	12	M3K	1944	1863	1800	1600	1440
EC046 1L4 A	12	M3K	2268	2173	2100	1900	1680
EC046 1.5L4 A	12	M3K	2500	2380	2300	2050	1840
EC046 2L4 A	12	M3K	2700	2588	2500	2250	2000
EC046 VL4 A	12	M3K	3024	2899	2800	2500	2240
EC047LV 1S4 B	4	M3Ks-HD	3300	3162	3056	2750	2444
EC047LV 2S4 B	4	M3Ks-HD	3510	3362	3250	2924	2600
EC047LV 2M4 B	4	M3Ks-HD	3780	3622	3500	3150	2800
EC047LV 1L4 B	4	M3Ks-HD	4460	4274	4130	3716	3304

230 Δ Δ / 400 Δ Δ / 460 Δ Δ / 800 Δ Δ Volts

MECCALTE INDUSTRIAL

2 OF 2

"All machines have 300% short circuit capability.

On ECP3-ECO46 range the voltage regulator is feeded by auxiliary winding.

On ECO47 the voltage regulator is feeded by PMG.

Indicated rating references to series or parallel star connection as published table.

On ECO40, ECO43, ECO46 and ECO47 the standard connection is parallel star. For any different configuration please consult Meccalte representative".

4 Pole | 380V

50 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 110 / 190 / 220 / 380 Volts
Winding: Standard
RPM: 1500
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP3 1S4 C	12	M2K	7	6,8	6,5	6	5,2
ECP3 2S4 C	12	M2K	8,8	8,3	8	7,5	6,4
ECP3 1L4 C	12	M2K	11,8	11,4	11	10	8,8
ECP3 2L4 C	12	M2K	14,5	14	13,5	12,5	10,8
ECP3 3L4 C	12	M2K	16	15,5	15	14	12
ECP4 1M4 C	12	M2K	7,1	6,8	6,5	6	5,2
ECP4 2M4 C	12	M2K	8,8	8,3	8	7,5	6,4
ECP4 3M4 C	12	M2K	11	10,3	10	9,1	8
ECP4 4M4 C	12	M2K	13,7	13	12,5	11,6	10
ECP4 5M4 C	12	M2K	16,5	15,4	15	14,1	12
ECP4 1L4 C	12	M2K	20	18,5	18	17	14,4
ECP4 2L4 C	12	M2K	22	20,5	20	18,5	16
ECP28 1VS4 C	12	M2K	8,2	7,7	7,5	6,7	6
ECP28 2VS4 C	12	M2K	11	10,3	10	9,1	8
ECP28 1S4 C	12	M2K	13,7	13	12,5	11,6	10
ECP28 2S4 C	12	M2K	16,5	15,4	15	14,1	12
ECP28 3S4 C	12	M2K	19,2	18	17,5	16,5	14
ECP28 M4 C	12	M2K	22	20,5	20	18,5	16
ECP28 L4 C	12	M2K	27,5	25,5	25	23	20
ECP28 VL4 C	12	M2K	33	30,5	30	26	24
ECP30 1M4 C	12	M2K	22	20,5	20	18,5	16
ECP30 2M4 C	12	M2K	27,5	25,5	25	23	20
ECP30 3M4 C	12	M2K	33	30,5	30	26	24
ECP30 1L4 C	12	M2K	38,5	35,6	35	30,3	28
ECP30 2L4 C	12	M2K	44	40,7	40	34,7	32
ECP30 3L4 C	12	M2K	47	44,5	44	37,9	35
ECP32 1S4 C	12	M2K	41	39	37,5	35	30
ECP32 2S4 C	12	M2K	50	48,7	45	41	36
ECP32 1M4 C	12	M2K	55	52,5	50	48	40
ECP32 2M4 C	12	M2K	68,8	65	62,5	59,5	50
ECP32 1L4 C	12	M2K	82,5	78	75	67	60
ECP32 2L4 C	12	M2K	91	85	82,5	73,2	66
ECP34 1S4 C	12	M2K	96	93	87,5	79	70
ECP34 2S4 C	12	M2K	110	105	100	90	80
ECP34 1M4 C	12	M2K	137	132	125	112	100
ECP34 2M4 C	12	M2K	148	143	135	121	108
ECP34 1L4 C	12	M2K	165	158	150	136	120
ECP34 2L4 C	12	M2K	176	169	160	144	128
ECO38 1S4 C	12	M2K	196	188	180	170	144
ECO38 2S4 C	12	M2K	220	211	200	185	160
ECO38 1M4 C	12	M2K	250	237	225	207	180
ECO38 2M4 C	12	M2K	275	264	250	230	200
ECO38 1L4 C	12	M2K	330	315	300	275	240
ECO38 2L4 C	12	M2K	370	360	350	320	280
ECO38 VL4 C	12	M2K	380	370	360	329	288

110 Δ Δ / 190 Δ Δ / 220 Δ Δ / 380 Δ Δ Volts

MECCALTE INDUSTRIAL

4 Pole | 380V

50 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 220 / 380 / 440 / 760 Volts
Winding: Standard
RPM: 1500
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
EC040 1S4 C	12	M3K	440	417	400	370	320
EC040 2S4 C	12	M3K	491	468	450	410	360
EC040 3S4 C	12	M3K	550	521	500	450	400
EC040 1L4 C	12	M3K	601	567	550	500	440
EC040 2L4 C	12	M3K	675	645	625	564	500
EC040 3L4 C	12	M3K	735	700	680	630	544
EC040 VL4 C	12	M3K	825	777	750	690	600
EC043 1S4 A	12	M3K	900	860	820	750	655
EC043 2S4 A	12	M3K	1016	975	930	850	744
EC043 1M4 A	12	M3K	1125	1070	1025	950	820
EC043 2M4 A	12	M3K	1250	1200	1150	1050	920
EC043 2L4 A	12	M3K	1420	1358	1300	1200	1040
EC043 VL4 A	12	M3K	1540	1500	1400	1280	1120
EC046 1S4 A	12	M3K	1650	1552	1500	1350	1200
EC046 1.5S4 A	12	M3K	1800	1700	1650	1480	1320
EC046 2S4 A	12	M3K	1944	1863	1800	1600	1440
EC046 1L4 A	12	M3K	2268	2173	2100	1900	1680
EC046 1.5L4 A	12	M3K	2500	2380	2300	2050	1840
EC046 2L4 A	12	M3K	2700	2588	2500	2250	2000
EC046 VL4 A	12	M3K	3024	2899	2800	2500	2240
EC047LV 1S4 B	4	M3Ks-HD	3300	3162	3056	2750	2444
EC047LV 2S4 B	4	M3Ks-HD	3510	3362	3250	2924	2600
EC047LV 2M4 B	4	M3Ks-HD	3780	3622	3500	3150	2800
EC047LV 1L4 B	4	M3Ks-HD	4460	4274	4130	3716	3304

220 Δ Δ / 380 Λ Λ / 440 Δ / 760 Λ Volts

MECCALTE INDUSTRIAL

2 OF 2

"All machines have 300% short circuit capability.

On ECP3-ECO46 range the voltage regulator is feeded by auxiliary winding.

On ECO47 the voltage regulator is feeded by PMG.

Indicated rating references to series or parallel star connection as published table.

On ECO40, ECO43, ECO46 and ECO47 the standard connection is parallel star. For any different configuration please consult Meccalte representative".

4 Pole | 415V

50 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 120 / 208 / 240 / 415 Volts
Winding: Standard
RPM: 1500
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP3 1S4 C	12	M2K	7	6,8	6,5	6	5,2
ECP3 2S4 C	12	M2K	8,8	8,3	8	7,5	6,4
ECP3 1L4 C	12	M2K	11,8	11,4	11	10	8,8
ECP3 2L4 C	12	M2K	14,5	14	13,5	12,5	10,8
ECP3 3L4 C	12	M2K	16	15,5	15	14	12
ECP4 1M4 C	12	M2K	7,1	6,8	6,5	6	5,2
ECP4 2M4 C	12	M2K	8,8	8,3	8	7,5	6,4
ECP4 3M4 C	12	M2K	11	10,3	10	9,1	8
ECP4 4M4 C	12	M2K	13,7	13	12,5	11,6	10
ECP4 5M4 C	12	M2K	16,5	15,4	15	14,1	12
ECP4 1L4 C	12	M2K	20	18,5	18	17	14,4
ECP4 2L4 C	12	M2K	22	20,5	20	18,5	16
ECP28 1VS4 C	12	M2K	8,2	7,7	7,5	6,7	6
ECP28 2VS4 C	12	M2K	11	10,3	10	9,1	8
ECP28 1S4 C	12	M2K	13,7	13	12,5	11,6	10
ECP28 2S4 C	12	M2K	16,5	15,4	15	14,1	12
ECP28 3S4 C	12	M2K	19,2	18	17,5	16,5	14
ECP28 M4 C	12	M2K	22	20,5	20	18,5	16
ECP28 L4 C	12	M2K	27,5	25,5	25	23	20
ECP28 VL4 C	12	M2K	33	30,5	30	26	24
ECP30 1M4 C	12	M2K	22	20,5	20	18,5	16
ECP30 2M4 C	12	M2K	27,5	25,5	25	23	20
ECP30 3M4 C	12	M2K	33	30,5	30	26	24
ECP30 1L4 C	12	M2K	38,5	35,6	35	30,3	28
ECP30 2L4 C	12	M2K	44	40,7	40	34,7	32
ECP30 3L4 C	12	M2K	46,8	44,5	43,8	37,9	35
ECP32 1S4 C	12	M2K	41	39	37,5	35	30
ECP32 2S4 C	12	M2K	46	45	42	39	34
ECP32 1M4 C	12	M2K	55	52,5	50	48	40
ECP32 2M4 C	12	M2K	68,8	65	62,5	59,5	50
ECP32 1L4 C	12	M2K	82,5	78	75	67	60
ECP32 2L4 C	12	M2K	91	85	82,5	73,2	66
ECP34 1S4 C	12	M2K	96	93	87,5	79	70
ECP34 2S4 C	12	M2K	110	105	100	90	80
ECP34 1M4 C	12	M2K	137	132	125	112	100
ECP34 2M4 C	12	M2K	148	143	135	121	108
ECP34 1L4 C	12	M2K	165	158	150	136	120
ECP34 2L4 C	12	M2K	181	174	165	149	132
ECO38 1S4 C	12	M2K	196	188	180	170	144
ECO38 2S4 C	12	M2K	220	211	200	185	160
ECO38 1M4 C	12	M2K	250	237	225	207	180
ECO38 2M4 C	12	M2K	275	264	250	230	200
ECO38 1L4 C	12	M2K	330	315	300	275	240
ECO38 2L4 C	12	M2K	370	360	350	320	280
ECO38 VL4 C	12	M2K	400	380	370	338	296

120 Δ Δ / 208 Δ Δ / 240 Δ / 415 Δ Volts

MECC ALTE INDUSTRIAL

4 Pole | 415V

50 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 240 / 415 / 480 / 830 Volts
Winding: Standard
RPM: 1500
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECO40 1S4 C	12	M3K	440	417	400	370	320
ECO40 2S4 C	12	M3K	491	468	450	410	360
ECO40 3S4 C	12	M3K	550	521	500	450	400
ECO40 1L4 C	12	M3K	590	557	540	490	432
ECO40 2L4 C	12	M3K	675	645	625	564	500
ECO40 3L4 C	12	M3K	735	700	680	630	544
ECO40 VL4 C	12	M3K	825	777	750	690	600
ECO43 1S4 A	12	M3K	900	860	820	750	655
ECO43 2S4 A	12	M3K	1016	975	930	850	744
ECO43 1M4 A	12	M3K	1125	1070	1025	950	820
ECO43 2M4 A	12	M3K	1140	1096	1050	960	840
ECO43 2L4 A	12	M3K	1420	1358	1300	1200	1040
ECO43 VL4 A	12	M3K	1540	1500	1400	1280	1120
ECO46 1S4 A	12	M3K	1650	1552	1500	1350	1200
ECO46 1.5S4 A	12	M3K	1800	1700	1650	1480	1320
ECO46 2S4 A	12	M3K	1944	1863	1800	1600	1440
ECO46 1L4 A	12	M3K	2268	2173	2100	1900	1680
ECO46 1.5L4 A	12	M3K	2500	2380	2300	2050	1840
ECO46 2L4 A	12	M3K	2700	2588	2500	2250	2000
ECO46 VL4 A	12	M3K	2916	2795	2700	2400	2160
ECO47LV 1S4 B	4	M3Ks-HD	3128	2998	2898	2606	2318
ECO47LV 2S4 B	4	M3Ks-HD	3334	3194	3088	2778	2470
ECO47LV 2M4 B	4	M3Ks-HD	3590	3440	3325	3000	2660
ECO47LV 1L4 B	4	M3Ks-HD	4236	4060	3924	3530	3138

240 Δ Δ / 415 Λ Λ / 480 Δ / 830 Λ Volts

MECCALTE INDUSTRIAL

2 OF 2

"All machines have 300% short circuit capability.

On ECP3-ECO46 range the voltage regulator is feeded by auxiliary winding.

On ECO47 the voltage regulator is feeded by PMG.

Indicated rating refences to series or parallel star connection as published table.

On ECO40, ECO43, ECO46 and ECO47 the standard connection is parallel star. For any different configuration please consult Meccalte representative".

4 Pole | 380V - 400V - 415V

50 Hz | 3 Phase | 0.8 PF | AVR Controlled

Winding: Standard
RPM: 1500
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP3 1S4 C	12	M2K	7	6,8	6,5	6	5,2
ECP3 2S4 C	12	M2K	8,8	8,3	8	7,5	6,4
ECP3 1L4 C	12	M2K	11,8	11,4	11	10	8,8
ECP3 2L4 C	12	M2K	14,5	14	13,5	12,5	10,8
ECP3 3L4 C	12	M2K	16	15,5	15	14	12
ECP4 1M4 C	12	M2K	7,1	6,8	6,5	6	5,2
ECP4 2M4 C	12	M2K	8,8	8,3	8	7,5	6,4
ECP4 3M4 C	12	M2K	11	10,3	10	9,1	8
ECP4 4M4 C	12	M2K	13,7	13	12,5	11,6	10
ECP4 5M4 C	12	M2K	16,5	15,4	15	14,1	12
ECP4 1L4 C	12	M2K	20	18,5	18	17	14,4
ECP4 2L4 C	12	M2K	22	20,5	20	18,5	16
ECP28 1VS4 C	12	M2K	8,2	7,7	7,5	6,7	6
ECP28 2VS4 C	12	M2K	11	10,3	10	9,1	8
ECP28 1S4 C	12	M2K	13,7	13	12,5	11,6	10
ECP28 2S4 C	12	M2K	16,5	15,4	15	14,1	12
ECP28 3S4 C	12	M2K	19,2	18	17,5	16,5	14
ECP28 M4 C	12	M2K	22	20,5	20	18,5	16
ECP28 L4 C	12	M2K	27,5	25,5	25	23	20
ECP28 VL4 C	12	M2K	33	30,5	30	26	24
ECP30 1M4 C	12	M2K	22	20,5	20	18,5	16
ECP30 2M4 C	12	M2K	27,5	25,5	25	23	20
ECP30 3M4 C	12	M2K	33	30,5	30	26	24
ECP30 1L4 C	12	M2K	38,5	35,6	35	30,3	28
ECP30 2L4 C	12	M2K	44	40,7	40	34,7	32
ECP30 3L4 C	12	M2K	46,8	44,5	43,8	37,9	35
ECP32 1S4 C	12	M2K	41	39	37,5	35	30
ECP32 2S4 C	12	M2K	46	45	42	39	34
ECP32 1M4 C	12	M2K	55	52,5	50	48	40
ECP32 2M4 C	12	M2K	68,8	65	62,5	59,5	50
ECP32 1L4 C	12	M2K	82,5	78	75	67	60
ECP32 2L4 C	12	M2K	91	85	82,5	73,2	66
ECP34 1S4 C	12	M2K	96	93	87,5	79	70
ECP34 2S4 C	12	M2K	110	105	100	90	80
ECP34 1M4 C	12	M2K	137	132	125	112	100
ECP34 2M4 C	12	M2K	148	143	135	121	108
ECP34 1L4 C	12	M2K	165	158	150	136	120
ECP34 2L4 C	12	M2K	181	174	165	149	132
ECO38 1S4 C	12	M2K	196	188	180	170	144
ECO38 2S4 C	12	M2K	220	211	200	185	160
ECO38 1M4 C	12	M2K	250	237	225	207	180
ECO38 2M4 C	12	M2K	275	264	250	230	200
ECO38 1L4 C	12	M2K	330	315	300	275	240
ECO38 2L4 C	12	M2K	370	360	350	320	280
ECO38 VL4 C	12	M2K	400	380	370	338	296

4 Pole | 380V - 400V - 415V

50 Hz | 3 Phase | 0.8 PF | AVR Controlled

Winding: Standard
RPM: 1500
Insulation: Class H



MECCALTE INDUSTRIAL

MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECO40 1S4 C	12	M3K	440	417	400	370	320
ECO40 2S4 C	12	M3K	491	468	450	410	360
ECO40 3S4 C	12	M3K	550	521	500	450	400
ECO40 1L4 C	12	M3K	590	557	540	490	432
ECO40 2L4 C	12	M3K	675	645	625	564	500
ECO40 3L4 C	12	M3K	735	700	680	630	544
ECO40 VL4 C	12	M3K	825	777	750	690	600
ECO43 1S4 A	12	M3K	900	860	820	750	655
ECO43 2S4 A	12	M3K	1016	975	930	850	744
ECO43 1M4 A	12	M3K	1125	1070	1025	950	820
ECO43 2M4 A	12	M3K	1140	1096	1050	960	840
ECO43 2L4 A	12	M3K	1420	1358	1300	1200	1040
ECO43 VL4 A	12	M3K	1540	1500	1400	1280	1120
ECO46 1S4 A	12	M3K	1650	1552	1500	1350	1200
ECO46 1.5S4 A	12	M3K	1800	1700	1650	1480	1320
ECO46 2S4 A	12	M3K	1944	1863	1800	1600	1440
ECO46 1L4 A	12	M3K	2268	2173	2100	1900	1680
ECO46 1.5L4 A	12	M3K	2500	2380	2300	2050	1840
ECO46 2L4 A	12	M3K	2700	2588	2500	2250	2000
ECO46 VL4 A	12	M3K	2916	2795	2700	2400	2160
ECO47LV 1S4 B	4	M3Ks-HD	3128	2998	2898	2606	2318
ECO47LV 2S4 B	4	M3Ks-HD	3334	3194	3088	2778	2470
ECO47LV 2M4 B	4	M3Ks-HD	3590	3440	3325	3000	2660
ECO47LV 1L4 B	4	M3Ks-HD	4236	4060	3924	3530	3138

2 OF 2

"All machines have 300% short circuit capability.

On ECP3-ECO46 range the voltage regulator is feeded by auxiliary winding.

On ECO47 the voltage regulator is feeded by PMG.

Indicated rating refences to series or parallel star connection as published table.

On ECO40, ECO43, ECO46 and ECO47 the standard connection is parallel star. For any different configuration please consult Meccalte representative".

4 Pole | 440V

50 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 127 / 220 / 254 / 440 Volts
Winding: Standard
RPM: 1500
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP3 1S4 C	12	M2K	5,9	5,6	5,5	5	4,4
ECP3 2S4 C	12	M2K	7,4	7	6,8	6,4	5,4
ECP3 1L4 C	12	M2K	9,6	9,4	9	8	7,2
ECP3 2L4 C	12	M2K	11,8	11,4	11	10	8,8
ECP3 3L4 C	12	M2K	12,8	12,4	12	10,5	9,6
ECP4 1M4 C	12	M2K	6	5,6	5,5	5	4,4
ECP4 2M4 C	12	M2K	7,4	7	6,8	6,4	5,4
ECP4 3M4 C	12	M2K	10	9,3	9	8,4	7,2
ECP4 4M4 C	12	M2K	12,8	11,9	11,5	10,7	9,2
ECP4 5M4 C	12	M2K	15,4	14,4	14	13,2	11,2
ECP4 1L4 C	12	M2K	18,3	17	16,5	15,3	13,2
ECP4 2L4 C	12	M2K	20,4	19	18,5	17,5	14,8
ECP28 1VS4 C	12	M2K	-	-	-	-	-
ECP28 2VS4 C	12	M2K	-	-	-	-	-
ECP28 1S4 C	12	M2K	-	-	-	-	-
ECP28 2S4 C	12	M2K	-	-	-	-	-
ECP28 3S4 C	12	M2K	17,5	16,5	16	14,9	12,8
ECP28 M4 C	12	M2K	20,4	19	18,5	17,5	14,8
ECP28 L4 C	12	M2K	-	-	-	-	-
ECP28 VL4 C	12	M2K	-	-	-	-	-
ECP30 1M4 C	12	M2K	20,4	19	18,5	17,5	15
ECP30 2M4 C	12	M2K	25,2	23,7	23	21,4	18,4
ECP30 3M4 C	12	M2K	29,5	27,8	27	25,1	21,6
ECP30 1L4 C	12	M2K	34,4	32,4	31,5	29,3	25,2
ECP30 2L4 C	12	M2K	39	37	36	33,5	28,8
ECP30 3L4 C	12	M2K	42,1	40	39,4	34,1	31,5
ECP32 1S4 C	12	M2K	33	31,6	30	28	24
ECP32 2S4 C	12	M2K	37,5	36	34	33	27
ECP32 1M4 C	12	M2K	44	42	40	38	32
ECP32 2M4 C	12	M2K	52	49,5	47,5	42,6	38
ECP32 1L4 C	12	M2K	77	73	70	62	56
ECP32 2L4 C	12	M2K	85	79	77	68	62
ECP34 1S4 C	12	M2K	79	77	72	65	58
ECP34 2S4 C	12	M2K	88	86	80	72	64
ECP34 1M4 C	12	M2K	117	112	106	96	85
ECP34 2M4 C	12	M2K	125	120	114	103	91
ECP34 1L4 C	12	M2K	137	131	125	113	100
ECP34 2L4 C	12	M2K	170	163	155	139	124
ECO38 1S4 C	12	M2K	180	173	165	155	132
ECO38 2S4 C	12	M2K	209	200	190	175	152
ECO38 1M4 C	12	M2K	234	221	210	190	168
ECO38 2M4 C	12	M2K	253	243	230	215	184
ECO38 1L4 C	12	M2K	319	305	290	265	232
ECO38 2L4 C	12	M2K	360	350	340	310	272
ECO38 VL4 C	12	M2K	370	360	350	319	280

127 Δ Δ / 220 Δ Δ / 254 Δ Δ / 440 Δ Δ Volts

MECC ALTE INDUSTRIAL

4 Pole | 440V

50 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 255 / 440 / 509 / 880 Volts
Winding: Standard
RPM: 1500
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
EC040 1S4 C	12	M3K	404	386	370	342	296
EC040 2S4 C	12	M3K	393	375	360	330	288
EC040 3S4 C	12	M3K	503	479	460	414	368
EC040 1L4 C	12	M3K	546	515	500	454	400
EC040 2L4 C	12	M3K	616	588	570	515	456
EC040 3L4 C	12	M3K	560	535	520	483	416
EC040 VL4 C	12	M3K	740	700	680	630	544
EC043 1S4 A	12	M3K	825	800	760	690	615
EC043 2S4 A	12	M3K	907	870	830	770	664
EC043 1M4 A	12	M3K	1093	1044	1000	910	800
EC043 2M4 A	12	M3K	983	940	900	820	720
EC043 2L4 A	12	M3K	1349	1290	1235	1140	988
EC043 VL4 A	12	M3K	-	-	-	-	-
EC046 1S4 A	12	M3K	1400	1340	1300	1170	1040
EC046 1.5S4 A	12	M3K	1620	1545	1500	1360	1200
EC046 2S4 A	12	M3K	1720	1650	1600	1440	1280
EC046 1L4 A	12	M3K	1990	1900	1850	1660	1480
EC046 1.5L4 A	12	M3K	2375	2275	2200	1950	1760
EC046 2L4 A	12	M3K	2450	2350	2280	2050	1824
EC046 VL4 A	12	M3K	2150	2060	2000	1780	1600
EC047LV 1S4 B	4	M3Ks-HD	2994	2868	2773	2494	2218
EC047LV 2S4 B	4	M3Ks-HD	3190	3056	2955	2658	2362
EC047LV 2M4 B	4	M3Ks-HD	3436	3292	3182	2862	2544
EC047LV 1L4 B	4	M3Ks-HD	4054	3884	3755	3378	3002

254 Δ Δ / 440 Δ Δ / 508 Δ Δ / 880 Δ Δ Volts

MECCALTE INDUSTRIAL

2 OF 2

"All machines have 300% short circuit capability.

On ECP3-ECO46 range the voltage regulator is feeded by auxiliary winding.

On ECO47 the voltage regulator is feeded by PMG.

Indicated rating references to series or parallel star connection as published table.

On ECO40, ECO43, ECO46 and ECO47 the standard connection is parallel star. For any different configuration please consult Meccalte representative".

Warning: Using a standard winding of a prescribed voltage and then adjusting to a different voltage, can lead to performances different to those published for the rated voltage of that winding. This may be in regard to power, efficiency, reactance, transient responses and overload ability. It is therefore recommended to visit the <http://support.meccalte.com> website and the DDS area specifically to produce a custom datasheet for the voltage requested. In this way you are assured of the correct performances.

4 Pole | 220V - 230V - 240V

50 Hz | 1 Phase | 1 PF | AVR Controlled

Winding: Standard - Reconnected
RPM: 1500
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP3 1S4 C	12	M2K	5	4,8	4,6	4,3	3,7
ECP3 2S4 C	12	M2K	6,4	6	5,8	5,7	4,6
ECP3 1L4 C	12	M2K	8,5	8,2	8	7,3	6,4
ECP3 2L4 C	12	M2K	10	9,8	9,6	8,9	7,7
ECP3 3L4 C	12	M2K	10,7	10,3	10	9,1	8
ECP4 1M4 C	12	M2K	5	4,8	4,6	4,3	3,7
ECP4 2M4 C	12	M2K	5,7	5,5	5,3	4,9	4,2
ECP4 3M4 C	12	M2K	6,5	6,2	6	5,6	4,8
ECP4 4M4 C	12	M2K	8,2	7,7	7,5	7	6
ECP4 5M4 C	12	M2K	9,8	9,2	9	8,4	7,2
ECP4 1L4 C	12	M2K	12	11,3	11	10,2	8,8
ECP4 2L4 C	12	M2K	14,2	13,5	13	11,8	10,4
ECP28 1VS4 C	12	M2K	4,9	4,6	4,5	4,1	3,6
ECP28 2VS4 C	12	M2K	7,1	6,7	6,5	6	5,2
ECP28 1S4 C	12	M2K	8,7	8,2	8	7,3	6,4
ECP28 2S4 C	12	M2K	10,9	10,3	10	9,3	8
ECP28 3S4 C	12	M2K	12,5	11,8	11,5	10,7	9,2
ECP28 M4 C	12	M2K	14,7	14	13,5	12,3	10,8
ECP28 L4 C	12	M2K	18	16,7	16,5	15,1	13,2
ECP28 VL4 C	12	M2K	22,3	21	20,5	18,3	16,4
ECP30 1M4 C	12	M2K	14,7	14	13,5	12,3	10,8
ECP30 2M4 C	12	M2K	18	16,7	16,5	15,1	13,2
ECP30 3M4 C	12	M2K	22,3	21	20,5	18,3	16,4
ECP30 1L4 C	12	M2K	24	22,5	22	19,6	17,6
ECP30 2L4 C	12	M2K	26	24,6	24	21,4	19,2
ECP30 3L4 C	12	M2K	28,3	26,6	26	23,2	20,8
ECP32 1S4 C	12	M2K	25	24	23	22	18,4
ECP32 2S4 C	12	M2K	28	27	26	25	21
ECP32 1M4 C	12	M2K	31,6	31	29	28	23
ECP32 2M4 C	12	M2K	38	37	35	32,2	28
ECP32 1L4 C	12	M2K	47	44	43	40	34,4
ECP32 2L4 C	12	M2K	49	46	45	42	36

SERIES DELTA / ZIG-ZAG / 1PHASE DOUBLE DELTA

MECC ALTE INDUSTRIAL

10F2

4 Pole | 220V - 230V - 240V

50 Hz | 1 Phase | 1 PF | AVR Controlled

Winding: Standard - Reconnected
RPM: 1500
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP34 1S4 C	12	M2K	64	60	59	55	47
ECP34 2S4 C	12	M2K	68	64	62	56	50
ECP34 1M4 C	12	M2K	76	72	70	64	56
ECP34 2M4 C	12	M2K	81	76	74	68	59
ECP34 1L4 C	12	M2K	90	85	83	74	66
ECP34 2L4 C	12	M2K	99	93	90,5	81	72
EC038 1S4 C	12	M2K	95	89	87	78	70
EC038 2S4 C	12	M2K	100	90	88	81	71
EC038 1M4 C	12	M2K	125	115	111	100	88
EC038 2M4 C	12	M2K	135	125	122	109	97
EC038 1L4 C	12	M2K	150	140	136	123	108
EC038 2L4 C	12	M2K	170	160	156	140	125
EC038 VL4 C	12	M2K	174	164	160	144	128
EC040 1S4 C	12	M3K	211	207	196	180	156
EC040 2S4 C	12	M3K	237	232	220	204	176
EC040 3S4 C	12	M3K	302	285	276	246	221
EC040 1L4 C	12	M3K	315	307	292	266	233
EC040 2L4 C	12	M3K	335	320	310	280	248
EC040 3L4 C	12	M3K	360	345	335	310	268
EC040 VL4 C	12	M3K	470	450	435	366	348

SERIES DELTA / ZIG-ZAG / 1PH DOUBLE DELTA

PARALLEL DELTA

MECCALTE INDUSTRIAL

2 OF 2

All machines have an auxiliary winding 'standard' with 300% short circuit capability.

The weights are the same as the 'standard' 3 Phase Models

Ratings with damper cage.

Consult Factory to choose for your applications.

4 Pole | 220V - 230V - 240V

50 Hz | 1 Phase | 0.8 PF | AVR Controlled

Winding: Standard - Reconnected
RPM: 1500
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP3 1S4 C	12	M2K	4,6	4,4	4,2	3,9	3,4
ECP3 2S4 C	12	M2K	5,8	5,5	5,3	5,2	4,2
ECP3 1L4 C	12	M2K	7,5	7,1	6,9	6,3	5,5
ECP3 2L4 C	12	M2K	9,4	8,8	8,6	8	6,9
ECP3 3L4 C	12	M2K	9,8	9,3	9	8,2	7,2
ECP4 1M4 C	12	M2K	4,6	4,4	4,2	3,9	3,4
ECP4 2M4 C	12	M2K	5,2	5	4,8	4,4	3,8
ECP4 3M4 C	12	M2K	6	5,7	5,5	5,1	4,4
ECP4 4M4 C	12	M2K	7,3	6,9	6,7	6,3	5,4
ECP4 5M4 C	12	M2K	8,7	8,2	8	7,5	6,4
ECP4 1L4 C	12	M2K	10,8	10,2	9,9	9,2	7,9
ECP4 2L4 C	12	M2K	12,8	12,2	11,7	10,6	9,4
ECP28 1VS4 C	12	M2K	4,5	4,2	4,1	3,7	3,3
ECP28 2VS4 C	12	M2K	6,4	6,1	5,9	5,4	4,7
ECP28 1S4 C	12	M2K	7,8	7,4	7,2	6,6	5,8
ECP28 2S4 C	12	M2K	9,8	9,3	9	8,4	7,2
ECP28 3S4 C	12	M2K	11,3	10,7	10,4	9,7	8,3
ECP28 M4 C	12	M2K	13,3	12,7	12,2	11,1	9,8
ECP28 L4 C	12	M2K	16,2	15,1	14,9	13,6	11,9
ECP28 VL4 C	12	M2K	20,2	19	18,5	16,5	14,8
ECP30 1M4 C	12	M2K	13,3	12,7	12,2	11,1	9,8
ECP30 2M4 C	12	M2K	16,2	15,1	14,9	13,6	11,9
ECP30 3M4 C	12	M2K	20,2	19	18,5	16,5	14,8
ECP30 1L4 C	12	M2K	21,6	20,3	19,8	17,6	15,8
ECP30 2L4 C	12	M2K	23,4	22	21,5	19,2	17,2
ECP30 3L4 C	12	M2K	25,5	23,9	23,4	20,9	18,7
ECP32 1S4 C	12	M2K	21,8	20,9	20	19,1	16
ECP32 2S4 C	12	M2K	25,5	24,3	23,4	22,5	18,7
ECP32 1M4 C	12	M2K	28,3	27,8	26	25,1	20,8
ECP32 2M4 C	12	M2K	33,8	32,8	31	28,5	24,8
ECP32 1L4 C	12	M2K	42,5	39,9	39	36,3	31,2
ECP32 2L4 C	12	M2K	43,6	40,9	40	37,3	32

MECC ALTE INDUSTRIAL

SERIES DELTA / ZIG-ZAG / 1PHASE DOUBLE DELTA

10F2

4 Pole | 220V - 230V - 240V

50 Hz | 1 Phase | 0.8 PF | AVR Controlled

Winding: Standard - Reconnected
RPM: 1500
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP34 1S4 C	12	M2K	58	54	53	49	42
ECP34 2S4 C	12	M2K	61	58	56	51	45
ECP34 1M4 C	12	M2K	69	65	63	58	50
ECP34 2M4 C	12	M2K	73	69	67	62	54
ECP34 1L4 C	12	M2K	82	77	75	67	60
ECP34 2L4 C	12	M2K	88	83	81	72	65
ECO38 1S4 C	12	M2K	85	80	78	70	62
ECO38 2S4 C	12	M2K	88	83	81	75	65
ECO38 1M4 C	12	M2K	110	105	101	91	81
ECO38 2M4 C	12	M2K	119	112	109	97	87
ECO38 1L4 C	12	M2K	131	124	120	109	96
ECO38 2L4 C	12	M2K	148	139	136	122	109
ECO38 VL4 C	12	M2K	153	144	140	126	112
ECO40 1S4 C	12	M3K	199	193	183	168	146
ECO40 2S4 C	12	M3K	232	225	213	198	170
ECO40 3S4 C	12	M3K	287	272	263	234	210
ECO40 1L4 C	12	M3K	300	289	275	251	220
ECO40 2L4 C	12	M3K	316	299	290	262	232
ECO40 3L4 C	12	M3K	339	320	311	288	249
ECO40 VL4 C	12	M3K	412	391	378	318	302

SERIES DELTA / ZIG-ZAG / 1PH DOUBLE DELTA

PARALLEL DELTA

MECC ALTE INDUSTRIAL

2 OF 2

All machines have an auxiliary winding 'standard' with 300% short circuit capability.

The weights are the same as the 'standard' 3 Phase Models

Ratings with damper cage.

Consult Factory to choose for your applications.

4 Pole | 230V

50 Hz | 1 Phase | 1 PF | AVR Controlled

Winding: Dedicated
RPM: 1500
Insulation: Class H



MECC ALTE INDUSTRIAL

MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP3 1S4 C	4	M2K	5,4	5,1	5	4,6	4
ECP3 2S4 C	4	M2K	6,6	6,2	6	5,6	4,8
ECP3 1L4 C	4	M2K	9,1	8,8	8,5	7,7	6,8
ECP3 2L4 C	4	M2K	10,7	10,3	10	9,3	8
ECP3 3L4 C	4	M2K	11,7	11,3	11	9,8	8,8
ECP4 1M4 C	4	M2K	5,5	5,1	5	4,5	4
ECP4 2M4 C	4	M2K	6,5	6,2	6	5,5	4,8
ECP4 3M4 C	4	M2K	7,6	7,2	7	6,4	5,6
ECP4 4M4 C	4	M2K	9,3	8,7	8,5	7,7	6,8
ECP4 5M4 C	4	M2K	11,4	10,8	10,5	9,8	8,4
ECP4 1L4 C	4	M2K	13,6	12,8	12,5	11,7	10
ECP4 2L4 C	4	M2K	15,8	14,8	14,5	13,2	11,6
ECP28 1VS4 C	4	M2K	5,5	5,1	5	4,5	4
ECP28 2VS4 C	4	M2K	7,6	7,2	7	6,4	5,6
ECP28 1S4 C	4	M2K	9,3	8,7	8,5	7,7	6,8
ECP28 2S4 C	4	M2K	11,4	10,8	10,5	9,8	8,4
ECP28 3S4 C	4	M2K	13,6	12,8	12,5	11,7	10
ECP28 M4 C	4	M2K	15,8	14,8	14,5	13,2	11,6
ECP28 L4 C	4	M2K	19,6	18,3	18	16,3	14,4
ECP28 VL4 C	4	M2K	22	22,6	22	20	17,6
ECP30 1M4 C	4	M2K	15,8	14,8	14,5	13,2	11,6
ECP30 2M4 C	4	M2K	19,6	18,3	18	16,3	14,4
ECP30 3M4 C	4	M2K	24	22,6	22	20	17,6
ECP30 1L4 C	4	M2K	28	26,4	25,5	24	20
ECP30 2L4 C	4	M2K	31,7	30	29	26,6	23,6
ECP30 3L4 C	4	M2K	33,3	31,6	30,5	28,0	24,8
ECP32 1S4 C	4	M2K	31	29	28	26,5	22
ECP32 2S4 C	4	M2K	35	33	32	29,4	26
ECP32 1M4 C	4	M2K	39	37	36	34,5	29
ECP32 2M4 C	4	M2K	44	41	40	38	32
ECP32 1L4 C	4	M2K	50	47	46	41	37
ECP32 2L4 C	4	M2K	52	49	48	45	38
ECP34 1S4 C	4	M2K	71	67	65	61	52
ECP34 2S4 C	4	M2K	76	73	70	64	56
ECP34 1M4 C	4	M2K	85	81	78	71	62
ECP34 2M4 C	4	M2K	87	83	80	73	64
ECP34 1L4 C	4	M2K	90	85	83	76	66
ECP34 2L4 C	4	M2K	100	94	91,5	84	73

All machines have an auxiliary winding 'standard' with 300% short circuit capability.

Consult Factory to choose for your application.

Ratings with damper cage (Except Series 3).

For different nominal voltages please consult Factory.

4 Pole | 230V

50 Hz | 1 Phase | 0.8 PF | AVR Controlled

Winding: Dedicated
RPM: 1500
Insulation: Class H



MECC ALTE INDUSTRIAL

MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP3 1S4 C	4	M2K	5	4,6	4,5	4,2	3,6
ECP3 2S4 C	4	M2K	6	5,6	5,4	5	4,3
ECP3 1L4 C	4	M2K	8	7,7	7,5	6,9	6
ECP3 2L4 C	4	M2K	9,7	9,3	9	8,4	7,2
ECP3 3L4 C	4	M2K	10,7	10,3	10	9,2	8
ECP4 1M4 C	4	M2K	5	4,6	4,5	4	3,6
ECP4 2M4 C	4	M2K	6	5,6	5,4	5	4,3
ECP4 3M4 C	4	M2K	6,5	6,2	6	5,5	4,8
ECP4 4M4 C	4	M2K	8,4	7,9	7,7	7	6,2
ECP4 5M4 C	4	M2K	10,4	9,8	9,5	9	7,6
ECP4 1L4 C	4	M2K	12,3	11,6	11,3	10,6	9
ECP4 2L4 C	4	M2K	14,2	13,3	13	12	10,4
ECP28 1VS4 C	4	M2K	4,9	4,6	4,5	4	3,6
ECP28 2VS4 C	4	M2K	6,5	6,2	6	5,5	4,8
ECP28 1S4 C	4	M2K	8,4	7,9	7,7	7	6,2
ECP28 2S4 C	4	M2K	10,4	9,8	9,5	9	7,6
ECP28 3S4 C	4	M2K	12,3	11,6	11,3	10,6	9
ECP28 M4 C	4	M2K	14,2	13,3	13	12	10,4
ECP28 L4 C	4	M2K	17,7	16,4	16,2	14,8	13
ECP28 VL4 C	4	M2K	21,8	20,5	20	18	16
ECP30 1M4 C	4	M2K	14,2	13,3	13	12	10,4
ECP30 2M4 C	4	M2K	17,7	16,4	16,2	14,8	13
ECP30 3M4 C	4	M2K	21,8	20,5	20	18	16
ECP30 1L4 C	4	M2K	23	22	21	19	16,8
ECP30 2L4 C	4	M2K	25,6	24,4	23,5	21,7	18,8
ECP30 3L4 C	4	M2K	26,9	25,7	24,7	22,8	19,8
ECP32 1S4 C	4	M2K	24	23	22	20	18
ECP32 2S4 C	4	M2K	28,3	27	26	24	21
ECP32 1M4 C	4	M2K	32,7	30,4	30	28	24
ECP32 2M4 C	4	M2K	37,1	35	34	30	27
ECP32 1L4 C	4	M2K	45,8	43	42	39	34
ECP32 2L4 C	4	M2K	48	45	44	41	35
ECP34 1S4 C	4	M2K	63	60	58	53	46
ECP34 2S4 C	4	M2K	73	69	67	61	54
ECP34 1M4 C	4	M2K	76	72	70	64	56
ECP34 2M4 C	4	M2K	78	74	72	66	58
ECP34 1L4 C	4	M2K	82	77	75	69	60
ECP34 2L4 C	4	M2K	93	87	85	78	68

All machines have an auxiliary winding 'standard' with 300% short circuit capability.

Consult Factory to choose for your application.

Ratings with damper cage (Except Series 3).

For different nominal voltages please consult Factory.

4 Pole | 480V

60 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 139 / 240 / 277 / 480 Volts
Winding: Standard
RPM: 1800
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP3 1S4 C	12	M2K	8,4	8	7,8	7,2	6,2
ECP3 2S4 C	12	M2K	10,5	10	9,6	9	7,7
ECP3 1L4 C	12	M2K	14,3	13,8	13,2	12	10,6
ECP3 2L4 C	12	M2K	17,5	16,9	16,2	15	13
ECP3 3L4 C	12	M2K	19,3	18,8	18	16,5	14,4
ECP4 1M4 C	12	M2K	8,5	8	7,8	7,2	6,2
ECP4 2M4 C	12	M2K	10,5	10	9,6	9	7,7
ECP4 3M4 C	12	M2K	13,2	12,4	12	10,9	9,6
ECP4 4M4 C	12	M2K	16,5	15,5	15	13,9	12
ECP4 5M4 C	12	M2K	19,8	18,5	18	16,8	14,4
ECP4 1L4 C	12	M2K	24	22,2	22	20,2	17,6
ECP4 2L4 C	12	M2K	26,4	24,6	24	22	19,2
ECP28 1VS4 C	12	M2K	9,9	9,3	9	8,2	7,2
ECP28 2VS4 C	12	M2K	13,2	12,4	12	10,9	9,6
ECP28 1S4 C	12	M2K	16,5	15,5	15	13,9	12
ECP28 2S4 C	12	M2K	19,8	18,5	18	16,8	14,4
ECP28 3S4 C	12	M2K	23	21,6	21	19,6	16,8
ECP28 M4 C	12	M2K	26,4	24,6	24	22	19,2
ECP28 L4 C	12	M2K	33	30,6	30	27,5	24
ECP28 VL4 C	12	M2K	39,6	36,6	36	32	29
ECP30 1M4 C	12	M2K	26,4	24,6	24	22	19,2
ECP30 2M4 C	12	M2K	33	30,6	30	27,5	24
ECP30 3M4 C	12	M2K	39,6	36,6	36	32	28,8
ECP30 1L4 C	12	M2K	46,2	42,7	42	37,3	33,6
ECP30 2L4 C	12	M2K	52,8	48,8	48	42,7	38,4
ECP30 3L4 C	12	M2K	56,2	53,4	52,5	45,5	42
ECP32 1S4 C	12	M2K	49,5	47	45	43	36
ECP32 2S4 C	12	M2K	59	57	54	52	43,2
ECP32 1M4 C	12	M2K	66	63	60	58	48
ECP32 2M4 C	12	M2K	82,5	77,5	75	71,5	60
ECP32 1L4 C	12	M2K	99	93,7	90	83	72
ECP32 2L4 C	12	M2K	110	102	100	92	80
ECP34 1S4 C	12	M2K	115	111	105	95	84
ECP34 2S4 C	12	M2K	132	126	120	109	96
ECP34 1M4 C	12	M2K	165	159	150	135	120
ECP34 2M4 C	12	M2K	178	172	162	146	130
ECP34 1L4 C	12	M2K	198	189	180	163	144
ECP34 2L4 C	12	M2K	218	208	198	178	158
ECO38 1S4 C	12	M2K	236	230	220	205	176
ECO38 2S4 C	12	M2K	264	253	240	220	192
ECO38 1M4 C	12	M2K	300	284	270	250	216
ECO38 2M4 C	12	M2K	330	316	300	280	240
ECO38 1L4 C	12	M2K	396	378	360	330	288
ECO38 2L4 C	12	M2K	444	438	420	385	336
ECO38 VL4 C	12	M2K	465	453	440	403	352

138 Δ Δ / 240 Δ Δ / 277 Δ / 480 Δ Volts

MECC ALTE INDUSTRIAL

4 Pole | 480V

60 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 278 / 480 / 555 / 960 Volts
Winding: Standard
RPM: 1800
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
EC040 1S4 C	12	M3K	525	500	480	440	384
EC040 2S4 C	12	M3K	590	563	540	490	432
EC040 3S4 C	12	M3K	660	625	600	540	480
EC040 1L4 C	12	M3K	722	680	660	600	528
EC040 2L4 C	12	M3K	810	775	750	677	600
EC040 3L4 C	12	M3K	882	840	816	756	653
EC040 VL4 C	12	M3K	970	925	900	830	720
EC043 1S4 A	12	M3K	1080	1030	985	900	790
EC043 2S4 A	12	M3K	1220	1170	1116	1020	893
EC043 1M4 A	12	M3K	1365	1300	1250	1140	1000
EC043 2M4 A	12	M3K	1525	1450	1400	1300	1120
EC043 2L4 A	12	M3K	1700	1630	1560	1440	1248
EC043 VL4 A	12	M3K	1824	1765	1700	1540	1360
EC046 1S4 A	12	M3K	1944	1875	1800	1620	1440
EC046 1.5S4 A	12	M3K	2140	2040	1980	1780	1584
EC046 2S4 A	12	M3K	2332	2236	2160	1920	1728
EC046 1L4 A	12	M3K	2722	2608	2520	2280	2016
EC046 1.5L4 A	12	M3K	2980	2860	2760	2460	2208
EC046 2L4 A	12	M3K	3240	3105	3000	2700	2400
EC046 VL4 A	12	M3K	3683	3529	3410	3050	2728
EC047LV 1S4 B	4	M3Ks-HD	3960	3794	3667	3300	2932
EC047LV 2S4 B	4	M3Ks-HD	4212	4034	3900	3508	3120
EC047LV 2M4 B	4	M3Ks-HD	4536	4346	4200	3780	3360
EC047LV 1L4 B	4	M3Ks-HD	5352	5128	4956	4458	3964

277 Δ Δ / 480 Δ Δ / 554 Δ Δ / 960 Δ Δ Volts

MECC ALTE INDUSTRIAL

2 OF 2

"All machines have 300% short circuit capability.

On ECP3-ECO46 range the voltage regulator is feeded by auxiliary winding.

On ECO47 the voltage regulator is feeded by PMG.

Indicated rating refences to series or parallel star connection as published table.

On ECO40, ECO43, ECO46 and ECO47 the standard connection is parallel star. For any different configuration please consult Meccalte representative".

4 Pole | 460V

60 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 133 / 230 / 266 / 460 Volts
Winding: Standard
RPM: 1800
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP3 1S4 C	12	M2K	8	6,8	6,5	6	5,2
ECP3 2S4 C	12	M2K	8,8	8,3	8	7,5	6,4
ECP3 1L4 C	12	M2K	11,8	11,4	11	10	8,8
ECP3 2L4 C	12	M2K	14,5	14	13,5	12,5	10,8
ECP3 3L4 C	12	M2K	16	15,5	15	14	12
ECP4 1M4 C	12	M2K	7,1	6,8	6,5	6	5,2
ECP4 2M4 C	12	M2K	8,8	8,3	8	7,5	6,4
ECP4 3M4 C	12	M2K	11	10,3	10	9,1	8
ECP4 4M4 C	12	M2K	13,7	13	12,5	11,6	10
ECP4 5M4 C	12	M2K	16,5	15,4	15	14,1	12
ECP4 1L4 C	12	M2K	20	18,5	18	17	14,4
ECP4 2L4 C	12	M2K	22	20,5	20	18,5	16
ECP28 1VS4 C	12	M2K	8,2	7,7	7,5	6,7	6
ECP28 2VS4 C	12	M2K	11	10,3	10	9,1	8
ECP28 1S4 C	12	M2K	13,7	13	12,5	11,6	10
ECP28 2S4 C	12	M2K	16,5	15,4	15	14,1	12
ECP28 3S4 C	12	M2K	19,2	18	17,5	16,5	14
ECP28 M4 C	12	M2K	22	20,5	20	18,5	16
ECP28 L4 C	12	M2K	27,5	25,5	25	23	20
ECP28 VL4 C	12	M2K	33	30,5	30	26	24
ECP30 1M4 C	12	M2K	22	20,5	20	18,5	16
ECP30 2M4 C	12	M2K	27,5	25,5	25	23	20
ECP30 3M4 C	12	M2K	33	30,5	30	26	24
ECP30 1L4 C	12	M2K	38,5	35,6	35	30,3	28
ECP30 2L4 C	12	M2K	44	40,7	40	34,7	32
ECP30 3L4 C	12	M2K	47	44,5	44	37,9	35
ECP32 1S4 C	12	M2K	41	39	37,5	35	30
ECP32 2S4 C	12	M2K	50	48,7	45	41	36
ECP32 1M4 C	12	M2K	55	52,5	50	48	40
ECP32 2M4 C	12	M2K	68,8	65	62,5	59,5	50
ECP32 1L4 C	12	M2K	82,5	78	75	67	60
ECP32 2L4 C	12	M2K	91	85	82,5	73,2	66
ECP34 1S4 C	12	M2K	96	93	87,5	79	70
ECP34 2S4 C	12	M2K	110	105	100	90	80
ECP34 1M4 C	12	M2K	137	132	125	112	100
ECP34 2M4 C	12	M2K	148	143	135	121	108
ECP34 1L4 C	12	M2K	165	158	150	136	120
ECP34 2L4 C	12	M2K	176	169	160	144	128
ECO38 1S4 C	12	M2K	196	188	180	170	144
ECO38 2S4 C	12	M2K	220	211	200	185	160
ECO38 1M4 C	12	M2K	250	237	225	207	180
ECO38 2M4 C	12	M2K	275	264	250	230	200
ECO38 1L4 C	12	M2K	330	315	300	275	240
ECO38 2L4 C	12	M2K	370	360	350	320	280
ECO38 VL4 C	12	M2K	380	370	360	329	288

133 Δ Δ / 230 Δ Δ / 266 Δ / 460 Δ Volts

MECC ALTE INDUSTRIAL

4 Pole | 460V

60 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 266 / 460 / 532 / 920 Volts
Winding: Standard
RPM: 1800
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
EC040 1S4 C	12	M3K	440	417	400	370	320
EC040 2S4 C	12	M3K	491	468	450	410	360
EC040 3S4 C	12	M3K	550	521	500	450	400
EC040 1L4 C	12	M3K	601	567	550	500	440
EC040 2L4 C	12	M3K	675	645	625	564	500
EC040 3L4 C	12	M3K	735	700	680	630	544
EC040 VL4 C	12	M3K	825	777	750	690	600
EC043 1S4 A	12	M3K	900	860	820	750	655
EC043 2S4 A	12	M3K	1016	975	930	850	744
EC043 1M4 A	12	M3K	1125	1070	1025	950	820
EC043 2M4 A	12	M3K	1250	1200	1150	1050	920
EC043 2L4 A	12	M3K	1420	1358	1300	1200	1040
EC043 VL4 A	12	M3K	1540	1500	1400	1280	1120
EC046 1S4 A	12	M3K	1650	1552	1500	1350	1200
EC046 1.5S4 A	12	M3K	1800	1700	1650	1480	1320
EC046 2S4 A	12	M3K	1944	1863	1800	1600	1440
EC046 1L4 A	12	M3K	2268	2173	2100	1900	1680
EC046 1.5L4 A	12	M3K	2500	2380	2300	2050	1840
EC046 2L4 A	12	M3K	2700	2588	2500	2250	2000
EC046 VL4 A	12	M3K	3024	2899	2800	2500	2240
EC047LV 1S4 B	4	M3Ks-HD	3300	3162	3056	2750	2444
EC047LV 2S4 B	4	M3Ks-HD	3510	3362	3250	2924	2600
EC047LV 2M4 B	4	M3Ks-HD	3780	3622	3500	3150	2800
EC047LV 1L4 B	4	M3Ks-HD	4460	4274	4130	3716	3304

266 Δ Δ / 460 Δ Δ / 530 Δ Δ / 920 Δ Δ Volts

MECC ALTE INDUSTRIAL

2 OF 2

"All machines have 300% short circuit capability.

On ECP3-ECO46 range the voltage regulator is feeded by auxiliary winding.

On ECO47 the voltage regulator is feeded by PMG.

Indicated rating refences to series or parallel star connection as published table.

On ECO40, ECO43, ECO46 and ECO47 the standard connection is parallel star. For any different configuration please consult Meccalte representative".

4 Pole | 440V

60 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 127 / 220 / 254 / 440 Volts
Winding: Standard
RPM: 1800
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP3 1S4 C	12	M2K	8,4	8	7,8	7,2	6,2
ECP3 2S4 C	12	M2K	10,5	10	9,6	9	7,7
ECP3 1L4 C	12	M2K	14,3	13,8	13,2	12	10,6
ECP3 2L4 C	12	M2K	17,5	16,9	16,2	15	13
ECP3 3L4 C	12	M2K	19,3	18,8	18	16,5	14,4
ECP4 1M4 C	12	M2K	8,5	8	7,8	7,2	6,2
ECP4 2M4 C	12	M2K	10,5	10	9,6	9	7,7
ECP4 3M4 C	12	M2K	12,4	11,6	11,3	10	9
ECP4 4M4 C	12	M2K	15,3	14,3	13,9	12,5	11,1
ECP4 5M4 C	12	M2K	18,1	16,8	16,4	15,4	13,1
ECP4 1L4 C	12	M2K	21,7	20	19,5	19	15,6
ECP4 2L4 C	12	M2K	25,3	24	23	20	18,4
ECP28 1VS4 C	12	M2K	9,3	8,7	8,5	7,5	6,8
ECP28 2VS4 C	12	M2K	12,4	11,6	11,3	10	9
ECP28 1S4 C	12	M2K	15,3	14,3	13,9	12,5	11,1
ECP28 2S4 C	12	M2K	18,1	16,8	16,4	15,4	13,1
ECP28 3S4 C	12	M2K	21,1	19,7	19	18	15,3
ECP28 M4 C	12	M2K	25,3	23,6	23	20	18,4
ECP28 L4 C	12	M2K	30,3	28	27,5	25,5	22
ECP28 VL4 C	12	M2K	39,6	36,6	36	32	29
ECP30 1M4 C	12	M2K	25,3	23,6	23	20	18,4
ECP30 2M4 C	12	M2K	30,3	28	27,5	26	22
ECP30 3M4 C	12	M2K	39,6	37	36	32	28,8
ECP30 1L4 C	12	M2K	46,2	43	42	37	33,6
ECP30 2L4 C	12	M2K	52,8	49	48	43	38,4
ECP30 3L4 C	12	M2K	56,2	53,4	52,5	45,5	42
ECP32 1S4 C	12	M2K	47	45	43	41	34,4
ECP32 2S4 C	12	M2K	55	53	50	48	40
ECP32 1M4 C	12	M2K	66	63	60	58	48
ECP32 2M4 C	12	M2K	80	74	72,5	70	58
ECP32 1L4 C	12	M2K	90	86	82	80	65,6
ECP32 2L4 C	12	M2K	106	98	96	89	76,8
ECP34 1S4 C	12	M2K	115	111	105	95	84
ECP34 2S4 C	12	M2K	132	126	120	109	96
ECP34 1M4 C	12	M2K	154	147	140	125	112
ECP34 2M4 C	12	M2K	165	159	150	135	120
ECP34 1L4 C	12	M2K	187	178	170	150	136
ECP34 2L4 C	12	M2K	210	201	191	165	153
ECO38 1S4 C	12	M2K	236	230	220	205	176
ECO38 2S4 C	12	M2K	264	253	240	220	192
ECO38 1M4 C	12	M2K	300	284	270	250	216
ECO38 2M4 C	12	M2K	330	316	300	280	240
ECO38 1L4 C	12	M2K	374	357	340	310	272
ECO38 2L4 C	12	M2K	444	438	420	385	336
ECO38 VL4 C	12	M2K	455	442	430	394	344

127 Δ Δ / 220 Δ Δ / 254 Δ Δ / 440 Δ Δ Volts

MECC ALTE INDUSTRIAL

4 Pole | 440V

60 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 255 / 440 / 509 / 880 Volts
Winding: Standard
RPM: 1800
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
EC040 1S4 C	12	M3K	492	469	450	410	360
EC040 2S4 C	12	M3K	557	532	510	460	408
EC040 3S4 C	12	M3K	634	604	580	520	464
EC040 1L4 C	12	M3K	669	649	630	570	504
EC040 2L4 C	12	M3K	762	730	705	636	564
EC040 3L4 C	12	M3K	843	803	780	720	624
EC040 VL4 C	12	M3K	970	925	900	830	720
EC043 1S4 A	12	M3K	1080	1030	985	900	790
EC043 2S4 A	12	M3K	1159	1111	1060	969	850
EC043 1M4 A	12	M3K	1200	1144	1100	1000	880
EC043 2M4 A	12	M3K	1420	1357	1300	1200	1040
EC043 2L4 A	12	M3K	1618	1550	1482	1368	1186
EC043 VL4 A	12	M3K	1824	1765	1700	1540	1360
EC046 1S4 A	12	M3K	1847	1770	1710	1530	1368
EC046 1.5S4 A	12	M3K	2030	1936	1880	1690	1504
EC046 2S4 A	12	M3K	2213	2122	2050	1820	1640
EC046 1L4 A	12	M3K	2582	2473	2390	2150	1912
EC046 1.5L4 A	12	M3K	2829	2715	2620	2330	2096
EC046 2L4 A	12	M3K	3067	2939	2840	2550	2272
EC046 VL4 A	12	M3K	3375	3234	3125	2800	2500
EC047LV 1S4 B	4	M3Ks-HD	3622	3472	3355	3018	2684
EC047LV 2S4 B	4	M3Ks-HD	3860	3700	3575	3216	2860
EC047LV 2M4 B	4	M3Ks-HD	4158	3984	3850	3464	3080
EC047LV 1L4 B	4	M3Ks-HD	4906	4702	4543	4088	3634

254 Δ Δ / 440 Δ Δ / 508 Δ Δ / 880 Δ Δ Volts

MECCALTE INDUSTRIAL

2 OF 2

"All machines have 300% short circuit capability.

On ECP3-ECO46 range the voltage regulator is feeded by auxiliary winding.

On ECO47 the voltage regulator is feeded by PMG.

Indicated rating references to series or parallel star connection as published table.

On ECO40, ECO43, ECO46 and ECO47 the standard connection is parallel star. For any different configuration please consult Meccalte representative".

Warning: Using a standard winding of a prescribed voltage and then adjusting to a different voltage, can lead to performances different to those published for the rated voltage of that winding. This may be in regard to power, efficiency, reactance, transient responses and overload ability. It is therefore recommended to visit the <http://support.meccalte.com> website and the DDS area specifically to produce a custom datasheet for the voltage requested. In this way you are assured of the correct performances.

4 Pole | 415V

60 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 120 / 208 / 240 / 415 Volts
Winding: Standard
RPM: 1800
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP3 1S4 C	12	M2K	7,5	7,2	7	6,5	5,6
ECP3 2S4 C	12	M2K	9,8	9,4	9	7,5	7,2
ECP3 1L4 C	12	M2K	12,9	12,4	12	11	9,6
ECP3 2L4 C	12	M2K	15,1	14,6	14	12,5	11,2
ECP3 3L4 C	12	M2K	17,1	16,7	16	14,5	12,8
ECP4 1M4 C	12	M2K	7,7	7,2	7	6,5	5,6
ECP4 2M4 C	12	M2K	9,9	9,4	9	7,5	7,2
ECP4 3M4 C	12	M2K	11,5	10,7	10,5	9,5	8,4
ECP4 4M4 C	12	M2K	14,3	13,3	13	12	10,4
ECP4 5M4 C	12	M2K	17	15,9	15,4	14,6	12,4
ECP4 1L4 C	12	M2K	20,6	19	18,5	17	14,8
ECP4 2L4 C	12	M2K	23	22	21	19	16,8
ECP28 1VS4 C	12	M2K	8,8	8,3	8	7,2	6,4
ECP28 2VS4 C	12	M2K	11,5	10,7	10,5	9,5	8,4
ECP28 1S4 C	12	M2K	14,3	13,3	13	12	10,4
ECP28 2S4 C	12	M2K	17	15,9	15,4	14,6	12,4
ECP28 3S4 C	12	M2K	19,8	18,5	18	17	14,4
ECP28 M4 C	12	M2K	23,1	21,5	21	19	16,8
ECP28 L4 C	12	M2K	28,6	26,5	26	24	20,8
ECP28 VL4 C	12	M2K	36,3	33,5	33	29	26,4
ECP30 1M4 C	12	M2K	23,1	21,5	21	19	16,8
ECP30 2M4 C	12	M2K	28,6	27	26	24	20,8
ECP30 3M4 C	12	M2K	36,3	34	33	29	26,4
ECP30 1L4 C	12	M2K	42,4	39	38,5	34	30,8
ECP30 2L4 C	12	M2K	48,4	45	44	39	35,2
ECP30 3L4 C	12	M2K	51,5	48,9	48,1	41,7	38,5
ECP32 1S4 C	12	M2K	43,5	42	39,5	37	31,6
ECP32 2S4 C	12	M2K	52	50	47	43	37,6
ECP32 1M4 C	12	M2K	60,5	58	55	53	44
ECP32 2M4 C	12	M2K	76	71	69	63	55,2
ECP32 1L4 C	12	M2K	86	81	78	73	62,4
ECP32 2L4 C	12	M2K	97	90	88	81	70,4
ECP34 1S4 C	12	M2K	108	104	98	88	78
ECP34 2S4 C	12	M2K	120	114	110	99	88
ECP34 1M4 C	12	M2K	143	137	130	116	104
ECP34 2M4 C	12	M2K	154	148	140	125	112
ECP34 1L4 C	12	M2K	165	158	150	132	120
ECP34 2L4 C	12	M2K	187	179	170	155	136
ECO38 1S4 C	12	M2K	225	220	210	195	168
ECO38 2S4 C	12	M2K	253	242	230	210	184
ECO38 1M4 C	12	M2K	289	274	260	240	208
ECO38 2M4 C	12	M2K	319	305	290	270	232
ECO38 1L4 C	12	M2K	358	341	325	300	260
ECO38 2L4 C	12	M2K	402	391	380	350	304
ECO38 VL4 C	12	M2K	413	401	390	359	312

120 Δ Δ / 208 Δ Δ / 240 Δ Δ / 415 Δ Δ Volts

MECC ALTE INDUSTRIAL

4 Pole | 415V

60 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 240 / 415 / 480 / 830 Volts
Winding: Standard
RPM: 1800
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECO40 1S4 C	12	M3K	459	438	420	383	336
ECO40 2S4 C	12	M3K	524	500	480	435	384
ECO40 3S4 C	12	M3K	590	563	540	484	432
ECO40 1L4 C	12	M3K	623	587	570	515	456
ECO40 2L4 C	12	M3K	720	688	665	605	532
ECO40 3L4 C	12	M3K	778	741	720	665	576
ECO40 VL4 C	12	M3K	930	885	860	790	688
ECO43 1S4 A	12	M3K	990	945	900	820	720
ECO43 2S4 A	12	M3K	1115	1069	1020	935	816
ECO43 1M4 A	12	M3K	1147	1117	1050	960	840
ECO43 2M4 A	12	M3K	1300	1250	1200	1090	960
ECO43 2L4 A	12	M3K	1585	1516	1451	1339	1161
ECO43 VL4 A	12	M3K	1736	1680	1600	1450	1280
ECO46 1S4 A	12	M3K	1728	1656	1600	1440	1280
ECO46 1.5S4 A	12	M3K	1870	1782	1730	1570	1384
ECO46 2S4 A	12	M3K	2116	2028	1950	1750	1560
ECO46 1L4 A	12	M3K	2480	2370	2300	2070	1840
ECO46 1.5L4 A	12	M3K	2613	2508	2420	2150	1936
ECO46 2L4 A	12	M3K	2920	2800	2700	2430	2160
ECO46 VL4 A	12	M3K	3136	3007	2900	2600	2320
ECO47LV 1S4 B	4	M3Ks-HD	3416	3274	3164	2846	2530
ECO47LV 2S4 B	4	M3Ks-HD	3640	3488	3372	3034	2696
ECO47LV 2M4 B	4	M3Ks-HD	3920	3758	3631	3268	2904
ECO47LV 1L4 B	4	M3Ks-HD	4626	4434	4285	3856	3426

240 Δ Δ / 415 Λ Λ / 480 Δ / 830 Λ Volts

MECCALTE INDUSTRIAL

2 OF 2

"All machines have 300% short circuit capability.

On ECP3-ECO46 range the voltage regulator is fed by auxiliary winding.

On ECO47 the voltage regulator is fed by PMG.

Indicated rating references to series or parallel star connection as published table.

On ECO40, ECO43, ECO46 and ECO47 the standard connection is parallel star. For any different configuration please consult Meccalte representative".

Warning: Using a standard winding of a prescribed voltage and then adjusting to a different voltage, can lead to performances different to those published for the rated voltage of that winding. This may be in regard to power, efficiency, reactance, transient responses and overload ability. It is therefore recommended to visit the <http://support.meccalte.com> website and the DDS area specifically to produce a custom datasheet for the voltage requested. In this way you are assured of the correct performances.

4 Pole | 415V - 440V - 460V - 480V

60 Hz | 3 Phase | 0.8 PF | AVR Controlled

Winding: Standard - Broad Voltage
RPM: 1800
Insulation: Class H



MECC ALTE INDUSTRIAL

MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP3 1S4 C	12	M2K	7,5	7,2	7	6,5	5,6
ECP3 2S4 C	12	M2K	9,8	9,4	9	7,5	7,2
ECP3 1L4 C	12	M2K	12,9	12,4	12	11	9,6
ECP3 2L4 C	12	M2K	15,1	14,6	14	12,5	11,2
ECP3 3L4 C	12	M2K	17,1	16,7	16	14,5	12,8
ECP4 1M4 C	12	M2K	7,7	7,2	7	6,5	5,6
ECP4 2M4 C	12	M2K	9,9	9,4	9	7,5	7,2
ECP4 3M4 C	12	M2K	11,5	10,7	10,5	9,5	8,4
ECP4 4M4 C	12	M2K	14,3	13,3	13	12	10,4
ECP4 5M4 C	12	M2K	17	15,9	15,4	14,6	12,4
ECP4 1L4 C	12	M2K	20,6	19	18,5	17	14,8
ECP4 2L4 C	12	M2K	23	22	21	19	16,8
ECP28 1VS4 C	12	M2K	8,8	8,3	8	7,2	6,4
ECP28 2VS4 C	12	M2K	11,5	10,7	10,5	9,5	8,4
ECP28 1S4 C	12	M2K	14,3	13,3	13	12	10,4
ECP28 2S4 C	12	M2K	17	15,9	15,4	14,6	12,4
ECP28 3S4 C	12	M2K	19,8	18,5	18	17	14,4
ECP28 M4 C	12	M2K	23,1	21,5	21	19	16,8
ECP28 L4 C	12	M2K	28,6	26,5	26	24	20,8
ECP28 VL4 C	12	M2K	36,3	33,5	33	29	26,4
ECP30 1M4 C	12	M2K	23,1	21,5	21	19	16,8
ECP30 2M4 C	12	M2K	28,6	27	26	24	20,8
ECP30 3M4 C	12	M2K	36,3	34	33	29	26,4
ECP30 1L4 C	12	M2K	42,4	39	38,5	34	30,8
ECP30 2L4 C	12	M2K	48,4	45	44	39	35,2
ECP30 3L4 C	12	M2K	51,5	48,9	48,1	41,7	38,5
ECP32 1S4 C	12	M2K	43,5	42	39,5	37	31,6
ECP32 2S4 C	12	M2K	52	50	47	43	37,6
ECP32 1M4 C	12	M2K	60,5	58	55	53	44
ECP32 2M4 C	12	M2K	76	71	69	63	55,2
ECP32 1L4 C	12	M2K	86	81	78	73	62,4
ECP32 2L4 C	12	M2K	97	90	88	81	70,4
ECP34 1S4 C	12	M2K	108	104	98	88	78
ECP34 2S4 C	12	M2K	120	114	110	99	88
ECP34 1M4 C	12	M2K	143	137	130	116	104
ECP34 2M4 C	12	M2K	154	148	140	125	112
ECP34 1L4 C	12	M2K	165	158	150	132	120
ECP34 2L4 C	12	M2K	187	179	170	155	136
ECO38 1S4 C	12	M2K	225	220	210	195	168
ECO38 2S4 C	12	M2K	253	242	230	210	184
ECO38 1M4 C	12	M2K	289	274	260	240	208
ECO38 2M4 C	12	M2K	319	305	290	270	232
ECO38 1L4 C	12	M2K	358	341	325	300	260
ECO38 2L4 C	12	M2K	402	391	380	350	304
ECO38 VL4 C	12	M2K	413	401	390	359	312

4 Pole | 415V - 440V - 460V - 480V

60 Hz | 3 Phase | 0.8 PF | AVR Controlled

Winding: Standard - Broad Voltage
RPM: 1800
Insulation: Class H



MECCALTE INDUSTRIAL

MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
EC040 1S4 C	12	M3K	459	438	420	383	336
EC040 2S4 C	12	M3K	524	500	480	435	384
EC040 3S4 C	12	M3K	590	563	540	484	432
EC040 1L4 C	12	M3K	623	587	570	515	456
EC040 2L4 C	12	M3K	720	688	665	605	532
EC040 3L4 C	12	M3K	778	741	720	665	576
EC040 VL4 C	12	M3K	930	885	860	790	688
EC043 1S4 A	12	M3K	990	945	900	820	720
EC043 2S4 A	12	M3K	1115	1069	1020	935	816
EC043 1M4 A	12	M3K	1147	1117	1050	960	840
EC043 2M4 A	12	M3K	1300	1250	1200	1090	960
EC043 2L4 A	12	M3K	1585	1516	1451	1339	1161
EC043 VL4 A	12	M3K	1736	1680	1600	1450	1280
EC046 1S4 A	12	M3K	1728	1656	1600	1440	1280
EC046 1.5S4 A	12	M3K	1870	1782	1730	1570	1384
EC046 2S4 A	12	M3K	2116	2028	1950	1750	1560
EC046 1L4 A	12	M3K	2480	2370	2300	2070	1840
EC046 1.5L4 A	12	M3K	2613	2508	2420	2150	1936
EC046 2L4 A	12	M3K	2920	2800	2700	2430	2160
EC046 VL4 A	12	M3K	3136	3007	2900	2600	2320
EC047LV 1S4 B	4	M3Ks-HD	3416	3274	3164	2846	2530
EC047LV 2S4 B	4	M3Ks-HD	3640	3488	3372	3034	2696
EC047LV 2M4 B	4	M3Ks-HD	3920	3758	3631	3268	2904
EC047LV 1L4 B	4	M3Ks-HD	4626	4434	4285	3856	3426

2 OF 2

"All machines have 300% short circuit capability.

On ECP3-ECO46 range the voltage regulator is feeded by auxiliary winding.

On ECO47 the voltage regulator is feeded by PMG.

Indicated rating references to series or parallel star connection as published table.

On ECO40, ECO43, ECO46 and ECO47 the standard connection is parallel star. For any different configuration please consult Meccalte representative".

Warning: Using a standard winding of a prescribed voltage and then adjusting to a different voltage, can lead to performances different to those published for the rated voltage of that winding. This may be in regard to power, efficiency, reactance, transient responses and overload ability. It is therefore recommended to visit the <http://support.meccalte.com> website and the DDS area specifically to produce a custom datasheet for the voltage requested. In this way you are assured of the correct performances.

4 Pole | 400V

60 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 116 / 200 / 231 / 400 Volts
Winding: Standard
RPM: 1800
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP3 1S4 C	12	M2K	7,3	7,1	6,8	6,2	5,4
ECP3 2S4 C	12	M2K	9,3	8,9	8,5	7,8	6,8
ECP3 1L4 C	12	M2K	12,4	11,9	11,5	10,5	9,2
ECP3 2L4 C	12	M2K	14,8	14,3	13,8	12,6	11
ECP3 3L4 C	12	M2K	16,6	16	15,5	14,2	12,4
ECP4 1M4 C	12	M2K	7,4	7,1	6,8	6,2	5,4
ECP4 2M4 C	12	M2K	9,3	8,9	8,5	7,8	6,8
ECP4 3M4 C	12	M2K	11,2	10,5	10,2	9,3	8,1
ECP4 4M4 C	12	M2K	14,1	13,1	12,8	12,1	10,2
ECP4 5M4 C	12	M2K	16,8	15,7	15,3	14,4	12,2
ECP4 1L4 C	12	M2K	20,3	19	18,3	17	14,6
ECP4 2L4 C	12	M2K	22,6	21	20,5	19	16,4
ECP28 1VS4 C	12	M2K	8,6	8	7,8	7	6,2
ECP28 2VS4 C	12	M2K	11,2	10,5	10,2	9,3	8,1
ECP28 1S4 C	12	M2K	14,1	13,1	12,8	12,1	10,2
ECP28 2S4 C	12	M2K	16,8	15,7	15,3	14,4	12,2
ECP28 3S4 C	12	M2K	19,6	18,3	17,8	16,8	14,2
ECP28 M4 C	12	M2K	22,5	20,9	20,5	19	16,4
ECP28 L4 C	12	M2K	28	26	25,5	23,5	20,4
ECP28 VL4 C	12	M2K	34,6	32,4	31,5	27,3	25,2
ECP30 1M4 C	12	M2K	22,5	20,9	20,5	19	16,4
ECP30 2M4 C	12	M2K	28	26	25,5	24	20,4
ECP30 3M4 C	12	M2K	34,7	32	31,5	27	25,2
ECP30 1L4 C	12	M2K	40,4	38	36,8	32	29,4
ECP30 2L4 C	12	M2K	46,1	43	42	36	33,6
ECP30 3L4 C	12	M2K	49,2	46,7	45,9	39,8	36,8
ECP32 1S4 C	12	M2K	41	39	37,5	35	30
ECP32 2S4 C	12	M2K	50	49	45	41	36
ECP32 1M4 C	12	M2K	55	53	50	48	40
ECP32 2M4 C	12	M2K	68,8	65	62,5	58	50
ECP32 1L4 C	12	M2K	82,5	80	75	67	60
ECP32 2L4 C	12	M2K	95	89	86	77	68,8
ECP34 1S4 C	12	M2K	99	96	90	82	72
ECP34 2S4 C	12	M2K	115	109	105	95	84
ECP34 1M4 C	12	M2K	143	137	130	117	104
ECP34 2M4 C	12	M2K	154	148	140	126	112
ECP34 1L4 C	12	M2K	165	158	150	132	120
ECP34 2L4 C	12	M2K	187	178	170	155	136
ECO38 1S4 C	12	M2K	212	204	195	185	156
ECO38 2S4 C	12	M2K	235	224	213	197	170
ECO38 1M4 C	12	M2K	265	252	240	220	192
ECO38 2M4 C	12	M2K	297	284	270	250	216
ECO38 1L4 C	12	M2K	345	330	315	290	252
ECO38 2L4 C	12	M2K	408	388	370	340	296
ECO38 VL4 C	12	M2K	419	398	380	349	304

115 Δ Δ / 200 Δ Δ / 230 Δ / 400 Δ Volts

MECC ALTE INDUSTRIAL

4 Pole | 400V

60 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 231 / 400 / 462 / 800 Volts
Winding: Standard
RPM: 1800
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECO40 1S4 C	12	M3K	448	427	410	375	328
ECO40 2S4 C	12	M3K	513	490	470	430	376
ECO40 3S4 C	12	M3K	569	540	520	465	416
ECO40 1L4 C	12	M3K	623	587	570	515	456
ECO40 2L4 C	12	M3K	708	678	655	600	524
ECO40 3L4 C	12	M3K	768	731	710	650	568
ECO40 VL4 C	12	M3K	885	844	820	755	656
ECO43 1S4 A	12	M3K	955	910	870	800	700
ECO43 2S4 A	12	M3K	1071	1027	980	900	784
ECO43 1M4 A	12	M3K	1173	1124	1075	985	860
ECO43 2M4 A	12	M3K	1310	1254	1200	1100	960
ECO43 2L4 A	12	M3K	1497	1430	1370	1256	1096
ECO43 VL4 A	12	M3K	1556	1505	1450	1325	1160
ECO46 1S4 A	12	M3K	1707	1641	1580	1450	1313
ECO46 1.5S4 A	12	M3K	1852	1761	1710	1570	1368
ECO46 2S4 A	12	M3K	2054	1967	1900	1720	1520
ECO46 1L4 A	12	M3K	2373	2276	2200	2000	1760
ECO46 1.5L4 A	12	M3K	2578	2470	2385	2120	1908
ECO46 2L4 A	12	M3K	2810	2690	2600	2380	2080
ECO46 VL4 A	12	M3K	3136	3007	2900	2600	2320
ECO47LV 1S4 B	4	M3Ks-HD	3294	3156	3050	2744	2440
ECO47LV 2S4 B	4	M3Ks-HD	3510	3362	3250	2924	2600
ECO47LV 2M4 B	4	M3Ks-HD	3780	3622	3500	3150	2800
ECO47LV 1L4 B	4	M3Ks-HD	4460	4274	4130	3716	3304

230 Δ Δ / 400 Λ Λ / 460 Δ Δ / 800 Λ Λ Volts

MECCALTE INDUSTRIAL

2 OF 2

"All machines have 300% short circuit capability.

On ECP3-ECO46 range the voltage regulator is fed by auxiliary winding.

On ECO47 the voltage regulator is fed by PMG.

Indicated rating references to series or parallel star connection as published table.

On ECO40, ECO43, ECO46 and ECO47 the standard connection is parallel star. For any different configuration please consult Meccalte representative".

Warning: Using a standard winding of a prescribed voltage and then adjusting to a different voltage, can lead to performances different to those published for the rated voltage of that winding. This may be in regard to power, efficiency, reactance, transient responses and overload ability. It is therefore recommended to visit the <http://support.meccalte.com> website and the DDS area specifically to produce a custom datasheet for the voltage requested. In this way you are assured of the correct performances.

4 Pole | 380V

60 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 110 / 190 / 220 / 380 Volts
Winding: Standard
RPM: 1800
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP3 1S4 C	12	M2K	7	6,8	6,5	6	5,2
ECP3 2S4 C	12	M2K	8,8	8,3	8	7,3	6,4
ECP3 1L4 C	12	M2K	11,8	11,4	11	10	8,8
ECP3 2L4 C	12	M2K	14,5	14	13,5	12,3	10,8
ECP3 3L4 C	12	M2K	16	15,5	15	13,7	12
ECP4 1M4 C	12	M2K	7,1	6,8	6,5	6	5,2
ECP4 2M4 C	12	M2K	8,8	8,3	8	7,3	6,4
ECP4 3M4 C	12	M2K	11	10,3	10	9,1	8
ECP4 4M4 C	12	M2K	13,7	12,9	12,5	11,6	10
ECP4 5M4 C	12	M2K	16,5	15,4	15	14,1	12
ECP4 1L4 C	12	M2K	20	19	18	17	14,4
ECP4 2L4 C	12	M2K	22	21	20	19	16
ECP28 1VS4 C	12	M2K	8,2	7,8	7,5	6,7	6
ECP28 2VS4 C	12	M2K	11	10,3	10	9,1	8
ECP28 1S4 C	12	M2K	13,7	12,9	12,5	11,6	10
ECP28 2S4 C	12	M2K	16,5	15,4	15	14,1	12
ECP28 3S4 C	12	M2K	19,3	18	17,5	16,5	14
ECP28 M4 C	12	M2K	22	20,5	20	18,5	16
ECP28 L4 C	12	M2K	27,5	25,5	25	23	20
ECP28 VL4 C	12	M2K	33	31	30	26	24
ECP30 1M4 C	12	M2K	22	20,5	20	18,5	16
ECP30 2M4 C	12	M2K	27,5	26	25	23	20
ECP30 3M4 C	12	M2K	33	31	30	26	24
ECP30 1L4 C	12	M2K	38,5	36	35	30	28
ECP30 2L4 C	12	M2K	44	41	40	35	32
ECP30 3L4 C	12	M2K	46,8	44,5	43,8	37,9	35
ECP32 1S4 C	12	M2K	41	39	37	35	29,6
ECP32 2S4 C	12	M2K	48	47	44	40	35,2
ECP32 1M4 C	12	M2K	55	53	50	48	40
ECP32 2M4 C	12	M2K	68	64	62	57	49,6
ECP32 1L4 C	12	M2K	82,5	80	75	67	60
ECP32 2L4 C	12	M2K	91	86	83	75	66,4
ECP34 1S4 C	12	M2K	96	93	88	79	70
ECP34 2S4 C	12	M2K	110	105	100	90	80
ECP34 1M4 C	12	M2K	137	132	125	113	100
ECP34 2M4 C	12	M2K	148	143	135	122	108
ECP34 1L4 C	12	M2K	165	158	150	136	120
ECP34 2L4 C	12	M2K	181	174	165	149	132
ECO38 1S4 C	12	M2K	196	188	180	170	144
ECO38 2S4 C	12	M2K	220	211	200	185	160
ECO38 1M4 C	12	M2K	250	237	225	207	180
ECO38 2M4 C	12	M2K	275	263	250	230	200
ECO38 1L4 C	12	M2K	330	315	300	275	240
ECO38 2L4 C	12	M2K	370	360	350	320	280
ECO38 VL4 C	12	M2K	380	370	360	329	288

110 Δ Δ / 190 Δ Δ / 220 Δ Δ / 380 Δ Δ Volts

MECC ALTE INDUSTRIAL

4 Pole | 380V

60 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 220 / 380 / 439 / 760 Volts
Winding: Standard
RPM: 1800
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECO40 1S4 C	12	M3K	448	427	410	375	328
ECO40 2S4 C	12	M3K	502	480	460	421	368
ECO40 3S4 C	12	M3K	558	531	510	467	408
ECO40 1L4 C	12	M3K	613	577	560	513	448
ECO40 2L4 C	12	M3K	686	657	635	580	508
ECO40 3L4 C	12	M3K	746	710	690	632	552
ECO40 VL4 C	12	M3K	824	785	763	700	610
ECO43 1S4 A	12	M3K	920	880	840	765	670
ECO43 2S4 A	12	M3K	1038	996	950	871	760
ECO43 1M4 A	12	M3K	1140	1093	1045	957	836
ECO43 2M4 A	12	M3K	1278	1223	1170	1072	936
ECO43 2L4 A	12	M3K	1442	1379	1320	1210	1056
ECO43 VL4 A	12	M3K	1502	1453	1400	1280	1120
ECO46 1S4 A	12	M3K	1675	1610	1550	1420	1240
ECO46 1.5S4 A	12	M3K	1830	1740	1690	1550	1350
ECO46 2S4 A	12	M3K	2000	1915	1850	1705	1480
ECO46 1L4 A	12	M3K	2330	2235	2160	1980	1730
ECO46 1.5L4 A	12	M3K	2540	2435	2350	2155	1880
ECO46 2L4 A	12	M3K	2780	2660	2570	2355	2060
ECO46 VL4 A	12	M3K	3080	2950	2850	2550	2280
ECO47LV 1S4 B	4	M3Ks-HD	3128	2998	2898	2606	2318
ECO47LV 2S4 B	4	M3Ks-HD	3334	3194	3088	2778	2470
ECO47LV 2M4 B	4	M3Ks-HD	3590	3440	3325	2992	2660
ECO47LV 1L4 B	4	M3Ks-HD	4236	4060	3924	3530	3138

220 Δ Δ / 380 Λ Λ / 440 Δ / 760 Λ Volts

MECCALTE INDUSTRIAL

2 OF 2

"All machines have 300% short circuit capability.

On ECP3-ECO46 range the voltage regulator is fed by auxiliary winding.

On ECO47 the voltage regulator is fed by PMG.

Indicated rating references to series or parallel star connection as published table.

On ECO40, ECO43, ECO46 and ECO47 the standard connection is parallel star. For any different configuration please consult Meccalte representative".

Warning: Using a standard winding of a prescribed voltage and then adjusting to a different voltage, can lead to performances different to those published for the rated voltage of that winding. This may be in regard to power, efficiency, reactance, transient responses and overload ability. It is therefore recommended to visit the <http://support.meccalte.com> website and the DDS area specifically to produce a custom datasheet for the voltage requested. In this way you are assured of the correct performances.

4 Pole | 380V

60 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 110 / 190 / 220 / 380 Volts
Winding: Dedicated
RPM: 1800
Insulation: Class H



MECC ALTE INDUSTRIAL

MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP3 1S4 C	12	M2K	8,4	8	7,8	7,2	6,2
ECP3 2S4 C	12	M2K	10,5	10	9,6	9	7,7
ECP3 1L4 C	12	M2K	14,3	13,8	13,2	12	10,6
ECP3 2L4 C	12	M2K	17,5	16,9	16,2	15	13
ECP3 3L4 C	12	M2K	19,3	18,8	18	16,5	14,4
ECP4 1M4 C	12	M2K	8,5	8	7,8	7,2	6,2
ECP4 2M4 C	12	M2K	10,5	10	9,6	9	7,7
ECP4 3M4 C	12	M2K	13,2	12,4	12	10,9	9,6
ECP4 4M4 C	12	M2K	16,5	15,5	15	13,9	12
ECP4 5M4 C	12	M2K	19,8	18,5	18	16,8	14,4
ECP4 1L4 C	12	M2K	24	22,2	22	20,2	17,6
ECP4 2L4 C	12	M2K	26,4	24,6	24	22	19,2
ECP28 1VS4 C	12	M2K	9,9	9,3	9	8,2	7,2
ECP28 2VS4 C	12	M2K	13,2	12,4	12	10,9	9,6
ECP28 1S4 C	12	M2K	16,5	15,5	15	13,9	12
ECP28 2S4 C	12	M2K	19,8	18,5	18	16,8	14,4
ECP28 3S4 C	12	M2K	23	21,6	21	19,6	16,8
ECP28 M4 C	12	M2K	26,4	24,6	24	22	19,2
ECP28 L4 C	12	M2K	33	30,6	30	27,5	24
ECP28 VL4 C	12	M2K	39,6	36,6	36	32	29
ECP30 1M4 C	12	M2K	26,4	24,6	24	22	19,2
ECP30 2M4 C	12	M2K	33	30,6	30	27,5	24
ECP30 3M4 C	12	M2K	39,6	36,6	36	32	28,8
ECP30 1L4 C	12	M2K	46,2	42,7	42	37,3	33,6
ECP30 2L4 C	12	M2K	52,8	48,8	48	42,7	38,4
ECP30 3L4 C	12	M2K	57,8	53,4	52,5	59	42
ECP32 1S4 C	12	M2K	49,5	47	45	43	36
ECP32 2S4 C	12	M2K	59	57	54	52	43,2
ECP32 1M4 C	12	M2K	66	63	60	58	48
ECP32 2M4 C	12	M2K	82,5	77,5	75	71,5	60
ECP32 1L4 C	12	M2K	99	93,7	90	83	72
ECP32 2L4 C	12	M2K	110	102	100	92	80
ECP34 1S4 C	12	M2K	115	111	105	95	84
ECP34 2S4 C	12	M2K	132	126	120	109	96
ECP34 1M4 C	12	M2K	165	159	150	135	120
ECP34 2M4 C	12	M2K	178	172	162	146	130
ECP34 1L4 C	12	M2K	198	189	180	163	144
ECP34 2L4 C	12	M2K	218	208	198	178	158
ECO38 1S4 C	12	M2K	236	230	220	205	176
ECO38 2S4 C	12	M2K	264	253	240	220	192
ECO38 1M4 C	12	M2K	300	284	270	250	216
ECO38 2M4 C	12	M2K	330	316	300	280	240
ECO38 1L4 C	12	M2K	396	378	360	330	288
ECO38 2L4 C	12	M2K	444	438	420	385	336
ECO38 VL4 C	12	M2K	465	453	440	403	352

4 Pole | 380V

60 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 220 / 380 / 439 / 760 Volts
Winding: Dedicated
RPM: 1800
Insulation: Class H



MECC ALTE INDUSTRIAL

MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
EC040 1S4 C	12	M3K	525	500	480	440	384
EC040 2S4 C	12	M3K	590	563	540	490	432
EC040 3S4 C	12	M3K	660	625	600	540	480
EC040 1L4 C	12	M3K	690	650	630	573	504
EC040 2L4 C	12	M3K	810	775	750	677	600
EC040 3L4 C	12	M3K	882	840	816	756	653
EC040 VL4 C	12	M3K	970	925	900	830	720
EC043 1S4 A	12	M3K	1050	1008	960	875	768
EC043 2S4 A	12	M3K	1220	1170	1116	1020	893
EC043 1M4 A	12	M3K	1365	1300	1250	1140	1000
EC043 2M4 A	12	M3K	1442	1380	1320	1200	1056
EC043 2L4 A	12	M3K	1700	1630	1560	1440	1248
EC043 VL4 A	12	M3K	1717	1660	1600	1450	1280
EC046 1S4 A	12	M3K	1944	1875	1800	1620	1440
EC046 1.5S4 A	12	M3K	2055	1960	1900	1710	1520
EC046 2S4 A	12	M3K	2160	2070	2000	1780	1600
EC046 1L4 A	12	M3K	2700	2590	2500	2265	2000
EC046 1.5L4 A	12	M3K	-	-	-	-	-
EC046 2L4 A	12	M3K	2915	2795	2700	2430	2160
EC046 VL4 A	12	M3K	-	-	-	-	-
EC047LV 1S4 B	4	M3Ks-HD	3960	3794	3667	3300	2932
EC047LV 2S4 B	4	M3Ks-HD	4212	4034	3900	3508	3120
EC047LV 2M4 B	4	M3Ks-HD	4536	4346	4200	3780	3360
EC047LV 1L4 B	4	M3Ks-HD	5352	5128	4956	4458	3964

2 OF 2

All machines have an auxiliary winding 'standard' with 300% short circuit capability.

These are 'special' machines.

Check factory for delivery lead times.

4 Pole | 600V

60 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 174 / 300 / 347 / 600 Volts
Winding: Dedicated
RPM: 1800
Insulation: Class H



MECC ALTE INDUSTRIAL

MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP3 1S4 C	12	M2K	8,4	8	7,8	7,2	6,2
ECP3 2S4 C	12	M2K	10,5	10	9,6	9	7,7
ECP3 1L4 C	12	M2K	14,3	13,8	13,2	12	10,6
ECP3 2L4 C	12	M2K	17,5	16,9	16,2	15	13
ECP3 3L4 C	12	M2K	19,3	18,8	18	16,5	14,4
ECP4 1M4 C	12	M2K	8,5	8	7,8	7,2	6,2
ECP4 2M4 C	12	M2K	10,5	10	9,6	9	7,7
ECP4 3M4 C	12	M2K	13,2	12,4	12	10,9	9,6
ECP4 4M4 C	12	M2K	16,5	15,5	15	13,9	12
ECP4 5M4 C	12	M2K	19,8	18,5	18	16,8	14,4
ECP4 1L4 C	12	M2K	24	22,2	22	20,2	17,6
ECP4 2L4 C	12	M2K	26,4	24,6	24	22	19,2
ECP28 1VS4 C	12	M2K	9,9	9,3	9	8,2	7,2
ECP28 2VS4 C	12	M2K	13,2	12,4	12	10,9	9,6
ECP28 1S4 C	12	M2K	16,5	15,5	15	13,9	12
ECP28 2S4 C	12	M2K	19,8	18,5	18	16,8	14,4
ECP28 3S4 C	12	M2K	23	21,6	21	19,6	16,8
ECP28 M4 C	12	M2K	26,4	24,6	24	22	19,2
ECP28 L4 C	12	M2K	33	30,6	30	27,5	24
ECP28 VL4 C	12	M2K	39,6	36,6	36	32	29
ECP30 1M4 C	12	M2K	26,4	24,6	24	22	19,2
ECP30 2M4 C	12	M2K	33	30,6	30	27,5	24
ECP30 3M4 C	12	M2K	39,6	36,6	36	32	28,8
ECP30 1L4 C	12	M2K	46,2	42,7	42	37,3	33,6
ECP30 2L4 C	12	M2K	52,8	48,8	48	42,7	38,4
ECP30 3L4 C	12	M2K	57,8	53,4	52,5	59	42
ECP32 1S4 C	12	M2K	49,5	47	45	43	36
ECP32 2S4 C	12	M2K	59	57	54	52	43,2
ECP32 1M4 C	12	M2K	66	63	60	58	48
ECP32 2M4 C	12	M2K	82,5	77,5	75	71,5	60
ECP32 1L4 C	12	M2K	99	93,7	90	83	72
ECP32 2L4 C	12	M2K	110	102	100	92	80
ECP34 1S4 C	12	M2K	115	111	105	95	84
ECP34 2S4 C	12	M2K	132	126	120	109	96
ECP34 1M4 C	12	M2K	165	159	150	135	120
ECP34 2M4 C	12	M2K	178	172	162	146	130
ECP34 1L4 C	12	M2K	198	189	180	163	144
ECP34 2L4 C	12	M2K	218	208	198	178	158
ECO38 1S4 C	12	M2K	236	230	220	205	176
ECO38 2S4 C	12	M2K	264	253	240	220	192
ECO38 1M4 C	12	M2K	300	284	270	250	216
ECO38 2M4 C	12	M2K	308	295	280	260	224
ECO38 1L4 C	12	M2K	396	378	360	330	288
ECO38 2L4 C	12	M2K	444	438	420	385	336
ECO38 VL4 C	12	M2K	465	453	440	403	352

4 Pole | 600V

60 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 347 / 600 / 694 / 1200 Volts
Winding: Dedicated
RPM: 1800
Insulation: Class H



MECC ALTE INDUSTRIAL

MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
EC040 1S4 C	12	M3K	525	500	480	440	384
EC040 2S4 C	12	M3K	590	563	540	490	432
EC040 3S4 C	12	M3K	660	625	600	540	480
EC040 1L4 C	12	M3K	722	680	660	600	528
EC040 2L4 C	12	M3K	810	775	750	677	600
EC040 3L4 C	12	M3K	832	793	770	713	616
EC040 VL4 C	12	M3K	892	843	820	756	656
EC043 1S4 A	12	M3K	1050	1008	960	875	768
EC043 2S4 A	12	M3K	1220	1170	1116	1020	893
EC043 1M4 A	12	M3K	1365	1300	1250	1140	1000
EC043 2M4 A	12	M3K	1525	1450	1400	1300	1120
EC043 2L4 A	12	M3K	1700	1630	1560	1440	1248
EC043 VL4 A	12	M3K	1920	1766	1680	1525	1344
EC046 1S4 A	12	M3K	1836	1760	1700	1530	1360
EC046 1.5S4 A	12	M3K	2140	2040	1980	1780	1584
EC046 2S4 A	12	M3K	2332	2236	2160	1920	1728
EC046 1L4 A	12	M3K	2560	2453	2370	2145	1896
EC046 1.5L4 A	12	M3K	2980	2860	2760	2460	2208
EC046 2L4 A	12	M3K	3240	3105	3000	2700	2400
EC046 VL4 A	12	M3K	3683	3529	3410	3050	2728
EC047LV 1S4 B	4	M3Ks-HD	3960	3794	3667	3300	2932
EC047LV 2S4 B	4	M3Ks-HD	4212	4034	3900	3508	3120
EC047LV 2M4 B	4	M3Ks-HD	4536	4346	4200	3780	3360
EC047LV 1L4 B	4	M3Ks-HD	5352	5128	4956	4458	3964

2 OF 2

All machines have an auxiliary winding 'standard' with 300% short circuit capability.

EC046: Refer to factory before ordering to assure winding is available at 600 Volts at the indicated rating.

These are 'special' machines.

Check factory for delivery lead times.

4 Pole | 690V

60 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 200 / 345 / 399 / 690 Volts
Winding: Dedicated
RPM: 1800
Insulation: Class H



MECC ALTE INDUSTRIAL

MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP3 1S4 C	12	M2K	8,4	8	7,8	7,2	6,2
ECP3 2S4 C	12	M2K	10,5	10	9,6	9	7,7
ECP3 1L4 C	12	M2K	14,3	13,8	13,2	12	10,6
ECP3 2L4 C	12	M2K	17,5	16,9	16,2	15	13
ECP3 3L4 C	12	M2K	19,3	18,8	18	16,5	14,4
ECP4 1M4 C	12	M2K	8,5	8	7,8	7,2	6,2
ECP4 2M4 C	12	M2K	10,5	10	9,6	9	7,7
ECP4 3M4 C	12	M2K	13,2	12,4	12	10,9	9,6
ECP4 4M4 C	12	M2K	16,5	15,5	15	13,9	12
ECP4 5M4 C	12	M2K	19,8	18,5	18	16,8	14,4
ECP4 1L4 C	12	M2K	24	22,2	22	20,2	17,6
ECP4 2L4 C	12	M2K	26,4	24,6	24	22	19,2
ECP28 1VS4 C	12	M2K	9,9	9,3	9	8,2	7,2
ECP28 2VS4 C	12	M2K	13,2	12,4	12	10,9	9,6
ECP28 1S4 C	12	M2K	16,5	15,5	15	13,9	12
ECP28 2S4 C	12	M2K	19,8	18,5	18	16,8	14,4
ECP28 3S4 C	12	M2K	23	21,6	21	19,6	16,8
ECP28 M4 C	12	M2K	26,4	24,6	24	22	19,2
ECP28 L4 C	12	M2K	33	30,6	30	27,5	24
ECP28 VL4 C	12	M2K	39,6	36,6	36	32	29
ECP30 1M4 C	12	M2K	26,4	24,6	24	22	19,2
ECP30 2M4 C	12	M2K	33	30,6	30	27,5	24
ECP30 3M4 C	12	M2K	39,6	36,6	36	32	28,8
ECP30 1L4 C	12	M2K	46,2	42,7	42	37,3	33,6
ECP30 2L4 C	12	M2K	52,8	48,8	48	42,7	38,4
ECP30 3L4 C	12	M2K	57,8	53,4	52,5	59	42
ECP32 1S4 C	12	M2K	49,5	47	45	43	36
ECP32 2S4 C	12	M2K	59	57	54	52	43,2
ECP32 1M4 C	12	M2K	66	63	60	58	48
ECP32 2M4 C	12	M2K	82,5	77,5	75	71,5	60
ECP32 1L4 C	12	M2K	99	93,7	90	83	72
ECP32 2L4 C	12	M2K	110	102	100	92	80
ECP34 1S4 C	12	M2K	115	111	105	95	84
ECP34 2S4 C	12	M2K	132	126	120	109	96
ECP34 1M4 C	12	M2K	165	159	150	135	120
ECP34 2M4 C	12	M2K	178	172	162	146	130
ECP34 1L4 C	12	M2K	198	189	180	163	144
ECP34 2L4 C	12	M2K	218	208	198	178	158
ECO38 1S4 C	12	M2K	236	230	220	205	176
ECO38 2S4 C	12	M2K	264	253	240	220	192
ECO38 1M4 C	12	M2K	300	284	270	250	216
ECO38 2M4 C	12	M2K	330	316	300	280	240
ECO38 1L4 C	12	M2K	396	378	360	330	288
ECO38 2L4 C	12	M2K	444	438	420	385	336
ECO38 VL4 C	12	M2K	465	453	440	403	352

4 Pole | 690V

60 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 399 / 690 / 798 / 1380 Volts
Winding: Dedicated
RPM: 1800
Insulation: Class H



MECC ALTE INDUSTRIAL

MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
EC040 1S4 C	12	M3K	525	500	480	440	384
EC040 2S4 C	12	M3K	590	563	540	490	432
EC040 3S4 C	12	M3K	660	625	600	540	480
EC040 1L4 C	12	M3K	722	680	660	600	528
EC040 2L4 C	12	M3K	810	775	750	677	600
EC040 3L4 C	12	M3K	882	840	816	756	653
EC040 VL4 C	12	M3K	970	925	900	830	720
EC043 1S4 A	12	M3K	1050	1008	960	875	768
EC043 2S4 A	12	M3K	1220	1170	1116	1020	893
EC043 1M4 A	12	M3K	1365	1300	1250	1140	1000
EC043 2M4 A	12	M3K	1525	1450	1400	1300	1120
EC043 2L4 A	12	M3K	1700	1630	1560	1440	1248
EC043 VL4 A	12	M3K	1800	1744	1680	1522	1344
EC046 1S4 A	12	M3K	1836	1766	1700	1530	1360
EC046 1.5S4 A	12	M3K	2140	2040	1980	1780	1584
EC046 2S4 A	12	M3K	2332	2236	2160	1920	1728
EC046 1L4 A	12	M3K	2592	2484	2400	2171	1920
EC046 1.5L4 A	12	M3K	2980	2860	2760	2460	2208
EC046 2L4 A	12	M3K	3240	3105	3000	2700	2400
EC046 VL4 A	12	M3K	3683	3529	3410	3050	2728
EC047LV 1S4 B	4	M3Ks-HD	*	*	*	*	*
EC047LV 2S4 B	4	M3Ks-HD	*	*	*	*	*
EC047LV 2M4 B	4	M3Ks-HD	*	*	*	*	*
EC047LV 1L4 B	4	M3Ks-HD	*	*	*	*	*

2 OF 2

*Special voltage for ECO47 available on request.

All machines have an auxiliary winding 'standard' with 300% short circuit capability.

ECO46: Refer to factory before ordering to assure winding is available at 600 Volts at the indicated rating.

These are 'special' machines.

Check factory for delivery lead times.

4 Pole | 220V - 230V - 240V

60 Hz | 1 Phase | 1 PF | AVR Controlled

Winding: Standard - Reconnected
RPM: 1800
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP3 1S4 C	12	M2K	5,3	5	4,8	4,4	3,8
ECP3 2S4 C	12	M2K	6,8	6,4	6,2	5,8	5
ECP3 1L4 C	12	M2K	9	8,5	8,2	7,5	6,6
ECP3 2L4 C	12	M2K	10,7	10	9,8	9	7,8
ECP3 3L4 C	12	M2K	11,5	10,8	10,5	9,6	8,4
ECP4 1M4 C	12	M2K	5,3	5	4,8	4,4	3,8
ECP4 2M4 C	12	M2K	6	5,7	5,5	5,1	4,4
ECP4 3M4 C	12	M2K	6,9	6,5	6,3	5,8	5
ECP4 4M4 C	12	M2K	8,5	8	7,8	7,2	6,2
ECP4 5M4 C	12	M2K	10,3	9,6	9,4	8,6	7,5
ECP4 1L4 C	12	M2K	13,1	12,3	12	11	9,6
ECP4 2L4 C	12	M2K	15,3	14,5	14	13	11,2
ECP28 1VS4 C	12	M2K	5,5	5,1	5	4,5	4
ECP28 2VS4 C	12	M2K	7,6	7,2	7	6,4	5,6
ECP28 1S4 C	12	M2K	9,3	8,7	8,5	7,8	6,8
ECP28 2S4 C	12	M2K	11,4	10,8	10,5	9,6	8,4
ECP28 3S4 C	12	M2K	13,1	12,3	12	11	9,6
ECP28 M4 C	12	M2K	15,3	14,5	14	13	11,2
ECP28 L4 C	12	M2K	18,5	17,6	17	15	13,6
ECP28 VL4 C	12	M2K	23	22	21	19,5	16,8
ECP30 1M4 C	12	M2K	15,3	14,5	14	13	11,2
ECP30 2M4 C	12	M2K	18,5	17,6	17	15	13,6
ECP30 3M4 C	12	M2K	23	22	21	19,5	16,8
ECP30 1L4 C	12	M2K	25,2	24	23	21,4	18,4
ECP30 2L4 C	12	M2K	27,4	26,2	25	23,2	20
ECP30 3L4 C	12	M2K	29,6	28,3	27	25,1	21,6
ECP32 1S4 C	12	M2K	26	25	24	23	19,2
ECP32 2S4 C	12	M2K	29	28	27	26	22
ECP32 1M4 C	12	M2K	33	32	30	29	24
ECP32 2M4 C	12	M2K	39	37,8	36	33	29
ECP32 1L4 C	12	M2K	49	47	45	42	36
ECP32 2L4 C	12	M2K	51	49	47	44	38

SERIES DELTA / ZIG-ZAG / 1PHASE DOUBLE DELTA

MECC ALTE INDUSTRIAL

10F2

4 Pole | 220V - 230V - 240V

60 Hz | 1 Phase | 1 PF | AVR Controlled

Winding: Standard - Reconnected
RPM: 1800
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP34 1S4 C	12	M2K	63	60	58	55	46
ECP34 2S4 C	12	M2K	66	63	61	56	49
ECP34 1M4 C	12	M2K	75	71	69	62	55
ECP34 2M4 C	12	M2K	80	75	73	66	58
ECP34 1L4 C	12	M2K	89	85	82	74	66
ECP34 2L4 C	12	M2K	97	91	89	81	71
EC038 1S4 C	12	M2K	95	88	86	78	69
EC038 2S4 C	12	M2K	97	91	88	80	70
EC038 1M4 C	12	M2K	118	114	110	100	88
EC038 2M4 C	12	M2K	130	124	120	108	96
EC038 1L4 C	12	M2K	148	141	135	123	108
EC038 2L4 C	12	M2K	170	160	155	140	124
EC038 VL4 C	12	M2K	174	164	159	144	127
EC040 1S4 C	12	M3K	210	206	195	179	155
EC040 2S4 C	12	M3K	236	230	219	203	175
EC040 3S4 C	12	M3K	300	283	275	245	220
EC040 1L4 C	12	M3K	313	305	290	264	232
EC040 2L4 C	12	M3K	330	315	305	275	244
EC040 3L4 C	12	M3K	350	340	330	307	264
EC040 VL4 C	12	M3K	430	410	400	375	320

SERIES DELTA / ZIG-ZAG / 1PH DOUBLE DELTA

PARALLEL DELTA

MECC ALTE INDUSTRIAL

2 OF 2

All machines have an auxiliary winding 'standard' with 300% short circuit capability.

The weights are the same as the 'standard' 3 Phase Models

Ratings with damper cage.

Consult Factory to choose for your applications.

4 Pole | 220V - 230V - 240V

60 Hz | 1 Phase | 0.8 PF | AVR Controlled

Winding: Standard - Reconnected
RPM: 1800
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP3 1S4 C	12	M2K	4,8	4,6	4,4	4	3,5
ECP3 2S4 C	12	M2K	6,2	5,9	5,7	5,3	4,6
ECP3 1L4 C	12	M2K	8,2	7,8	7,5	6,9	6
ECP3 2L4 C	12	M2K	9,5	8,9	8,7	8	7
ECP3 3L4 C	12	M2K	10,5	9,9	9,6	8,8	7,7
ECP4 1M4 C	12	M2K	4,8	4,6	4,4	4	3,5
ECP4 2M4 C	12	M2K	5,5	5,2	5	4,6	4
ECP4 3M4 C	12	M2K	6,3	6	5,8	5,3	4,6
ECP4 4M4 C	12	M2K	7,6	7,2	7	6,5	5,6
ECP4 5M4 C	12	M2K	9,2	8,6	8,4	7,7	6,7
ECP4 1L4 C	12	M2K	11,8	11,1	10,8	9,9	8,6
ECP4 2L4 C	12	M2K	13,7	13,1	12,6	11,7	10,1
ECP28 1VS4 C	12	M2K	4,9	4,6	4,5	4,1	3,6
ECP28 2VS4 C	12	M2K	6,9	6,5	6,3	5,8	5
ECP28 1S4 C	12	M2K	8,4	7,9	7,7	7,1	6,2
ECP28 2S4 C	12	M2K	10,4	9,8	9,5	8,7	7,6
ECP28 3S4 C	12	M2K	11,8	11,1	10,8	9,9	8,6
ECP28 M4 C	12	M2K	13,7	13,1	12,6	11,7	10,1
ECP28 L4 C	12	M2K	16,7	15,8	15,3	13,5	12,2
ECP28 VL4 C	12	M2K	20,6	19,8	18,9	17,6	15,1
ECP30 1M4 C	12	M2K	13,7	13,1	12,6	11,7	10,1
ECP30 2M4 C	12	M2K	16,7	15,8	15,3	13,5	12,2
ECP30 3M4 C	12	M2K	20,6	19,8	18,9	17,6	15,1
ECP30 1L4 C	12	M2K	22	21,1	20,2	18,8	16,2
ECP30 2L4 C	12	M2K	24	23,1	22	20,4	17,6
ECP30 3L4 C	12	M2K	25,6	24,6	23,5	21,8	18,8
ECP32 1S4 C	12	M2K	23,4	22,4	21,5	20,6	17,2
ECP32 2S4 C	12	M2K	26,7	25,4	24,5	23,6	19,6
ECP32 1M4 C	12	M2K	29,4	28,8	27	26,1	21,6
ECP32 2M4 C	12	M2K	34,9	33,6	32	29,3	25,6
ECP32 1L4 C	12	M2K	44,1	42,3	40,5	37,8	32,4
ECP32 2L4 C	12	M2K	46,9	44,8	43	40,3	34,4

SERIES DELTA / ZIG-ZAG / 1PHASE DOUBLE DELTA

MECC ALTE INDUSTRIAL

10F2

4 Pole | 220V - 230V - 240V

60 Hz | 1 Phase | 0.8 PF | AVR Controlled

Winding: Standard - Reconnected
RPM: 1800
Insulation: Class H



MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP34 1S4 C	12	M2K	57	54	52	49	42
ECP34 2S4 C	12	M2K	60	57	55	50	44
ECP34 1M4 C	12	M2K	68	64	62	56	50
ECP34 2M4 C	12	M2K	72	68	66	60	53
ECP34 1L4 C	12	M2K	81	77	74	67	59
ECP34 2L4 C	12	M2K	87	82	80	73	64
EC038 1S4 C	12	M2K	85	80	78	71	62
EC038 2S4 C	12	M2K	87	83	80	73	64
EC038 1M4 C	12	M2K	109	104	100	91	80
EC038 2M4 C	12	M2K	118	112	108	97	86
EC038 1L4 C	12	M2K	130	124	119	108	95
EC038 2L4 C	12	M2K	148	140	136	123	109
EC038 VL4 C	12	M2K	153	144	140	127	112
EC040 1S4 C	12	M3K	201	194	184	169	147
EC040 2S4 C	12	M3K	231	223	212	197	170
EC040 3S4 C	12	M3K	286	270	262	233	210
EC040 1L4 C	12	M3K	296	286	272	248	218
EC040 2L4 C	12	M3K	312	295	286	258	229
EC040 3L4 C	12	M3K	335	316	307	286	246
EC040 VL4 C	12	M3K	416	392	382	358	306

SERIES DELTA / ZIG-ZAG / 1PH DOUBLE DELTA

PARALLEL DELTA

MECC ALTE INDUSTRIAL

2 OF 2

All machines have an auxiliary winding 'standard' with 300% short circuit capability.

The weights are the same as the 'standard' 3 Phase Models

Ratings with damper cage.

Consult Factory to choose for your applications.

4 Pole | 240V

60 Hz | 1 Phase | 1 PF | AVR Controlled

Winding: Dedicated
RPM: 1800
Insulation: Class H



MECC ALTE INDUSTRIAL

MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP3 1S4 C	4	M2K	6,2	6,1	6	5,6	4,8
ECP3 2S4 C	4	M2K	7,8	7,7	7,5	7,1	6
ECP3 1L4 C	4	M2K	10,5	10,3	10	9,2	8
ECP3 2L4 C	4	M2K	12,5	12,4	12	11,1	9,6
ECP3 3L4 C	4	M2K	14,1	13,9	13,5	12,5	10,8
ECP4 1M4 C	4	M2K	6,5	6,1	6	5,5	4,8
ECP4 2M4 C	4	M2K	8,2	7,9	7,5	6,8	6
ECP4 3M4 C	4	M2K	9,3	8,9	8,5	7,7	6,9
ECP4 4M4 C	4	M2K	11,4	10,8	10,5	9,5	8,4
ECP4 5M4 C	4	M2K	13,6	12,8	12,5	11,6	10
ECP4 1L4 C	4	M2K	16,4	15,4	15	13,9	12
ECP4 2L4 C	4	M2K	18,5	17,3	17	15,9	13,6
ECP28 1VS4 C	4	M2K	6,5	6,1	6	5,5	4,8
ECP28 2VS4 C	4	M2K	9,3	8,7	8,5	7,7	6,8
ECP28 1S4 C	4	M2K	11,4	10,8	10,5	9,5	8,4
ECP28 2S4 C	4	M2K	13,6	12,8	12,5	11,6	10
ECP28 3S4 C	4	M2K	16,4	15,4	15	13,9	12
ECP28 M4 C	4	M2K	18,5	17,3	17	15,9	13,6
ECP28 L4 C	4	M2K	24	22,3	22	20,4	17,6
ECP28 VL4 C	4	M2K	27,3	25,7	25	22	20
ECP30 1M4 C	4	M2K	18,5	17,3	17	15,9	13,6
ECP30 2M4 C	4	M2K	24	22,3	22	20,4	17,6
ECP30 3M4 C	4	M2K	27,3	25,7	25	22	20
ECP30 1L4 C	4	M2K	33,6	32	31	29,7	25
ECP30 2L4 C	4	M2K	40,6	38	37	35,2	29,8
ECP30 3L4 C	4	M2K	42,6	40	39	37	31,3
ECP32 1S4 C	4	M2K	39	37	36	34,5	29
ECP32 2S4 C	4	M2K	45	42	41	39	33
ECP32 1M4 C	4	M2K	48	45	44	42	35
ECP32 2M4 C	4	M2K	52	50	48	45,5	38
ECP32 1L4 C	4	M2K	60	57	55	52	44
ECP32 2L4 C	4	M2K	63	60	58	55	46
ECP34 1S4 C	4	M2K	85	80	78	73	62
ECP34 2S4 C	4	M2K	92	87	84	76	67
ECP34 1M4 C	4	M2K	105	99	96	88	77
ECP34 2M4 C	4	M2K	107	101	98	90	78
ECP34 1L4 C	4	M2K	109	103	100	92	80
ECP34 2L4 C	4	M2K	122	115	112	102	90

All machines have an auxiliary winding 'standard' with 300% short circuit capability.

Consult Factory to choose for your application.

Ratings with damper cage (Except Series 3).

For different nominal voltages please consult Factory.

4 Pole | 240V

60 Hz | 1 Phase | 0.8 PF | AVR Controlled

Winding: Dedicated
RPM: 1800
Insulation: Class H



MECC ALTE INDUSTRIAL

MODEL	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
			Standby		Continuous		
			163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
ECP3 1S4 C	4	M2K	5,7	5,6	5,5	5,1	4,4
ECP3 2S4 C	4	M2K	7,2	6,7	6,5	6	5,2
ECP3 1L4 C	4	M2K	9,7	9,3	9	8,3	7,2
ECP3 2L4 C	4	M2K	11,6	11,2	10,8	10,1	8,6
ECP3 3L4 C	4	M2K	12,8	12,4	12	11,2	9,6
ECP4 1M4 C	4	M2K	6	5,6	5,5	5	4,4
ECP4 2M4 C	4	M2K	7,2	6,7	6,5	5,9	5,2
ECP4 3M4 C	4	M2K	8,1	7,6	7,4	6,7	5,9
ECP4 4M4 C	4	M2K	10,1	9,5	9,3	8,5	7,4
ECP4 5M4 C	4	M2K	12,3	11,6	11,3	10,9	9
ECP4 1L4 C	4	M2K	14,7	13,9	13,5	13	10,8
ECP4 2L4 C	4	M2K	17,1	16	15,7	14,4	12,6
ECP28 1VS4 C	4	M2K	5,6	5,2	5,1	4,6	4,1
ECP28 2VS4 C	4	M2K	8,1	7,6	7,4	6,7	5,9
ECP28 1S4 C	4	M2K	10,1	9,5	9,3	8,5	7,4
ECP28 2S4 C	4	M2K	12,3	11,6	11,3	10,9	9
ECP28 3S4 C	4	M2K	14,7	13,9	13,5	13	10,8
ECP28 M4 C	4	M2K	17,1	16	15,7	14,4	12,6
ECP28 L4 C	4	M2K	20,7	19,3	19	17,4	15,2
ECP28 VL4 C	4	M2K	24	22,6	22	20	17,6
ECP30 1M4 C	4	M2K	17,1	16	15,7	14,4	12,6
ECP30 2M4 C	4	M2K	20,7	19,3	19	17,4	15,2
ECP30 3M4 C	4	M2K	24	22,6	22	20	17,6
ECP30 1L4 C	4	M2K	28	26,8	26	24,4	20,8
ECP30 2L4 C	4	M2K	34,5	32,5	30	28,9	24
ECP30 3L4 C	4	M2K	36,2	34,0	31,5	30,3	25,2
ECP32 1S4 C	4	M2K	30,5	29	28	26	22
ECP32 2S4 C	4	M2K	38,2	36	35	32	28
ECP32 1M4 C	4	M2K	41,4	39	38	34	30
ECP32 2M4 C	4	M2K	45,8	43	42	36	34
ECP32 1L4 C	4	M2K	54,5	52	50	47	40
ECP32 2L4 C	4	M2K	58,9	55	54	51	43
ECP34 1S4 C	4	M2K	76	72	70	65	56
ECP34 2S4 C	4	M2K	88	84	81	73	65
ECP34 1M4 C	4	M2K	94	89	86	78	69
ECP34 2M4 C	4	M2K	96	91	88	80	70
ECP34 1L4 C	4	M2K	98	93	90	83	72
ECP34 2L4 C	4	M2K	110	104	101	92	81

All machines have an auxiliary winding 'standard' with 300% short circuit capability.

Consult Factory to choose for your application.

Ratings with damper cage (Except Series 3).

For different nominal voltages please consult Factory.

LT3N

2/4 Pole | 50/60Hz | 1Phase | 1 PF

Winding: Standard - 4 Lead
RPM: 1500/1800 - 3000/3600
Insulation: Class H



MECC ALTE LIGHTNING

4 Pole

MODEL	WEIGHT (kg)	LENGTH (mm)	kVA @ 230/115V, 50Hz, 1 PF				kVA @ 240/120V, 60Hz, 1 PF			
			125/40 [H]	105/40 [F]	80/40 [B]	Eff %	125/40 [H]	105/40 [F]	80/40 [B]	Eff %
LT3N-75/4	32	248	3,5	3,2	2,8	75,8	4,5	4,1	3,6	76,2
LT3N-100/4	38	273	4,5	4,1	3,6	76,5	6	5,5	4,8	76,9
LT3N-110/4	40	283	5	4,6	4	76,8	6,5	6	5,2	77,2
LT3N-130/4	46	303	6	5,5	4,8	77,5	7,5	6,9	6	77,9
LT3N-160/4	55	333	8	7,3	6,4	78	10	9,2	8	78,7

4 Pole - Double Frequency *

MODEL	WEIGHT (kg)	LENGTH (mm)	kVA @ 230/115V, 50Hz, 1 PF				kVA @ 240/120V, 60Hz, 1 PF			
			125/40 [H]	105/40 [F]	80/40 [B]	Eff %	125/40 [H]	105/40 [F]	80/40 [B]	Eff %
LT3N-75/4 DF	32	248	3,5	3,2	2,8	75,8	3,5	3,2	2,8	76,2
LT3N-100/4 DF	38	273	4,5	4,1	3,6	76,5	4,5	4,1	3,6	76,9
LT3N-110/4 DF	40	283	5	4,6	4	76,8	5	4,6	4	77,2
LT3N-130/4 DF	46	303	6	5,5	4,8	77,5	6	5,5	4,8	77,9
LT3N-160/4 DF	55	333	8	7,3	6,4	78	8	7,3	6,4	78,7

2 Pole

MODEL	WEIGHT (kg)	LENGTH (mm)	kVA @ 230/115V, 50Hz, 1 PF				kVA @ 240/120V, 60Hz, 1 PF			
			125/40 [H]	105/40 [F]	80/40 [B]	Eff %	125/40 [H]	105/40 [F]	80/40 [B]	Eff %
LT3N-100/2	40	273	7	6,4	5,6	79,8	8,4	7,7	6,7	80,3
LT3N-130/2	49	303	10	9,2	8	80,2	12	11	9,6	80,7

Brushless capacitor excited machines specifically for Metal Halide light tower lamps.

For custom voltages or non-standard lamp striking voltages, please refer to Factory.

*DF model has the ability to operate at both 50Hz and 60Hz by changing the connection.

NPE

2/4 Pole | 50/60Hz | 3Phase

Winding: Standard
 RPM: 1500/1800 - 3000/3600
 Insulation: Class H
 Regulator: M2K



MECC ALTE SPACE SAVER

3Phase - 50Hz

			kVA 115/200/230/400V 50 Hz, 0.8 PF				
			Standby		Continuous		
MODEL	WEIGHT (kg)	LEADS	163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
NPE32 1M2 C	90	12	14,9	13,7	13,5	12,3	10,8
NPE32 2M2 C	102	12	23,1	21,3	21	19	16,8
NPE32 L2 C	120	12	28,6	26,4	26	23,8	20,8
NPE32 VL2 C	134	12	35,2	32,3	32	28,8	25,6
NPE32 1S4 C	77	12	8,8	8,3	8	7,8	6,4
NPE32 2S4 C	83	12	12,1	11,6	11	10	8,8
NPE32 1M4 C	98	12	17,6	16,7	16	14,8	12,8
NPE32 2M4 C	109	12	22	20,9	20	18,2	16
NPE32 L4 C	120	12	27,5	26,2	25	23	20
NPE32 VL4 C	145	12	38,5	36,4	35	31,8	28
NPE34 1S4 C	210	12	47	45,7	43	38,8	34,4
NPE34 2S4 C	230	12	55	52,5	50	45	40
NPE34 1M4 C	250	12	65,5	63,5	60	54	48
NPE34 2M4 C	271	12	76,5	74	70	63	56
NPE34 1L4 C	315	12	98,5	95	90	81,5	72

3Phase - 60Hz

			kVA 138/240/277/480V 60 Hz, 0.8 PF				
			Standby		Continuous		
MODEL	WEIGHT (kg)	LEADS	163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
NPE32 1M2 C	90	12	18,2	16,8	16,5	15	13,2
NPE32 2M2 C	102	12	28,1	25,7	25,5	23	20,4
NPE32 L2 C	120	12	34,7	32	31,5	29	25,2
NPE32 VL2 C	134	12	42,2	38,8	38,4	35	30,7
NPE32 1S4 C	77	12	11	10,6	10	9,3	8
NPE32 2S4 C	83	12	14,3	13,8	13	11,6	10,4
NPE32 1M4 C	98	12	20,9	19,9	19	17,2	15,2
NPE32 2M4 C	109	12	26,4	24,9	24	21,7	19,2
NPE32 L4 C	120	12	34,1	32,5	31	28,5	24,8
NPE32 VL4 C	145	12	46,2	43,7	42	38,3	33,6
NPE34 1S4 C	210	12	56,5	54,5	51,5	46,7	41,3
NPE34 2S4 C	230	12	65,5	63	60	54,5	48
NPE34 1M4 C	250	12	79	76	72	65	57,5
NPE34 2M4 C	271	12	92	89	84	76	67
NPE34 1L4 C	315	12	114	110	105	95	84

Space Efficient - designed for length reduction.

For other combinations of voltages/frequencies please consult our online DDS system.

NPE

2/4 Pole | 50/60Hz | 1Phase

Winding: Standard
 RPM: 1500/1800 - 3000/3600
 Insulation: Class H
 Regulator: M2K



MECC ALTE SPACE SAVER

1Phase (Re-connected) - 50Hz

			kVA 220/230/240V 50 Hz, 1 PF				
			Standby		Continuous		
MODEL	WEIGHT (kg)	LEADS	163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
NPE32 1M2 C	90	12	9,8	10	9	8,2	7,2
NPE32 2M2 C	102	12	15,3	15	14	12,7	11,2
NPE32 L2 C	120	12	18,9	18,1	17,3	15,8	13,8
NPE32 VL2 C	134	12	23,2	22,4	21,3	19,2	17
NPE32 1S4 C	77	12	5,5	5,3	5	4,5	4
NPE32 2S4 C	83	12	7,6	7,5	7	6,3	5,6
NPE32 1M4 C	98	12	12	11,5	11	9,8	8,8
NPE32 2M4 C	109	12	14,7	14,2	13,5	12,2	10,8
NPE32 L4 C	120	12	18	17,2	16,5	14,9	13,2
NPE32 VL4 C	145	12	24	22,8	22	19,8	17,6
NPE34 1S4 C	210	12	27,3	25,4	25	23,3	20
NPE34 2S4 C	230	12	31,6	30	29	26,2	23,2
NPE34 1M4 C	250	12	37	35	34	31	27,2
NPE34 2M4 C	271	12	44,7	42	41	37,7	32,8
NPE34 1L4 C	315	12	51	48	47	42	37,6

1Phase (Re-connected) - 60Hz

			kVA 220/230/240V 60 Hz, 1 PF				
			Standby		Continuous		
MODEL	WEIGHT (kg)	LEADS	163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
NPE32 1M2 C	90	12	12	12	11	10	8,8
NPE32 2M2 C	102	12	18,3	17,6	16,8	15,2	13,4
NPE32 L2 C	120	12	22,9	22	21	19,3	16,8
NPE32 VL2 C	134	12	27,8	26,9	25,5	23,2	20,4
NPE32 1S4 C	77	12	7,1	6,9	6,5	5,9	5,2
NPE32 2S4 C	83	12	8,7	8,4	8	7,2	6,4
NPE32 1M4 C	98	12	14,2	13,6	13	11,7	10,4
NPE32 2M4 C	109	12	18,5	17,9	17	15,3	13,6
NPE32 L4 C	120	12	21,8	20,8	20	18	16
NPE32 VL4 C	145	12	27,3	26	25	22,5	20
NPE34 1S4 C	210	12	28,3	27	26	24,7	20,8
NPE34 2S4 C	230	12	32,7	31	30	27,5	24
NPE34 1M4 C	250	12	38,2	36	35	31,4	28
NPE34 2M4 C	271	12	46,9	44,2	43	38,9	34,4
NPE34 1L4 C	315	12	53,5	51	49	44,2	39,2

Space Efficient - designed for length reduction.

For other combinations of voltages/frequencies please consult our online DDS system.

NPE

2/4 Pole | 50/60Hz | 1Phase

Winding: Dedicated
RPM: 1500/1800 - 3000/3600
Insulation: Class H
Regulator: M2K



MECC ALTE SPACE SAVER

1Phase (Dedicated Winding) - 50 Hz

			kVA 115/230V 50 Hz, 1 PF				
			Standby		Continuous		
MODEL	WEIGHT (kg)	LEADS	163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
NPE32 1M2 C	90	4	13,1	13	12	11	9,6
NPE32 2M2 C	102	4	16,4	15,7	15	13,6	12
NPE32 L2 C	120	4	22,9	22,2	21	19	16,8
NPE32 VL2 C	134	4	27,3	26,3	25	23	20
NPE32 1S4 C	77	4	6,5	6,3	6	5,8	4,8
NPE32 2S4 C	83	4	9,8	9,4	9	8,6	7,2
NPE32 1M4 C	98	4	14,7	14,3	13,5	13	10,8
NPE32 2M4 C	109	4	18,5	17,9	17	16,4	13,6
NPE32 L4 C	120	4	21,8	21,1	20	18,9	16
NPE32 VL4 C	145	4	29,4	28,8	27	25,2	21,6
NPE34 1S4 C	210	4	33	31	30	28	24
NPE34 2S4 C	230	4	38	37	35	32	28
NPE34 1M4 C	250	4	44	42	40	36	32
NPE34 2M4 C	271	4	50	48	46	42	37
NPE34 1L4 C	315	4	65	62	60	55	48

1Phase (Dedicated Winding) - 60 Hz

			kVA 120/240V 60 Hz, 1 PF				
			Standby		Continuous		
MODEL	WEIGHT (kg)	LEADS	163/27	150/40	125/40 [H]	105/40 [F]	80/40 [B]
NPE32 1M2 C	90	4	15,7	15	14,4	13,2	11,5
NPE32 2M2 C	102	4	19,6	18,8	18	16,3	14,4
NPE32 L2 C	120	4	27,5	26,4	25,2	23	20,2
NPE32 VL2 C	134	4	32,7	31,7	30	27,5	24
NPE32 1S4 C	77	4	8,7	8,3	8	7,6	6,4
NPE32 2S4 C	83	4	12	11,5	11	10,5	8,8
NPE32 1M4 C	98	4	18	17,3	16,5	15,9	13,2
NPE32 2M4 C	109	4	22,9	22,2	21	19,8	16,8
NPE32 L4 C	120	4	27,3	26,1	25	23,9	20
NPE32 VL4 C	145	4	35,4	34,3	32,5	30,7	26
NPE34 1S4 C	210	4	39	37	36	34	29
NPE34 2S4 C	230	4	46	44	42	38	34
NPE34 1M4 C	250	4	52	50	48	44	38
NPE34 2M4 C	271	4	61	58	56	51	45
NPE34 1L4 C	315	4	78	74	72	66	58

Space Efficient - designed for length reduction.

For other combinations of voltages/frequencies please consult our online DDS system.

Dedicated single-phase dual frequency is available upon request.

Totally Enclosed

4 Pole | 50/60Hz | 3Phase | 0.8 PF

Winding: Various - 12 Lead

RPM: 1500/1800

Insulation: Class H



Railroad Duty Alternators

Mecc Alte has been building Railroad Duty alternators for over two decades. Designed and manufactured to meet harsh environmental demands for line haul locomotives and switching applications.

Our rugged insulation system, with our unique, overcoat of black severe environment protection, provides unparalleled mechanical strength and superior protection against airborne rail dust, oil and grease.

Our TE (Totally Enclosed), pre-engineered generators (some are listed below) are becoming the standard for other harsh environmental applications, which include gantry cranes for Asian Port Authorities and off-shore oil platforms on two continents.

Typical Mechanical and Electrical Specification

Insulation System and mechanical reinforcement:

- ▶ Stator treatments can include additional mechanical bracing, additional lacing on the end turns; VPI treatment, black severe environment protection on the windings.
- ▶ Rotor treatments can include VPI application(s), closer machining tolerances on the rotor shaft with shrink collars to prevent core pack movement.
- ▶ Special Lead termination and configurations (long leads, bus bars, etc.) as well as special cable glands, cooling fans, adaptors and mounting reinforcement.

				kVA @ 50Hz Temp. Rise/Amb. C/ 0.8 PF			
				115 / 200 / 230 / 400 V			
MODEL	WEIGHT (kg)	LEADS	AVR	Continuous 125/40 [H]	Continuous 105/40 [F]	Continuous 80/40 [B]	Continuous 95/50
TE34-1S/4	310	12	UVR6	50	45	40	42
TE34-2S/4	376	12	UVR6	60	54	48	50
TE34-1L/4	396	12	UVR6	70	63	56	58
TE34-2L/4	430	12	UVR6	80	72	64	67

				kVA @ 60Hz Temp. Rise/Amb. C/ 0.8 PF			
				138 / 240 / 276 / 480 V			
MODEL	WEIGHT (kg)	LEADS	AVR	Continuous 125/40 [H]	Continuous 105/40 [F]	Continuous 80/40 [B]	Continuous 95/50
TE34-1S/4	310	12	UVR6	60	54	48	50
TE34-2S/4	376	12	UVR6	72	65	57.5	60
TE34-1L/4	396	12	UVR6	84	76	67	70
TE34-2L/4	430	12	UVR6	96	87	77	80

Consult Factory for pricing.

Above generators are built to IP55 standards.

Custom engineered models are available to fit special applications. Consult Factory.



INGRESS PROTECTION


HC Alternator

14/20/24/26 Pole | 400Hz | 3Phase | 0.8 PF

Winding: Standard - 115/200V | 208V - 6/12 Lead

RPM: 3428/2400/2000/1848

Insulation: Class H



Multi-Pole | 400Hz

MODEL	WEIGHT (kg)	LEADS	AVR	RPM	kVA @ Temp. Rise / Ambient C	
					Continuous 125/40 [H]	Continuous 105/40 [F]
HCP3 1S14	49	6	UVR6/H	3428	5.5	5
HCP3 2S14	54	6	UVR6/H	3428	7	6.5
HCP3 3S14	61	6	UVR6/H	3428	9	8.5
HCP3 2L14	72	6	UVR6/H	3428	11	10
HCP3 3L14	80	6	UVR6/H	3428	13	12
HCP32 1S20 A**	187	12	UVR6/H	2400	45	40
HCP32 2S20 A**	220	12	UVR6/H	2400	50	45
HCP32 2L20 A**	275	12	UVR6/H	2400	60	55
HCP32 3L20 A**	300	12	UVR6/H	2400	70	65
HCP34 1S20 A**	318	12	UVR6/H	2400	75	70
HCP34 2S20 A**	345	12	UVR6/H	2400	95	85
HCP34 3S20 A**	380	12	UVR6/H	2400	125	115
HCP34 1L20 A**	430	12	UVR6/H	2400	150	135
HCP34 1S24 A*	346	12	UVR6/H	2000	60	55
HCP34 2S24 A*	420	12	UVR6/H	2000	90	80
HCP34 2L24 A*	502	12	UVR6/H	2000	125	110
HCO38 2S26 A*	540	6	UVR6/H	1848	90	85
HCO38 3S26 A*	629	6	UVR6/H	1848	120	110
HCO38 1L26 A*	790	6	UVR6/H	1848	150	140
HCO38 2L26 A*	885	6	UVR6/H	1848	180	165

*According ISO 6858 - EN2282 - Mil Stnd 704F

** Mil Stnd 704F available on request.

All machines have an auxiliary winding 'standard' with 300% short circuit capability.

UVR6/1-H400B AVR has under frequency, over voltage protection, 3ph reference; regulation is +/- 1%.

Line Drop Compensator is also available as an option.

Custom projects available for dedicated power nodes.

The following accessories are available upon request for an additional charge:

- ▶ Space Heaters
- ▶ Temperature detectors (thermistors or PT100) for stator windings and bearings.
- ▶ IP45 rated enclosure.
- ▶ Remote voltage control.

2/3 pitch windings with skewed slots for maximum reduction of harmonic content.

TOTAL+ treatment standard from HCP32 up to HCO38.

4 layers of polyester in addition to a clear varnish and EG43 overcoat on the main and exciter windings is standard on 400 Hz machines.

2 Pole Industrial

2 Pole | 50 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 115 / 200 / 230 / 400 Volts
Winding: Standard 12 Leads
RPM: 3000
Insulation: Class H



MODEL	WEIGHT (kg)	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
				Standby 163/27	Standby 150/40	Continuous 125/40 [H]	Continuous 105/40 [F]	Continuous 105/40 [B]
ECP3 1S2	56	12	M2K	8,6	8,3	8	7,2	6,4
ECP3 2S2	62	12	M2K	11,2	10,4	10	9	8
ECP3 3S2	68	12	M2K	14	13	12,5	11	10
ECP3 1L2	80	12	M2K	17,2	16,6	16	14,5	12,8
ECP3 2L2	88	12	M2K	21,5	20,6	20	18	16
ECP28 M2 C	126	12	M2K	24	23	22	20	17,6
ECP28 1L2 C	136	12	M2K	29	28	27	25	21,6
ECP28 2L2 C	141	12	M2K	33,5	32,4	31,5	30	25,2
ECP28 VL2 C	156	12	M2K	43	41,3	40	37	32
ECP32 1S2 C	173	12	M2K	48	46	44	40	35,2
ECP32 2S2 C	199	12	M2K	54	52	50	45	40
ECP32 M2 C	212	12	M2K	71	69	66	60	52,8
ECP32 L2 C	231	12	M2K	89	85,5	82	75	65,6
ECP34 1S2 A	344	12	M2K	110	105	100	90	80
ECP34 2S2 A	413	12	M2K	135	130	125	113	100
ECP34 1L2 A	456	12	M2K	168	162	156	140	124
ECP34 2L2 A	492	12	M2K	184	177	170	154	136
EC038 1S2 A	510	12	M2K	*	*	158	142	*
EC038 1L2 A	676	12	M2K	*	*	208	188	*
EC038 2L2 A	790	12	M2K	*	*	300	270	*

Voltage: 110 / 190 / 220 / 380 Volts
Winding: Standard 12 Leads
RPM: 3000
Insulation: Class H

MODEL	WEIGHT (kg)	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
				Standby 163/27	Standby 150/40	Continuous 125/40 [H]	Continuous 105/40 [F]	Continuous 105/40 [B]
ECP3 1S2	56	12	M2K	8,6	8,3	8	7,2	6,4
ECP3 2S2	62	12	M2K	11,2	10,4	10	9	8
ECP3 3S2	68	12	M2K	14	13	12,5	11	10
ECP3 1L2	80	12	M2K	17,2	16,6	16	14,5	12,8
ECP3 2L2	88	12	M2K	21,5	20,6	20	18	16
ECP28 M2 C	126	12	M2K	24	23	22	20	17,6
ECP28 1L2 C	136	12	M2K	29	28	27	25	21,6
ECP28 2L2 C	141	12	M2K	33,5	32,4	31,5	30	25,2
ECP28 VL2 C	156	12	M2K	43	41,3	40	37	32
ECP32 1S2 C	173	12	M2K	48	46	44	40	35,2
ECP32 2S2 C	199	12	M2K	54	52	50	45	40
ECP32 M2 C	212	12	M2K	71	69	66	60	52,8
ECP32 L2 C	231	12	M2K	89	85,5	82	75	65,6
ECP34 1S2 A	344	12	M2K	110	105	100	90	80
ECP34 2S2 A	413	12	M2K	135	130	125	113	100
ECP34 1L2 A	456	12	M2K	168	162	156	140	124
ECP34 2L2 A	492	12	M2K	184	177	170	154	136

For different nominal voltages and not expressed ratings, please consult Factory.

2 Pole Industrial

2 Pole | 50 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 120 / 208 / 240 / 415 Volts
Winding: Standard 12 Leads
RPM: 3000
Insulation: Class H



MODEL	WEIGHT (kg)	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
				Standby 163/27	Standby 150/40	Continuous 125/40 [H]	Continuous 105/40 [F]	Continuous 105/40 [B]
ECP3 1S2	56	12	M2K	8,6	8,3	8	7,2	6,4
ECP3 2S2	62	12	M2K	11,2	10,4	10	9	8
ECP3 3S2	68	12	M2K	14	13	12,5	11	10
ECP3 1L2	80	12	M2K	17,2	16,6	16	14,5	12,8
ECP3 2L2	88	12	M2K	21,5	20,6	20	18	16
ECP28 M2 C	126	12	M2K	24	23	22	20	17,6
ECP28 1L2 C	136	12	M2K	27	26	25	23	20
ECP28 2L2 C	141	12	M2K	33,5	32,4	31,5	30	25,2
ECP28 VL2 C	156	12	M2K	43	41,3	40	37	32
ECP32 1S2 C	173	12	M2K	48	46	44	40	35,2
ECP32 2S2 C	199	12	M2K	54	52	50	45	40
ECP32 M2 C	212	12	M2K	70	67,5	65	59	52
ECP32 L2 C	231	12	M2K	87	83,5	80	73	64
ECP34 1S2 A	344	12	M2K	110	105	100	90	80
ECP34 2S2 A	413	12	M2K	135	130	125	113	100
ECP34 1L2 A	456	12	M2K	168	162	156	140	124
ECP34 2L2 A	492	12	M2K	184	177	170	154	136

Voltage: 127 / 220 / 254 / 440 Volts
Winding: Standard 12 Leads
RPM: 3000
Insulation: Class H

MODEL	WEIGHT (kg)	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
				Standby 163/27	Standby 150/40	Continuous 125/40 [H]	Continuous 105/40 [F]	Continuous 105/40 [B]
ECP3 1S2	56	12	M2K	7,3	7	6,8	6	5,4
ECP3 2S2	62	12	M2K	9,4	8,8	8,5	7,5	6,8
ECP3 3S2	68	12	M2K	11,6	10,9	10,5	9	8,4
ECP3 1L2	80	12	M2K	14	13,4	13	11,5	10,4
ECP3 2L2	88	12	M2K	17,5	16,5	16	14,3	12,8
ECP28 M2 C	126	12	M2K	20,7	20	19	17,3	15,2
ECP28 1L2 C	136	12	M2K	24,7	24	23	21	18,4
ECP28 2L2 C	141	12	M2K	28,7	27,8	27	24,5	21,6
ECP28 VL2 C	156	12	M2K	36,6	35	34	31	27,2
ECP32 1S2 C	173	12	M2K	41,5	39,7	38	34,5	30,4
ECP32 2S2 C	199	12	M2K	46	44,2	42,5	38,5	34
ECP32 M2 C	212	12	M2K	59	57,5	55	50	44
ECP32 L2 C	231	12	M2K	73	70	67	61	53,5
ECP34 1S2 A	344	12	M2K	93,5	90	85	75	68
ECP34 2S2 A	413	12	M2K	118	114	110	100	88
ECP34 1L2 A	456	12	M2K	140	135	130	115	104
ECP34 2L2 A	492	12	M2K	162	156	150	135	120

For different nominal voltages and not expressed ratings, please consult Factory.

2 Pole Industrial

2 Pole | 60 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 138 / 240 / 277 / 480 Volts
Winding: Standard 12 Leads
RPM: 3600
Insulation: Class H



MODEL	WEIGHT (kg)	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
				Standby 163/27	Standby 150/40	Continuous 125/40 [H]	Continuous 105/40 [F]	Continuous 105/40 [B]
ECP3 1S2	56	12	M2K	10,4	10	9,6	8,6	7,7
ECP3 2S2	62	12	M2K	13,5	12,5	12	10,8	9,6
ECP3 3S2	68	12	M2K	16,9	15,6	15	13	12
ECP3 1L2	80	12	M2K	20,8	20	19,2	17	15,4
ECP3 2L2	88	12	M2K	26	24,7	24	21,5	19,2
ECP28 M2 C	126	12	M2K	29	27,5	26,5	24	21,2
ECP28 1L2 C	136	12	M2K	35	33,5	32,5	30	26
ECP28 2L2 C	141	12	M2K	40	39	38	36	30,4
ECP28 VL2 C	156	12	M2K	51,5	49,6	48	44	38,4
ECP32 1S2 C	173	12	M2K	58	55,5	53	48	42,4
ECP32 2S2 C	199	12	M2K	65	63	60	54	48
ECP32 M2 C	212	12	M2K	85	83	79,5	72	63,6
ECP32 L2 C	231	12	M2K	107	103	98,5	90	78,8
ECP34 1S2 A	344	12	M2K	132	127	120	108	96
ECP34 2S2 A	413	12	M2K	162	156	150	135	120
ECP34 1L2 A	456	12	M2K	202	195	187	169	149
ECP34 2L2 A	492	12	M2K	220	213	208	188	166
ECO38 1S2 A	510	12	M2K	*	*	188	169	*
ECO38 1L2 A	676	12	M2K	*	*	250	225	*
ECO38 2L2 A	790	12	M2K	*	*	360	324	*

Voltage: 133 / 230 / 266 / 460 Volts
Winding: Standard 12 Leads
RPM: 3600
Insulation: Class H

MODEL	WEIGHT (kg)	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
				Standby 163/27	Standby 150/40	Continuous 125/40 [H]	Continuous 105/40 [F]	Continuous 105/40 [B]
ECP3 1S2	56	12	M2K	10,4	10	9,6	8,6	7,7
ECP3 2S2	62	12	M2K	13,5	12,5	12	10,8	9,6
ECP3 3S2	68	12	M2K	16,9	15,6	15	13	12
ECP3 1L2	80	12	M2K	20,8	20	19,2	17	15,4
ECP3 2L2	88	12	M2K	26	24,7	24	21,5	19,2
ECP28 M2 C	126	12	M2K	29	27,5	26,5	24	21,2
ECP28 1L2 C	136	12	M2K	35	33,5	32,5	30	26
ECP28 2L2 C	141	12	M2K	40	39	38	36	30,4
ECP28 VL2 C	156	12	M2K	51,5	49,6	48	44	38,4
ECP32 1S2 C	173	12	M2K	58	55,5	53	48	42,4
ECP32 2S2 C	199	12	M2K	65	63	60	54	48
ECP32 M2 C	212	12	M2K	85	83	79,5	72	63,6
ECP32 L2 C	231	12	M2K	107	103	98,5	90	78,8
ECP34 1S2 A	344	12	M2K	132	127	120	108	96
ECP34 2S2 A	413	12	M2K	162	156	150	135	120
ECP34 1L2 A	456	12	M2K	202	195	187	169	149
ECP34 2L2 A	492	12	M2K	220	213	208	188	166

For different nominal voltages and not expressed ratings, please consult Factory.

2 Pole Industrial

2 Pole | 60 Hz | 3 Phase | 0.8 PF | AVR Controlled

Voltage: 127 / 220 / 254 / 440 Volts
Winding: Standard 12 Leads
RPM: 3600
Insulation: Class H



MECC ALTE INDUSTRIAL

MODEL	WEIGHT (kg)	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
				Standby 163/27	Standby 150/40	Continuous 125/40 [H]	Continuous 105/40 [F]	Continuous 105/40 [B]
ECP3 1S2	56	12	M2K	10,4	10	9,6	8,6	7,7
ECP3 2S2	62	12	M2K	13,5	12,5	12	10,8	9,6
ECP3 3S2	68	12	M2K	16,9	15,6	15	13	12
ECP3 1L2	80	12	M2K	20,8	20	19,2	17	15,4
ECP3 2L2	88	12	M2K	26	24,7	24	21,5	19,2
ECP28 M2 C	126	12	M2K	27,5	26	25	23	20
ECP28 1L2 C	136	12	M2K	33,4	32	31	28,5	25
ECP28 2L2 C	141	12	M2K	38	37	36	34	28,8
ECP28 VL2 C	156	12	M2K	48,3	46,5	45	41,5	36
ECP32 1S2 C	173	12	M2K	56	53,5	51	46	40,8
ECP32 2S2 C	199	12	M2K	62,8	60,4	58	52	46,4
ECP32 M2 C	212	12	M2K	80,2	78,3	75	68	60
ECP32 L2 C	231	12	M2K	101	97	93	85	74,4
ECP34 1S2 A	344	12	M2K	132	127	120	108	96
ECP34 2S2 A	413	12	M2K	162	156	150	135	120
ECP34 1L2 A	456	12	M2K	187	181	174	156	139
ECP34 2L2 A	492	12	M2K	207	200	196	173	156

Voltage: 120 / 208 / 240 / 415 Volts
Winding: Standard 12 Leads
RPM: 3600
Insulation: Class H

MODEL	WEIGHT (kg)	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
				Standby 163/27	Standby 150/40	Continuous 125/40 [H]	Continuous 105/40 [F]	Continuous 105/40 [B]
ECP3 1S2	56	12	M2K	9,2	8,8	8,5	7	6,8
ECP3 2S2	62	12	M2K	11,8	10,9	10,5	9	8,4
ECP3 3S2	68	12	M2K	14,6	13,5	13	10,5	10,4
ECP3 1L2	80	12	M2K	18,4	17,6	17	14	13,6
ECP3 2L2	88	12	M2K	23	21,6	21	18	16,8
ECP28 M2 C	126	12	M2K	24,2	22,8	22	20	17,6
ECP28 1L2 C	136	12	M2K	29	27,8	27	24,5	21,6
ECP28 2L2 C	141	12	M2K	33,7	32,8	32	30	25,6
ECP28 VL2 C	156	12	M2K	43	41,3	40	37,5	32
ECP32 1S2 C	173	12	M2K	50,5	48,2	46	41,5	36,8
ECP32 2S2 C	199	12	M2K	57	54,5	52	47,5	41,6
ECP32 M2 C	212	12	M2K	75	71	68	61,5	54,5
ECP32 L2 C	231	12	M2K	92,5	88	84	76	67
ECP34 1S2 A	344	12	M2K	115	111	105	95	84
ECP34 2S2 A	413	12	M2K	140	135	130	120	104
ECP34 1L2 A	456	12	M2K	172	166	160	145	128
ECP34 2L2 A	492	12	M2K	185	179	175	160	140
ECO38 1S2 A	510	12	M2K	*	*	163	150	*
ECO38 1L2 A	676	12	M2K	*	*	215	197	*
ECO38 2L2 A	790	12	M2K	*	*	315	288	*

For different nominal voltages and not expressed ratings, please consult Factory.

2 Pole Industrial

50/60 Hz | 1 Phase | 1 PF | AVR Controlled

Voltage: 220/230/240 Volts
Winding: Standard 12 Leads - Reconnected
RPM: 3000
Insulation: Class H



MODEL	WEIGHT (kg)	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
				Standby 163/27	Standby 150/40	Continuous 125/40 [H]	Continuous 105/40 [F]	Continuous 105/40 [B]
ECP3 1S2	56	12	M2K	5,9	5,7	5,5	5	4,4
ECP3 2S2	62	12	M2K	7,8	7,3	7	6,3	5,6
ECP3 3S2	68	12	M2K	9	8,3	8	7,2	6,4
ECP3 1L2	80	12	M2K	11,3	10,9	10,5	9,6	8,4
ECP3 2L2	88	12	M2K	13,5	12,8	12,5	11,4	10
ECP28 M2 C	126	12	M2K	15,8	15	14,5	13	11,6
ECP28 1L2 C	136	12	M2K	18,5	17,6	17	15	13,6
ECP28 2L2 C	141	12	M2K	21,8	20,5	20	18	16
ECP28 VL2 C	156	12	M2K	26,2	24,6	24	22	19,2
ECP32 1S2 C	173	12	M2K	31,6	30	29	26	22,2
ECP32 2S2 C	199	12	M2K	36	35	33	29	26,4
ECP32 M2 C	212	12	M2K	47	44	43	39	34,4
ECP32 L2 C	231	12	M2K	59	55,2	54	49	43,2
ECP34 1S2 A	344	12	M2K	73	69	67	60	53,5
ECP34 2S2 A	413	12	M2K	91	85	83	75	66,5
ECP34 1L2 A	456	12	M2K	113	106	104	93	83
ECP34 2L2 A	492	12	M2K	123	116	113	103	90,5

Voltage: 220/230/240 Volts
Winding: Standard 12 Leads - Reconnected
RPM: 3600
Insulation: Class H

MODEL	WEIGHT (kg)	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
				Standby 163/27	Standby 150/40	Continuous 125/40 [H]	Continuous 105/40 [F]	Continuous 105/40 [B]
ECP3 1S2	56	12	M2K	6,2	6	5,8	5,2	4,6
ECP3 2S2	62	12	M2K	8,3	7,7	7,4	7,5	6
ECP3 3S2	68	12	M2K	9,4	8,7	8,4	7,6	6,7
ECP3 1L2	80	12	M2K	11,8	11,4	11	10	8,8
ECP3 2L2	88	12	M2K	13,5	13,4	13	11,6	10,4
ECP28 M2 C	126	12	M2K	16,4	15,4	15	13	12
ECP28 1L2 C	136	12	M2K	19,6	18,6	18	16	14,4
ECP28 2L2 C	141	12	M2K	23	21,7	21	19	16,8
ECP28 VL2 C	156	12	M2K	27,3	26,2	25	23	20
ECP32 1S2 C	173	12	M2K	31,6	30	29	26	22,2
ECP32 2S2 C	199	12	M2K	36	35	33	29,0	26,4
ECP32 M2 C	212	12	M2K	47	44	43	39	34,4
ECP32 L2 C	231	12	M2K	59	55,2	54	49	43,2
ECP34 1S2 A	344	12	M2K	74	69	68	61	54
ECP34 2S2 A	413	12	M2K	91	85	84	76	67
ECP34 1L2 A	456	12	M2K	114	106	105	94	84
ECP34 2L2 A	492	12	M2K	124	116	114	104	91

For different nominal voltages and not expressed ratings, please consult Factory.

2 Pole Industrial

50/60 Hz | 1 Phase | 0.8 PF | AVR Controlled

Voltage: 220/230/240 Volts
Winding: Standard 12 Leads - Reconnected
RPM: 3000
Insulation: Class H



MODEL	WEIGHT (kg)	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
				Standby 163/27	Standby 150/40	Continuous 125/40 [H]	Continuous 105/40 [F]	Continuous 105/40 [B]
ECP3 1S2	56	12	M2K	5,3	5,1	5	4,5	4
ECP3 2S2	62	12	M2K	6,8	6,4	6,3	6,1	5
ECP3 3S2	68	12	M2K	7,8	7,3	7,2	6,5	5,8
ECP3 1L2	80	12	M2K	10	9,7	9,5	8,6	7,6
ECP3 2L2	88	12	M2K	12,2	11,5	11,3	10,3	9
ECP28 M2 C	126	12	M2K	14,3	13,5	13	11,7	10,5
ECP28 1L2 C	136	12	M2K	16,7	15,8	15,3	13,5	12,2
ECP28 2L2 C	141	12	M2K	19,6	18,5	18	16,2	14,4
ECP28 VL2 C	156	12	M2K	23,5	22	21,6	19,8	17,3
ECP32 1S2 C	173	12	M2K	25,3	24	23,2	20,8	18,6
ECP32 2S2 C	199	12	M2K	28,8	28	26,4	23,2	21
ECP32 M2 C	212	12	M2K	37,5	35,2	34,4	31,2	27,5
ECP32 L2 C	231	12	M2K	47	44,2	43,2	39,2	34,6
ECP34 1S2 A	344	12	M2K	66	62	60	54	48,2
ECP34 2S2 A	413	12	M2K	81,5	77	75	67,5	60
ECP34 1L2 A	456	12	M2K	102	96	93,5	84	75
ECP34 2L2 A	492	12	M2K	110	104	101	93	81,5

Voltage: 220/230/240 Volts
Winding: Standard 12 Leads - Reconnected
RPM: 3600
Insulation: Class H

MODEL	WEIGHT (kg)	LEADS	AVR	kVA @ Temp. Rise / Ambient C				
				Standby 163/27	Standby 150/40	Continuous 125/40 [H]	Continuous 105/40 [F]	Continuous 105/40 [B]
ECP3 1S2	56	12	M2K	5,6	5,4	5,2	4,7	4,2
ECP3 2S2	62	12	M2K	7,4	7	6,6	6,7	5,3
ECP3 3S2	68	12	M2K	8,5	8	7,6	6,8	6,1
ECP3 1L2	80	12	M2K	10,7	10,3	9,9	9	8
ECP3 2L2	88	12	M2K	12,2	12	12	10,4	9,4
ECP28 M2 C	126	12	M2K	15	14,2	13,8	12,3	11
ECP28 1L2 C	136	12	M2K	17,5	16,6	16	14,2	13
ECP28 2L2 C	141	12	M2K	20,6	19,5	19,0	17	15
ECP28 VL2 C	156	12	M2K	24,7	23,8	22,7	20,8	18,2
ECP32 1S2 C	173	12	M2K	25,3	24	23,2	20,8	18,6
ECP32 2S2 C	199	12	M2K	28,8	28	26,4	23,2	21
ECP32 M2 C	212	12	M2K	37,5	35,2	34,4	31,2	27,5
ECP32 L2 C	231	12	M2K	47	44,2	43,2	39,2	34,6
ECP34 1S2 A	344	12	M2K	66,5	63	61	54,5	48,7
ECP34 2S2 A	413	12	M2K	82	78	75,5	68	60
ECP34 1L2 A	456	12	M2K	103	98	94,5	84,5	75,5
ECP34 2L2 A	492	12	M2K	111	105	102	93,5	82

For different nominal voltages and not expressed ratings, please consult Factory.

Portable

2 Pole | 50/60Hz | 1Phase | 1 PF

Winding: Standard - 230V/240V - 4 Lead
RPM: 3000/3600
Insulation: Class H



MECC ALTE PORTABLE

2 Pole | 1Phase (Capacitor)

MODEL	WEIGHT (kg)	kVA @ 1 PF, 50Hz		kVA @ 1 PF, 60Hz	
		115/230 V	%EFF	120/240 V	%EFF
S15W-45	8.1	1.2	68.8	1.45	69.7
S15W-60	10.4	1.8	70.2	2.2	71.2
S15W-75	12.4	2.2	72.5	2.7	73.4
S15W-85	13.4	2.7	73.4	3.4	74.3
S15W-102	14.8	3	73.3	3.7	74.2
S16W-75	14.3	2.5	74	3	74.6
S16W-90	16.1	3.5	75	4.2	75.6
S16W-105	17.7	4.1	76	5	76.6
S16W-130	21	5	77	6	77.6
S16W-150	23.7	5.7	78	6.8	78.6
S16W-75 HD	14.6	2.5	74	3	74.6
S16W-90 HD	16.4	3.5	75	4.2	75.6
S16W-105 HD	18	4.1	76	5	76.6
S16W-130 HD	21.3	5	77	6	77.6
S16W-150 HD	24	5.7	78	6.8	78.6
S20W-95	27.4	6	77.5	7.2	78.2
S20W-110	30.5	7	78.4	8.4	79.2
S20W-130	34.9	8.5	79	10.2	79.8
S16F-150	28	5.5	79	6.6	79.6
S16F-180	31	6.5	79.5	7.8	80.1
S20FS-130 P	41.7	8.5	79	10.5	79.4
S20FS-160 P	48.7	10.0	79.2	12	79.6
S20F-200 P	56.5	12.0	80.3	14.4	80.8
S20F-230 P	60	13.0	82.1	15.5	82.7

Above machines are brushless with capacitor control and optional AVR.

2 Pole | 1Phase (AVR)

MODEL	WEIGHT (kg)	kVA @ 1 PF, 50Hz		kVA @ 1 PF, 60Hz	
		115/230 V	%EFF	120/240 V	%EFF
ES16W-75 HD	15.6	2.3	73.7	2.7	74.2
ES16W-90 HD	17.5	3	74.2	3.6	74.8
ES16W-105 HD	19.6	3.5	77	4.2	77.7
ES16W-130 HD	22.8	4.5	79.4	5.4	80
ES16W-150 HD	25.5	5	79.7	6	80.3
ES16F-130	25.8	4.5	79.4	5.5	80
ES16F-160	29.8	5.5	79.8	6.8	80.5
ES20FS-130 P	41.2	8	79.4	9.6	79.8
ES20FS-160 P	48.2	9.5	79.6	11.4	80
ES20F-200 P	56	11	80.7	13.2	81.2

Above machines are brush type with AVR control.

Portable

2 Pole | 50/60Hz | 3Phase | 0.8 PF

Winding: Standard - 400V/480V - 6 Lead
 RPM: 3000/3600
 Insulation: Class H



MECC ALTE PORTABLE

2 Pole 3Phase (Transformer)		kVA @ 0.8 PF, 50Hz		kVA @ 0.8 PF, 60Hz	
MODEL	WEIGHT (kg)	230/400 V	%EFF	277/480 V	%EFF
T16F-130	30.5	6.0	79.8	7.2	80.3
T16F-160	34.5	7.5	82.0	9	82.5
T20FS-130 P	44.7	10	81.5	12	83.0
T20FS-160 P	51.7	12.5	82.0	15	83.5
T20F-200 P	59.5	15	82.6	18	83.8

Above machines are brush type with transformer control.

2 Pole 3Phase (AVR)		kVA @ 0.8 PF, 50Hz		kVA @ 0.8 PF, 60Hz	
MODEL	WEIGHT (kg)	230/400 V	%EFF	277/480 V	%EFF
ET16F-130	30	5.5	80.2	6.6	80.6
ET16F-160	34	6.5	82.3	7.8	82.5
ET20FS-130 P	44.2	9	81.9	11	83.6
ET20FS-160 P	51.2	11.5	82.4	14	83.9
ET20F-200 P	59	13.5	82.9	16.5	84.1

Above machines are brush type with AVR control.

Multi Pole PMG

AC | High Frequency | 3 Phase | 1 PF

Voltage: AC Output Application: AC/AC Converter


RPM: Variable

Insulation: Class H

Temp. Rise / Ambient C° = 125/40 [H]

MECC ALTE PMG

MODEL	Speed [rpm]										
	1000	1300	1500	1800	2000	2200	2500	3000	3600	4000	
PM3G H30/16	1,5	1,9	2,1	2,6	2,9	3,2	3,8	4,6	5,5	6,0	MAX PWR kVA
PM3G H40/16	3,0	3,4	3,8	4,3	4,7	5,1	5,6	6,3	7,2	7,7	
PM5G H25/20	2,2	2,8	3,3	4,0	4,4	4,8	5,5	6,5	7,5	8,3	
PM5G H30/20	2,5	3,3	3,8	4,5	5,0	5,5	6,4	7,5	9,0	10,0	
PM5G H42/20	2,8	3,6	4,2	5,1	5,7	6,4	7,5	9,0	11,0	12,2	
PM5G H60/20	4,3	5,5	6,5	7,8	8,7	9,5	10,8	13,0	15,5	17,2	
PM5G H80/20	5,5	7,2	8,3	10,0	11,0	12,0	13,8	16,5	19,5	21,7	
PM5G H100/20	6,5	8,5	10,0	12,0	13,5	14,5	16,5	20,0	24,0	26,7	
PM7G H60/20	7,0	9,0	10,0	12,0	13,0	14,7	16,7	20,0	24,0	26,7	
PM7G H80/20	9,0	12,0	13,5	16,2	18,0	20,0	22,5	27,0	32,0	35,6	
PM7G H120/20	12,0	15,0	17,5	21,0	23,3	25,5	29,0	35,0	42,0	46,7	

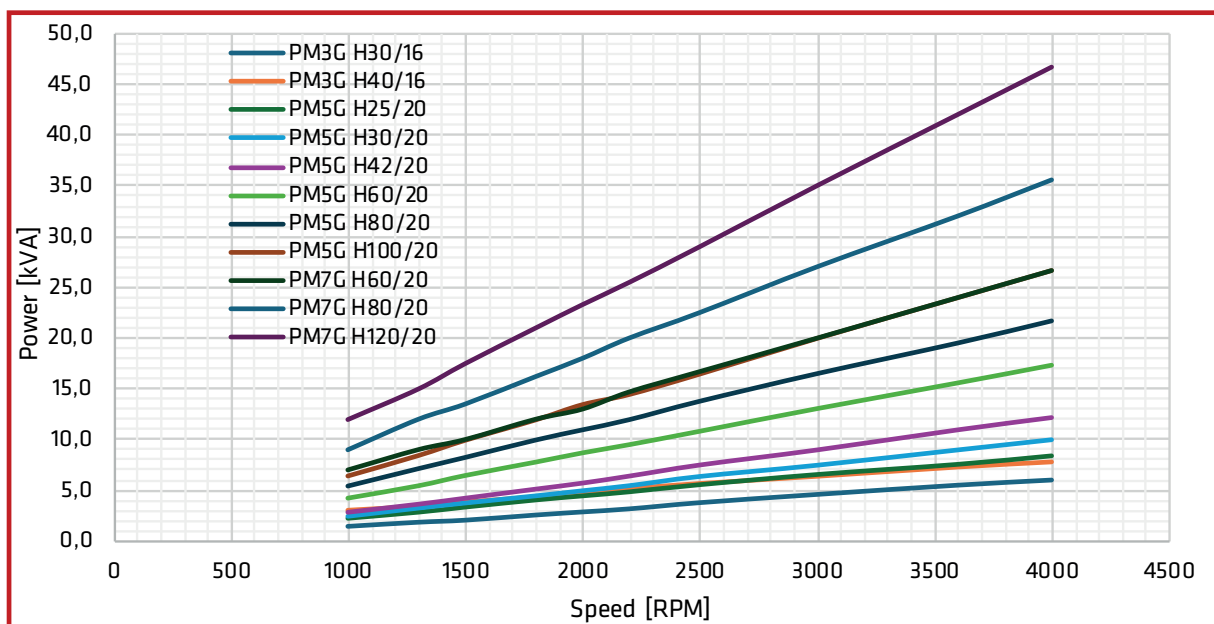

Multi Pole PMG


DC | 3 Phase | 1 PF | RPM Control

Voltage: DC Nominal Output 24VDC
 RPM: Variable
 Insulation: Class H
 Temp. Rise / Ambient C° = 125/40 [H]

Charging Voltage: up to 30VDC
 Application: Battery Charging

MECC ALTE PMG

MODEL	Speed [rpm]							
	1500		2000		2400		3000	
	I max [A]	P Max [kW]	I max [A]	P Max [kW]	I max [A]	P Max [kW]	I max [A]	P Max [kW]
PM3G H30/16	23	0,7	53	1,6	87	2,6	120	3,6
PM3G H40/16	33	1,0	77	2,3	120	3,6	170	5,1
PM5G H25/20	87	2,6	120	3,6	187	5,6	263	7,9
PM5G H30/20	110	3,3	143	4,3	213	6,4	307	9,2
PM5G H42/20	127	3,8	160	4,8	237	7,1	340	10,2
PM5G H60/20	143	4,3	203	6,1	290	8,7	407	12,2
PM5G H80/20	213	6,4	297	8,9	390	11,7	507	15,2
PM5G H100/20	290	8,7	373	11,2	483	14,5	597	17,9
PM7G H60/20	307	9,2	390	11,7	510	15,3	630	18,9
PM7G H80/20	373	11,2	477	14,3	613	18,4	750	22,5
PM7G H120/20	460	13,8	580	17,4	730	21,9	920	27,6

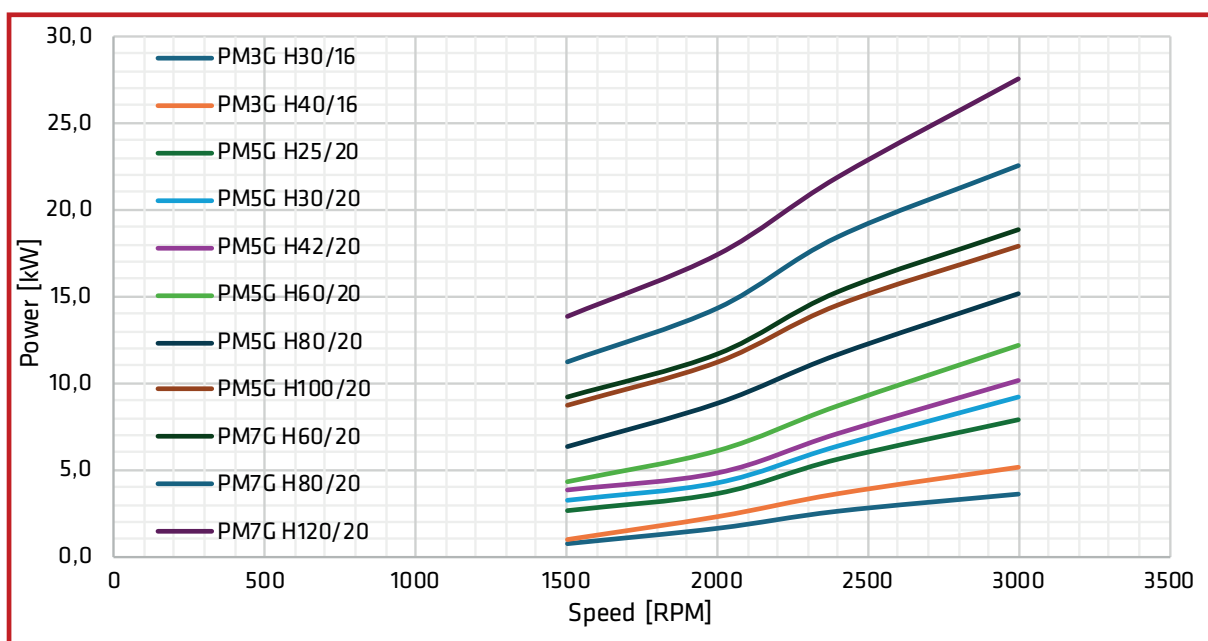

Multi Pole PMG


DC | 3 Phase | 1 PF | RPM Control

Voltage: DC Nominal Output 48VDC
RPM: Variable
Insulation: Class H
Temp. Rise / Ambient C° = 125/40 [H]

Charging Voltage: up to 58VDC
Application: Battery Charging

MECC ALTE PMG

MODEL	Speed [rpm]							
	1500		2000		2400		3000	
	I max [A]	P Max [kW]	I max [A]	P Max [kW]	I max [A]	P Max [kW]	I max [A]	P Max [kW]
PM3G H30/16	14	0,8	32	1,8	50	2,9	70	4,1
PM3G H40/16	20	1,2	45	2,6	70	4,1	100	5,8
PM5G H25/20	50	2,9	70	4,1	110	6,4	155	9,0
PM5G H30/20	65	3,8	85	4,9	125	7,3	180	10,4
PM5G H42/20	75	4,4	95	5,5	140	8,1	200	11,6
PM5G H60/20	85	4,9	120	7,0	170	9,9	240	13,9
PM5G H80/20	125	7,3	175	10,2	230	13,3	300	17,4
PM5G H100/20	170	9,9	220	12,8	285	16,5	350	20,3
PM7G H60/20	180	10,4	230	13,3	300	17,4	370	21,5
PM7G H80/20	220	12,8	280	16,2	360	20,9	440	25,5
PM7G H120/20	270	15,7	340	19,7	430	24,9	540	31,3

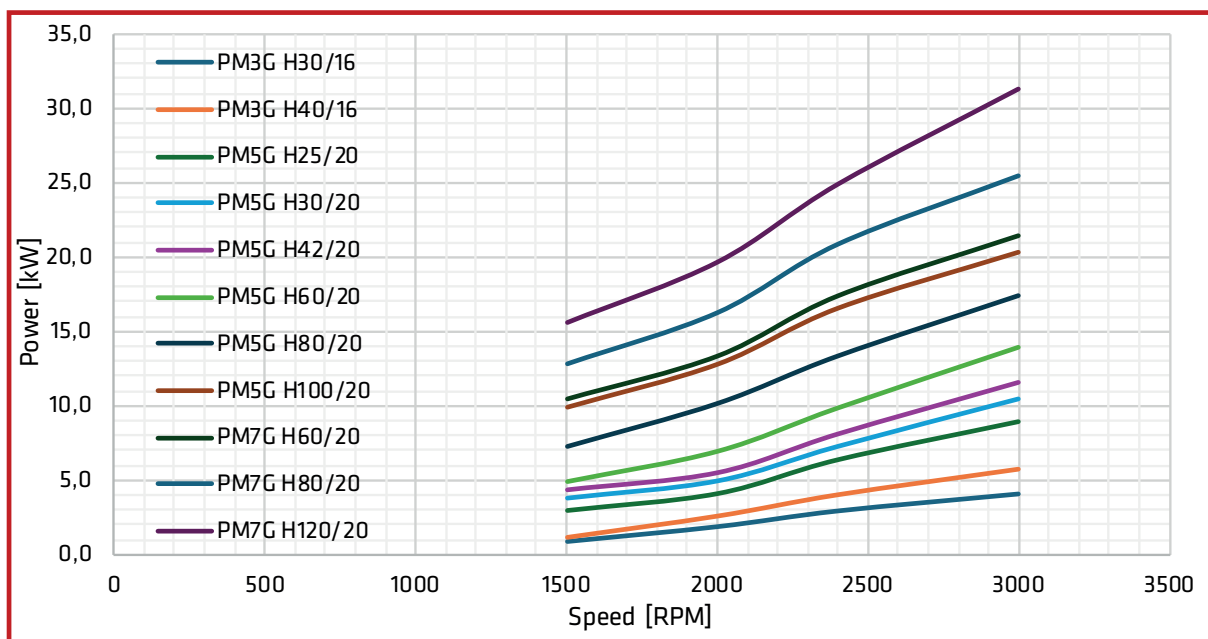

Multi Pole PMG


DC | 3 Phase | 1 PF | RPM Control

Voltage: DC Nominal Output 72VDC
RPM: Variable
Insulation: Class H
Temp. Rise / Ambient C° = 125/40 [H]

Charging Voltage: up to 86VDC
Application: Battery Charging

MECC ALTE PMG

MODEL	Speed [rpm]							
	1500		2000		2400		3000	
	I max [A]	P Max [kW]	I max [A]	P Max [kW]	I max [A]	P Max [kW]	I max [A]	P Max [kW]
PM3G H30/16	10	0,9	23	2,0	37	3,2	52	4,5
PM3G H40/16	15	1,3	33	2,9	52	4,5	74	6,4
PM5G H25/20	37	3,2	52	4,5	82	7,0	115	9,9
PM5G H30/20	48	4,1	63	5,4	93	8,0	134	11,5
PM5G H42/20	56	4,8	70	6,1	104	8,9	148	12,8
PM5G H60/20	63	5,4	89	7,7	126	10,8	178	15,3
PM5G H80/20	93	8,0	130	11,2	171	14,7	223	19,1
PM5G H100/20	126	10,8	163	14,0	211	18,2	260	22,3
PM7G H60/20	134	11,5	171	14,7	223	19,1	274	23,6
PM7G H80/20	163	14,0	208	17,9	267	23,0	326	28,1
PM7G H120/20	200	17,2	252	21,7	319	27,4	401	34,5

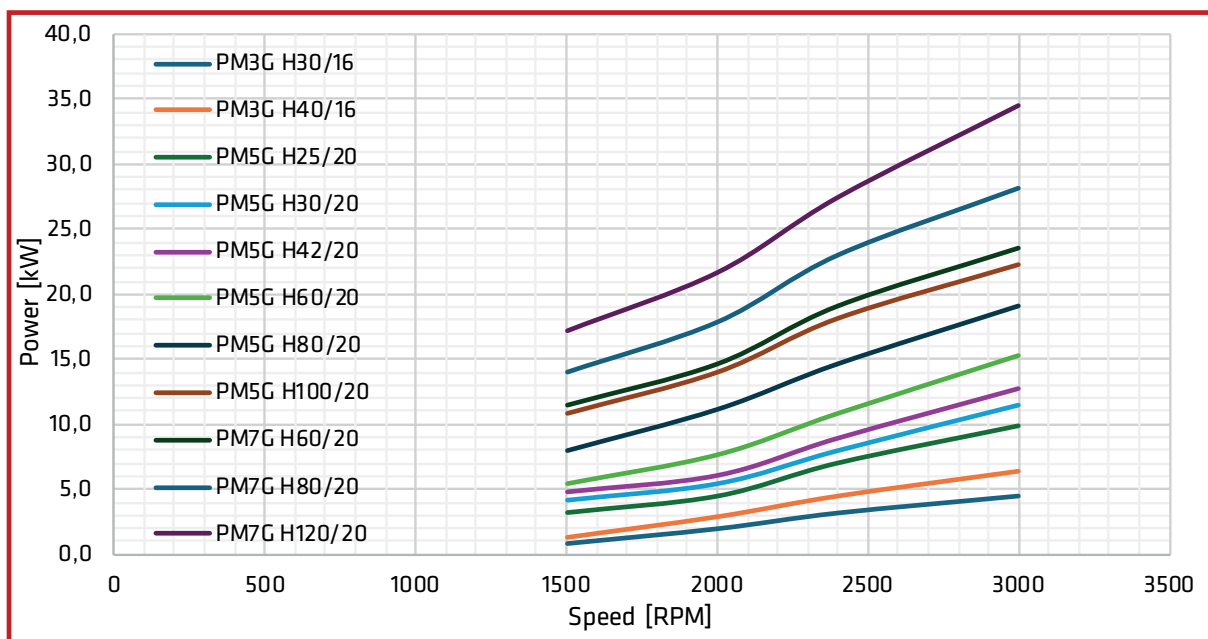

Multi Pole PMG


DC | 3 Phase | 1 PF | RPM Control

Voltage: DC Nominal Output 716VDC
RPM: Variable
Insulation: Class H
Temp. Rise / Ambient C° = 125/40 [H]

Charging Voltage: up to 800VDC
Application: Battery Charging

MECC ALTE PMG

MODEL	Speed [rpm]							
	1500		2000		2400		3000	
	I max [A]	P Max [kW]	I max [A]	P Max [kW]	I max [A]	P Max [kW]	I max [A]	P Max [kW]
PM3G H30/16	1	1,0	3	2,3	5	3,7	6	5,1
PM3G H40/16	2	1,5	4	3,3	6	5,1	9	7,3
PM5G H25/20	5	3,7	6	5,1	10	8,1	14	11,4
PM5G H30/20	6	4,8	8	6,2	11	9,2	17	13,2
PM5G H42/20	7	5,5	9	7,0	13	10,3	18	14,7
PM5G H60/20	8	6,2	11	8,8	16	12,5	22	17,6
PM5G H80/20	11	9,2	16	12,8	21	16,9	28	22,0
PM5G H100/20	16	12,5	20	16,1	26	20,9	32	25,7
PM7G H60/20	17	13,2	21	16,9	28	22,0	34	27,1
PM7G H80/20	20	16,1	26	20,5	33	26,4	40	32,3
PM7G H120/20	25	19,8	31	24,9	39	31,5	50	39,6

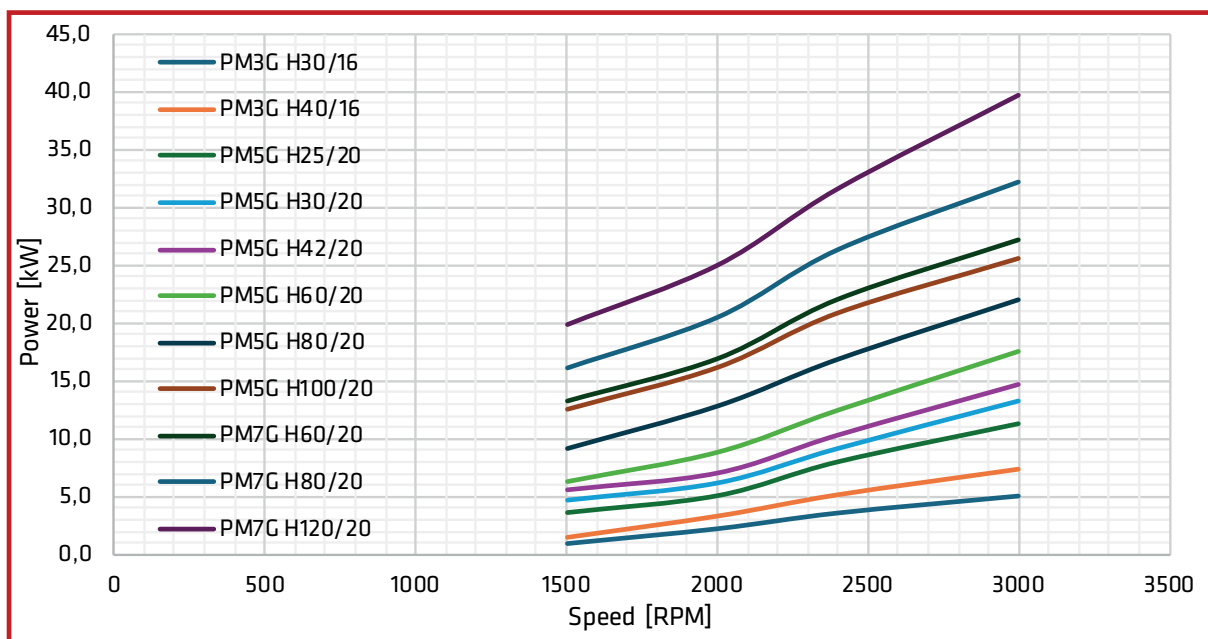


Multi Pole PMG

DC | 3 Phase | 1 PF | RPM Fixed

Voltage: DC Nominal Output 48-72VDC Application: Lighting Tower
 RPM: 1500 RPM
 Insulation: Class H
 Temp. Rise / Ambient C° = 125/40 [H]

MECC ALTE PMG

MODEL	POWER [kW]							
	Percentage of voltage drop							
	0%	5%	10%	15%	20%	25%	30%	35%
PM3G H30/16	0,0	0,1	0,4	1,0	1,4	1,7	1,9	2,0
PM3G H40/16	0,0	0,2	0,6	1,2	1,9	2,3	2,5	2,7
PM5G H25/20	0,0	0,3	0,7	1,4	2,2	2,5	2,7	2,9
PM5G H30/20	0,0	0,4	0,8	1,6	2,6	3,0	3,2	3,4
PM5G H42/20	0,0	0,5	1,0	1,9	3,1	3,5	3,8	4,0
PM5G H60/20	0,0	0,6	1,2	2,3	3,5	4,1	4,5	4,8
PM5G H80/20	0,0	0,8	1,8	3,6	6,6	8,1	9,1	9,8
PM5G H100/20	0,0	1,0	2,4	5,5	9,7	11,0	11,9	12,5
PM7G H60/20	-	-	-	-	-	-	-	-
PM7G H80/20	-	-	-	-	-	-	-	-
PM7G H120/20	-	-	-	-	-	-	-	-

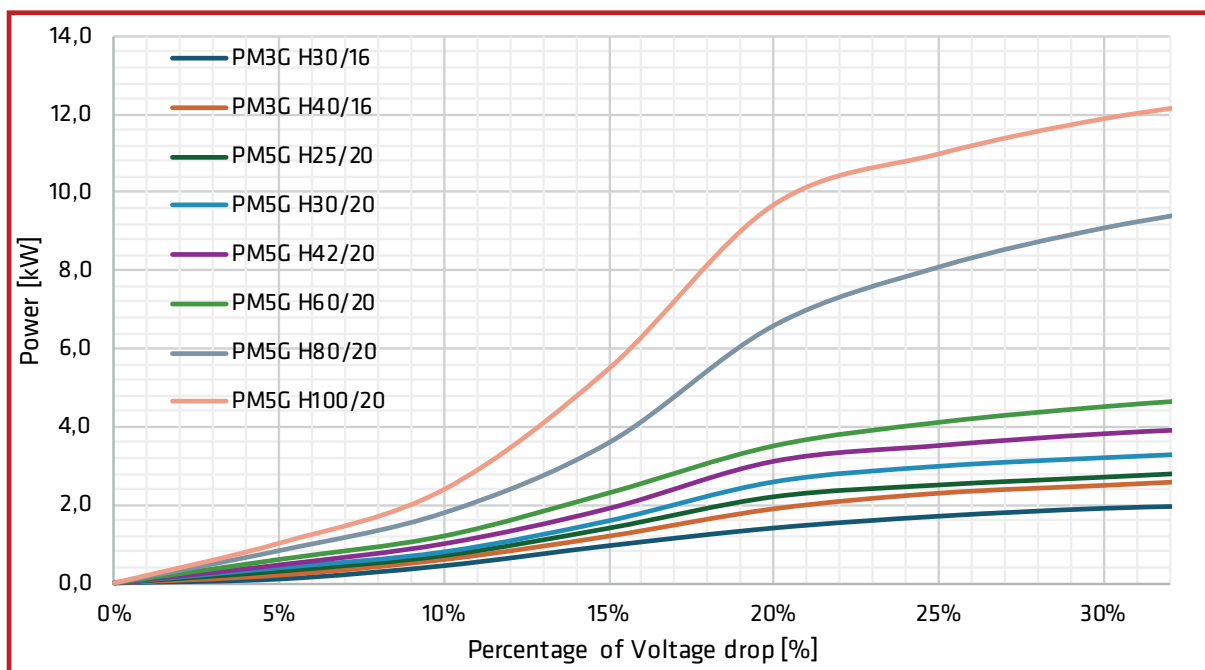

	Example Percentage of voltage drop							
	0%	5%	10%	15%	20%	25%	30%	35%
Nom. 48 VDC	64	61	58	54	51	48	45	42
Nom. 72 VDC	96	91	86	82	77	72	67	62


Multi Pole PMG

DC | 3 Phase | 1 PF | RPM Fixed

Voltage: DC Nominal Output 48-72VDC Application: Lighting Tower
 RPM: 1800 RPM
 Insulation: Class H
 Temp. Rise / Ambient C° = 125/40 [H]

MECC ALTE PMG

MODEL	POWER [kW]							
	Percentage of voltage drop							
	0%	5%	10%	15%	20%	25%	30%	35%
PM3G H30/16	0,0	0,1	0,6	1,2	1,8	2,2	2,5	2,6
PM3G H40/16	0,0	0,3	0,8	1,6	2,5	3,0	3,3	3,5
PM5G H25/20	0,0	0,4	0,9	1,8	2,9	3,3	3,5	3,8
PM5G H30/20	0,0	0,5	1,0	2,1	3,4	3,9	4,2	4,4
PM5G H42/20	0,0	0,6	1,3	2,5	4,0	4,6	4,9	5,2
PM5G H60/20	0,0	0,8	1,6	3,0	4,6	5,3	5,9	6,2
PM5G H80/20	0,0	1,1	2,3	4,7	8,6	10,5	11,8	12,7
PM5G H100/20	0,0	1,3	3,1	7,2	12,6	14,3	15,5	16,3
PM7G H60/20	-	-	-	-	-	-	-	-
PM7G H80/20	-	-	-	-	-	-	-	-
PM7G H120/20	-	-	-	-	-	-	-	-

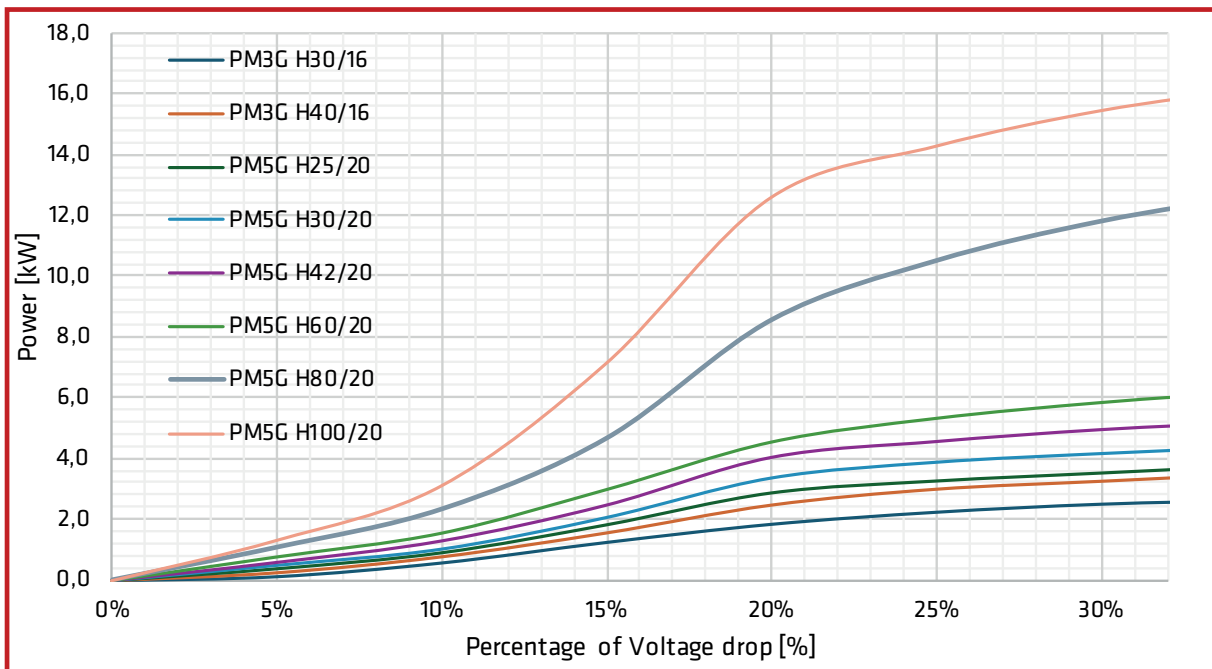


Multi Pole PMG

DC | 3 Phase | 1 PF | RPM Fixed

Voltage: DC Nominal Output 48-72VDC Application: Lighting Tower
 RPM: 2300 RPM
 Insulation: Class H
 Temp. Rise / Ambient C° = 125/40 [H]

MECC ALTE PMG

MODEL	POWER [kW]							
	Percentage of voltage drop							
	0%	5%	10%	15%	20%	25%	30%	35%
PM3G H30/16	0,0	0,2	0,8	1,7	2,5	3,1	3,5	3,6
PM3G H40/16	0,0	0,4	1,1	2,2	3,5	4,2	4,6	4,9
PM5G H25/20	0,0	0,5	1,3	2,5	4,0	4,6	4,9	5,3
PM5G H30/20	0,0	0,7	1,5	2,9	4,7	5,5	5,9	6,2
PM5G H42/20	0,0	0,8	1,8	3,5	5,6	6,4	6,9	7,3
PM5G H60/20	0,0	1,1	2,2	4,2	6,4	7,5	8,2	8,7
PM5G H80/20	0,0	1,5	3,3	6,6	12,0	14,7	16,6	17,8
PM5G H100/20	0,0	1,9	4,4	10,0	17,7	20,0	21,7	22,8
PM7G H60/20	-	-	-	-	-	-	-	-
PM7G H80/20	-	-	-	-	-	-	-	-
PM7G H120/20	-	-	-	-	-	-	-	-

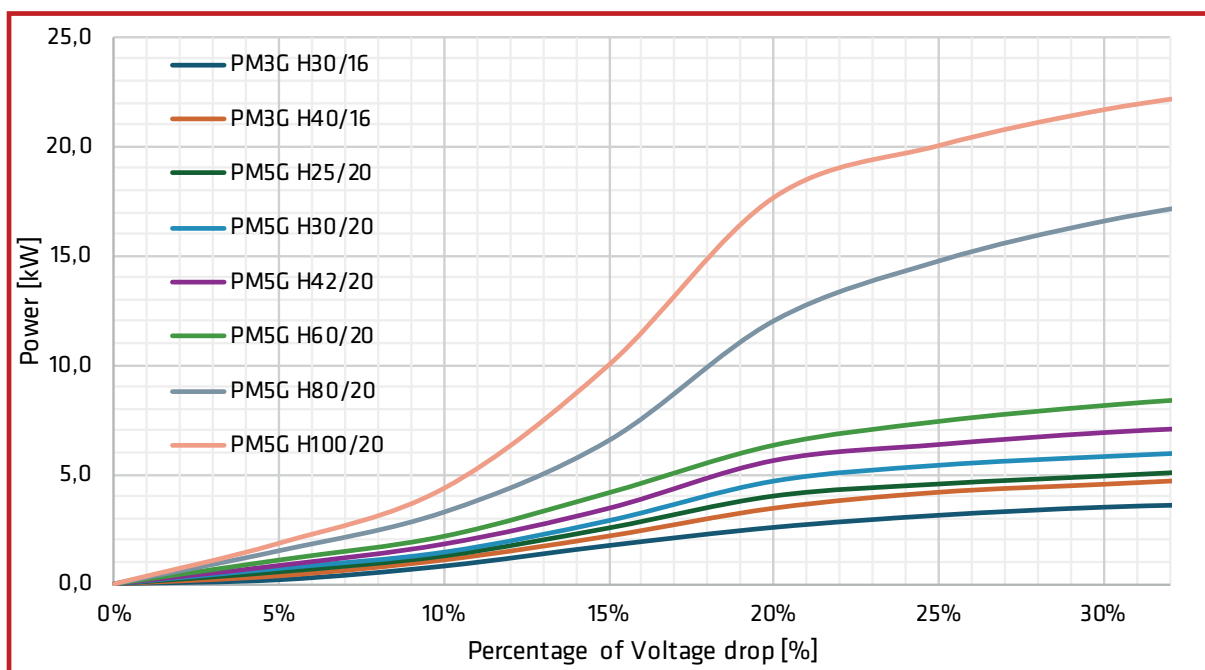









Note: 0% is equivalent to the maximum no-load voltage the load can accept. After defining the maximum voltage, the maximum required voltage drop (hence the usage window) can be calculated using percentages. These values are purely demonstrative. The power output may change depending on the applied voltage.

50Hz Connections



Wiring Diagram

50

Three Phase

50Hz		Series 3, 4, 28, 30, 31, 32, 34, 38				Series 40, 43, 46, 47				
Series Star		L-L	380	400	415	440	760	800	830	880
		L-N	220	230	240	254	440	460	480	508
Parallel Star		L-L	190	200	208	220	380	400	415	440
		L-N	110	115	120	127	220	230	240	254
Series Delta		L-L	220	230	240	254	440	460	480	508
		L-M	110	115	120	127	220	230	240	254
Parallel Delta		L-L	110	115	120	127	220	230	240	254
Zig-Zag (*)		L-L	330	346	360	380	660	690	720	760
		L-N	191	200	208	220	380	400	415	440
Single Phase Series High Zig-Zag		L-L	440	460	480	508	880	920	960	1016
		L-M	220	230	240	254	440	460	480	508
Single Phase Parallel Zig-Zag		L-L	220	230	240	254	440	460	480	508
		L-M	110	115	120	127	220	230	240	254
Single Phase Double Delta (**)		L-L	220	230	240	254	440	460	480	508
		L-M	110	115	120	127	220	230	240	254

Single Phase (Dedicated Winding)

50Hz			Series 3, 4, 28, 30, 31, 32, 34		
Series		L-L	220	230	240
		L-M	110	115	120
Parallel		L-L	110	115	120

In case of single phase load, it is important that the phase current does not exceed the nominal value.

(*) Rated power must be multiplied by 0.866.

(**) Half of rated power is obtainable when connecting between L1-M or L2-M.

60Hz Connections

Wiring Diagram

60

Three Phase

60Hz		Series 3, 4, 28, 30, 31, 32, 34, 38					Series 40, 43, 46, 47			
Series Star		L-L	415	440	460	480	830	880	920	960
		L-N	240	254	266	277	480	508	530	554
Parallel Star		L-L	208	220	230	240	415	440	460	480
		L-N	120	127	133	139	240	254	266	277
Series Delta		L-L	240	254	266	277	480	508	530	554
		L-M	120	127	133	139	240	252	266	277
Parallel Delta		L-L	120	127	133	139	240	252	266	277
Zig-Zag (*)		L-L	359	380	400	415	720	760	800	830
		L-N	207	220	230	240	415	440	460	480
Single Phase Series High Zig-Zag		L-L	480	508	532	554	880	920	960	1108
		L-M	240	254	266	277	440	460	480	554
Single Phase Parallel Zig-Zag		L-L	240	254	266	277	440	460	480	554
		L-M	120	127	133	139	220	230	240	277
Single Phase Double Delta (**)		L-L	240	254	266	277	440	460	480	554
		L-M	120	127	133	139	220	230	240	277

Single Phase (Dedicated Winding)

60Hz			Series 3, 4, 28, 30, 31, 32, 34		
Series		L-L	220	230	240
		L-M	110	115	120
Parallel		L-L	110	115	120

In case of single phase load, it is important that the phase current does not exceed the nominal value.

(*) Rated power must be multiplied by 0.866.


(**) Half of rated power is obtainable when connecting between L1-M or L2-M.

SAE Flywheel Housing Dimensions

Mounting Arrangements


S.A.E. Flywheel Housing Dimensions, mm (in)

SAE No.	A	B	C	Holes	Size
00	787,4 (31)	850,9 (33.5)	883 (34.75)	16	M12 (1/2)
0	647,7 (25.5)	679,5 (26.75)	711 (28)	16	M12 (1/2)
1/2	584,2 (23)	619,1 (24 3/8)	648 (25.5)	12	M12 (1/2)
1	511,2 (20 1/8)	530,2 (20 7/8)	552 (21.75)	12	M10 (7/16)
2	447,7 (17 5/8)	466,7 (18 3/8)	489 (19.25)	12	M10 (3/8)
3	409,6 (16 1/8)	428,6 (16 7/8)	451 (17.75)	12	M10 (3/8)
4	362 (14.25)	381 (15)	403 (15 7/8)	12	M10 (3/8)
5	314,3 (12 3/8)	333,4 (13 1/8)	356 (14)	8	M10 (3/8)



S.A.E. Flywheel Dimensions, mm (in)

Flywheel	A	B	C	XG	Holes	Size
21	584,2 (23)	641,35 (25.25)	673,1 (26.5)	0	12	M16 (5/8)
18	498,5 (19 5/8)	542,35 (21 3/8)	571,5 (22.5)	15,7 (5/8)	6	M16 (5/8)
14	409,6 (16 1/8)	438,15 (17.25)	466,72 (18 3/8)	25,4 (1)	8	M12 (1/2)
11 1/2	314,3 (12.375)	333,37 (13.125)	352,42 (13 7/8)	39,6 (1 9/16)	8	M10 (3/8)
10	276,2 (10 7/8)	295,27 (11 5/8)	314,32 (12 3/8)	53,8 (2 1/8)	8	M10 (3/8)
8	225,4 (8 7/8)	244,47 (9 5/8)	263,52 (10 3/8)	62 (2 7/16)	6	M10 (3/8)
7 1/2	206,4 (8 1/8)	222,25 (8.75)	241,3 (9 1/2)	30,2 (1 3/16)	8	M8 (5/16)
6 1/2	184,2 (7.25)	200 (7 7/8)	215,9 (8 1/2)	30,2 (1 3/16)	6	M8 (5/16)



Available Mounting Arrangements

Adaptor	Coupling	ECP3	ECP4	ECP28	ECP30	ECP32	ECP34	ECO38	ECO40	ECO43	ECO46	ECO47	NPE32	NPE34
5	6.5	•	•	•	•	•							•	
	7.5	•	•	•	•	•							•	
	8	•	•	•	•	•							•	
4	6.5	•	•	•	•	•							•	
	7.5	•	•	•	•	•*							•	
	8	•	•	•	•	•							•	
	10	•	•	•	•	•							•	•
3	7.5			•										
	8	•	•	•	•	•							•	
	10	•	•	•	•	•	•						•	
	11.5	•	•	•	•	•	•	•					•	•
2	10			•		•	•	•						
	11.5			•		•	•	•						
1	11.5					•		•						
	14						•	•	•	•				
1/2	14							•	•	•				
	18								•	•				
0	14							•	•	•				
	18								•	•	•			
	21									•	•			
00	18									•	•	•		
	21									•	•	•		

* Available only on "S" and "M" models

Infographic Icon Summary



TWO POLE



FOUR POLE



MULTI POLE



HERTZ



HERTZ



HERTZ




SINGLE PHASE




THREE PHASE



FOUR WIRE




SIX WIRE



TWELVE WIRE



CAPACITOR



COMPOUND



DIGITAL AVR
VOLTAGE REGULATOR



AVR DER2
VOLTAGE REGULATOR

NOTES

[illegible]

MECC ALTE SPA (HQ)

Via Roma
20 - 36051 Creazzo
Vicenza - ITALY

T: +39 0444 396111
E: info@meccalte.it
aftersales@meccalte.it

MECC ALTE PORTABLE

Via A. Volta
1 37038 Soave
Verona - ITALY

T: +39 0456 173411
E: info@meccalte.it
aftersales@meccalte.it

MECC ALTE POWER PRODUCTS

Via Melaro
2 - 36075 Montecchio
Maggiore (VI) - ITALY

T: +39 0444 1831295
E: info@meccalte.it
aftersales@meccalte.it

ZANARDI ALTERNATORI

Via Dei Laghi
48/B - 36077 Altavilla
Vicenza - ITALY

T: +39 0444 370799
E: info@zanardialternatori.it

UNITED KINGDOM

Mecc Alte U.K. LTD
6 Lands' End Way
Oakham
Rutland LE15 6RF
T: +44 (0) 1572 771160
E: info@meccalte.co.uk

SPAIN

Mecc Alte España S.A.
C/ Rio Taibilla, 2 Polig.
Ind. Los Valeros
03178 Benijofar (Alicante)
T: +34 (0) 96 6702152
E: info@meccalte.es

CHINA

Mecc Alte Alternator Haimen LTD
755 Nanhai East Rd
Jiangsu HEDZ 226100 PRC
T: +86 (0) 513 82325758
E: info@meccalte.cn

INDIA

Mecc Alte India PVT LTD
Plot NO: 1, Sanaswadi
Talegaon
Dhamdhare Road Taluka:
Shirur, District:
Pune - 412208
Maharashtra, India
T: +91 2137 673200
E: info@meccalte.in

U.S.A. AND CANADA

Mecc Alte Inc.
1229 Adams Drive McHenry,
IL, 60051
T: +1 815 344 0530
E: info@meccalte.us

GERMANY

Mecc Alte Generatoren GmbH
Bucher Hang 2
D-87448 Waltenhofen
T: +49 (0)831 540755 0
E: info@meccalte.de

AUSTRALIA

Mecc Alte Alternators PTY LTD 10
Duncan Road, PO Box 1046 Dry
Creek, 5094, South Australia
T: +61 (0) 8 8349 8422
E: info@meccalte.com.au

FRANCE

Mecc Alte International S.A.
Z.E. la Gagnerie
16330 St. Amant de Boixe
T: +33 (0) 545 397562
E: info@meccalte.fr

FAR EAST

Mecc Alte (F.E.) PTE LTD
10V Enterprise Road, Enterprise 10
Singapore 627679
T: +65 62 657122
E: info@meccalte.com.sg



www.meccalte.com

The world's largest independent
producer of alternators 1 - 5,000kVA



MASPA: 03.2026 | V14