




QYH

系列高压无刷发电机
SERIES MEDIUM AND HIGH VOLTAGE ALTERNATORS

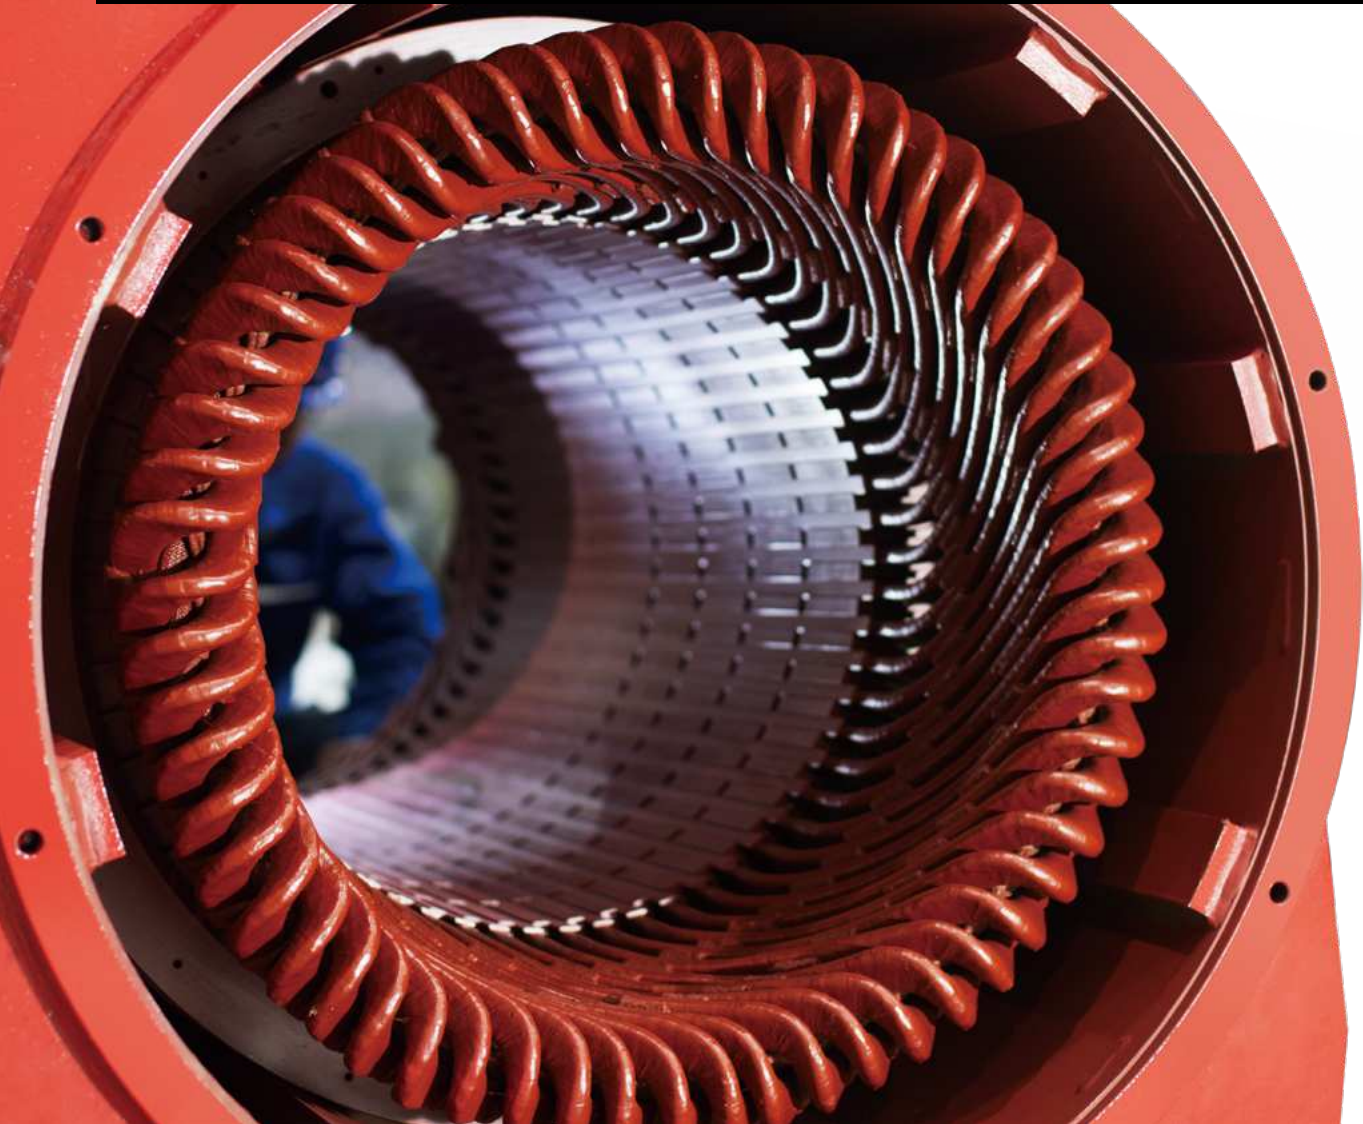

QYH

系列高压无刷发电机
SERIES MEDIUM AND HIGH VOLTAGE ALTERNATORS



应用领域

铨一中高压发电机适用于电站、矿业、数据中心、工业商业，建筑工地等应用领域。

符合各项标准

铨一中高压发电机符合 IEC60034,GB755,ISO8528-3 等标准，在 ISO9001 和 ISO14001 认证环境下制作生产。

Application Fields

The Fir stall Medium to High Voltage Alternator is suitable for application fields such as power plant, mining, data centers.

Compliant With Various Standards

The Fir stall Medium to High Voltage Alternator complies with standards such as IEC60034, GB755, ISO8528-3, and is produced in an ISO9001 and ISO14001 certified environment.

通用数据 GENERAL CHARACTERISTICS

绝缘等级 Class of insulation	H	励磁方式 Excitation	PMG
节距 Winding type	p5/6*	AVR 型号 AVR type	数字 DVR
引出线方式 Winding leads	6 出线 6 Leads	稳态电压调整率 Voltage regulation	± 0.5%
海拔 Altitude	≤ 1000m	短路电流能力 Short circuit current capacity	3 倍额定电流 10s 3 In:10s
防护等级 Protection Class	IP23	总谐波失真 THD (**) Total Harmonic Distortion THD(**)	< 3%
冷却方式 Cooling	IC01	电话谐波因数 THF (**) Waveform: I.E.C.THF(**)	< 3%
超速 Overspeed(rpm)	2250min-1	电话干扰因数 TIF (**) Waveform: NEMA THF(**)	< 50

*2/3 可选。功率咨询工厂
** 空载或非畸变负载下的线电压总谐波失真

*2/3 optional, consult factory for power
**Total Harmonic Distortion of Line Voltage under No-load or Non-distorted Load

产品选型表 PRODUCT SELECTION TABLE

10/10.5/11kV 4P-50Hz-1500rpm-PF0.8

三相 3PH; 星接 Y Connection; 绝缘等级 Insulation: H; 海拔 Altitude ≤ 1000m							
型号 Type	温升等级 Temperature Rise: F		温升等级 Temperature Rise: H				
	持续 Continuous 40°C /105K		持续 Continuous 40°C /125K		备用 Stand-by 40°C /150K		备用 Stand-by 27°C /163K
	kW	kVA	kW	kVA	kW	kVA	kVA
QYH 404SA	300	375	330	413	353	441	360 450
QYH 404SB	360	450	400	500	428	534	436 544
QYH 404MC	420	525	450	563	482	602	491 613
QYH 404MD	500	625	550	688	589	736	600 749
QYH 404LE	600	750	650	812	695	869	708 885
QYH 454SA	500	625	550	688	589	736	600 749
QYH 454SB	600	750	650	812	695	869	708 885
QYH 454MC	700	875	750	937	802	1003	817 1021
QYH 454MD	800	1000	850	1062	909	1136	926 1158
QYH 454LE	900	1125	950	1187	1016	1270	1035 1294
QYH 454LF	1000	1250	1050	1313	1124	1404	1145 1431
QYH 454VLG	1100	1375	1150	1437	1230	1537	1253 1566
QYH 454VLH	1200	1500	1250	1563	1325	1657	1350 1688
QYH 504SC	1400	1750	1500	1875	1590	1988	1620 2025
QYH 504SD	1500	1875	1600	2000	1696	2120	1728 2160
QYH 504ME	1600	2000	1800	2250	1908	2385	1944 2430
QYH 504MF	1800	2250	2000	2500	2120	2650	2160 2700
QYH 504LG	2000	2500	2200	2750	2332	2915	2376 2970
QYH 504LH	2200	2750	2400	3000	2520	3150	2568 3210
QYH 564SB	2200	2750	2400	3000	2520	3150	2568 3210
QYH 564SC	2400	3000	2600	3250	2730	3413	2782 3478
QYH 564MD	2600	3250	2800	3500	2940	3675	2996 3745
QYH 564ME	2800	3500	3000	3750	3150	3938	3210 4013
QYH 564LF	3000	3750	3200	4000	3360	4200	3424 4280

产品选型表 PRODUCT SELECTION TABLE

6/6.3/6.6kV 4P-50Hz-1500rpm-PF0.8

三相 3PH; 星接 Y Connection; 绝缘等级 Insulation: H; 海拔 Altitude ≤ 1000m							
型号 Type	温升等级 Temperature Rise: F		温升等级 Temperature Rise: H				
	持续 Continuous 40°C /105K		持续 Continuous 40°C /125K		备用 Stand-by 40°C /150K		备用 Stand-by 27°C /163K
	kW	kVA	kW	kVA	kW	kVA	kVA
QYH 404SA	330	412.5	360	450	385	481	392 490
QYH 404SB	400	500	450	562	481	601	490 613
QYH 404MC	450	563	500	625	535	668	545 681
QYH 404MD	550	687.5	600	750	642	803	654 818
QYH 404LE	650	813	700	875	749	936	763 954
QYH 454SA	600	750	654	818	700	875	713 891
QYH 454SB	700	875	770	963	824	1030	839 1049
QYH 454MD	800	1000	870	1088	931	1164	949 1186
QYH 454LE	900	1125	980	1225	1049	1311	1068 1335
QYH 454LF	1000	1250	1080	1350	1156	1445	1177 1472
QYH 454VLG	1100	1375	1191	1489	1275	1593	1299 1623
QYH 454VLHS	1200	1500	1300	1625	1391	1738	1417 1771
QYH 504SC	1470	1875	1633	2041	1731	2163	1763 2204
QYH 504SD	1600	2000	1760	2200	1865	2332	1901 2376
QYH 504MEL	1800	2250	2000	2500	2120	2650	2160 2700
QYH 504MFL	2000	2500	2200	2750	2332	2915	2376 2970
QYH 504LGL	2200	2750	2400	3000	2544	3180	2592 3240
QYH 564SB	2400	3000	2600	3250	2730	3413	2782 3478
QYH 564SC	2600	3250	2800	3500	2940	3675	2996 3745
QYH 564MDL	2800	3500	3000	3751	3150	3938	3210 4013
QYH 564MEL	3000	3750	3200	4000	3360	4200	3424 4280
QYH 564LF	3200	4000	3400	4250	3570	4463	3638 4548

产品选型表 PRODUCT SELECTION TABLE

3/3.3kV 4P-50Hz-1500rpm-PF0.8

三相 3PH; 星接 Y Connection; 绝缘等级 Insulation: H; 海拔 Altitude ≤ 1000m							
型号 Type	温升等级 Temperature Rise: F		温升等级 Temperature Rise: H				
	持续 Continuous 40°C /105K		持续 Continuous 40°C /125K		备用 Stand-by 40°C /150K		备用 Stand-by 27°C /163K
	kW	kVA	kW	kVA	kW	kVA	kVA
QYH 404SA	330	412.5	360	450	385	481	392 490
QYH 404SB	400	500	450	562	481	601	490 613
QYH 404MC	450	563	500	625	535	668	545 681
QYH 404MD	550	687.5	600	750	642	803	654 818
QYH 404LE	650	813	700	875	749	936	763 954
QYH 454SA	600	750	654	818	700	875	713 891
QYH 454SB	700	875	770	963	824	1030	839 1049
QYH 454MD	800	1000	870	1088	931	1164	949 1186
QYH 454LE	900	1125	980	1225	1049	1311	1068 1335
QYH 454LF	1000	1250	1080	1350	1156	1445	1177 1472
QYH 454VLG	1100	1375	1191	1489	1275	1593	1299 1623
QYH 454VLHS	1200	1500	1300	1625	1391	1738	1417 1771
QYH 504SC	1470	1875	1633	2041	1731	2163	1763 2204
QYH 504SD	1600	2000	1760	2200	1865	2332	1901 2376
QYH 504MEL	1800	2250	2000	2500	2120	2650	2160 2700
QYH 504MFL	2000	2500	2200	2750	2332	2915	2376 2970
QYH 504LGL	2200	2750	2400	3000	2544	3180	2592 3240
QYH 564SB	2400	3000	2600	3250	2730	3413	2782 3478
QYH 564SC	2600	3250	2800	3500	2940	3675	2996 3745
QYH 564MDL	2800	3500	3000	3751	3150	3938	3210 4013
QYH 564MEL	3000	3750	3200	4000	3360	4200	3424 4280
QYH 564LF	3200	4000	3400	4250	3570	4463	3638 4548

产品选型表 PRODUCT SELECTION TABLE

13.2/13.8kV 4P-60Hz-1800rpm-PF0.8

三相 3PH; 星接 Y Connection; 绝缘等级 Insulation: H; 海拔 Altitude ≤ 1000m							
型号 Type	温升等级 Temperature Rise: F		温升等级 Temperature Rise: H				
	持续 Continuous 40°C /105K		持续 Continuous 40°C /125K		备用 Stand-by 40°C /150K		备用 Stand-by 27°C /163K
	kW	kVA	kW	kVA	kW	kVA	kVA
QYH 454MA	500	625	550	688	589	736	600 749
QYH 454MB	600	750	650	812	695	869	708 885
QYH 454LCL	700	875	750	937	802	1003	817 1021
QYH 454LD	800	1000	850	1062	909	1136	926 1158
QYH 454VLE	900	1125	950	1187	1016	1270	1035 1294
QYH 454VLF	1000	1250	1050	1313	1124	1404	1145 1431
QYH 454VLG	1100	1375	1150	1437	1230	1537	1253 1566
QYH 504SB	1200	1500	1300	1625	1325	1657	1350 1688
QYH 504SC	1400	1750	1500	1875	1590	1988	1620 2025
QYH 504MD	1500	1875	1600	2000	1696	2120	1728 2160
QYH 504ME	1600	2000	1800	2250	1908	2385	1944 2430
QYH 504LF	1800	2250	2000	2500	2120	2650	2160 2700
QYH 504LGS	2000	2500	2200	2750	2332	2915	2376 2970
QYH 564SB	2200	2750	2400	3000	2520	3150	2568 3210
QYH 564SCS	2400	3000	2600	3250	2730	3413	2782 3478
QYH 564MCL	2600	3250	2800	3500	2940	3675	2996 3745
QYH 564MDL	2800	3500	3000	3750	3150	3938	3210 4013
QYH 564LEL	3000	3750	3200	4000	3360	4200	3424 4280

产品选型表 PRODUCT SELECTION TABLE

10/10.5/11kV 6P-50Hz-1000rpm-PF0.8

三相 3PH; 星接 Y Connection; 绝缘等级 Insulation: H; 海拔 Altitude ≤ 1000m							
型号 Type	温升等级 Temperature Rise: F		温升等级 Temperature Rise: H				
	持续 Continuous 40°C /105K		持续 Continuous 40°C /125K		备用 Stand-by 40°C /150K		备用 Stand-by 27°C /163K
	kW	kVA	kW	kVA	kW	kVA	kVA
QYH 506SB	720	900	800	1000	856	1070	872 1090
QYH 506SC	800	1000	900	1125	963	1204	981 1226
QYH 506SD	900	1125	1000	1250	1070	1337	1090 1362
QYH 506ME	1000	1250	1100	1375	1177	1471	1199 1499
QYH 506MF	1100	1375	1200	1500	1284	1605	1308 1635
QYH 506LG	1200	1500	1300	1625	1391	1738	1417 1771
QYH 506LH	1400	1750	1500	1875	1605	2006	1635 2044