

RM500U Series

Reference Design

5G Module Series

Version: 1.1

Date: 2023-08-31

Status: Released



At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

Tel: +86 21 5108 6236

Email: info@quectel.com

Or our local offices. For more information, please visit:

<http://www.quectel.com/support/sales.htm>.

For technical support, or to report documentation errors, please visit:

<http://www.quectel.com/support/technical.htm>.

Or email us at: support@quectel.com.

Legal Notices

We offer information as a service to you. The provided information is based on your requirements and we make every effort to ensure its quality. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. We may revise or restate this document from time to time at our sole discretion without any prior notice to you.

Use and Disclosure Restrictions

License Agreements

Documents and information provided by us shall be kept confidential, unless specific permission is granted. They shall not be accessed or used for any purpose except as expressly provided herein.

Copyright

Our and third-party products hereunder may contain copyrighted material. Such copyrighted material shall not be copied, reproduced, distributed, merged, published, translated, or modified without prior written consent. We and the third party have exclusive rights over copyrighted material. No license shall be granted or conveyed under any patents, copyrights, trademarks, or service mark rights. To avoid ambiguities, purchasing in any form cannot be deemed as granting a license other than the normal non-exclusive, royalty-free license to use the material. We reserve the right to take legal action for noncompliance with abovementioned requirements, unauthorized use, or other illegal or malicious use of the material.

Trademarks

Except as otherwise set forth herein, nothing in this document shall be construed as conferring any rights to use any trademark, trade name or name, abbreviation, or counterfeit product thereof owned by Quectel or any third party in advertising, publicity, or other aspects.

Third-Party Rights

This document may refer to hardware, software and/or documentation owned by one or more third parties ("third-party materials"). Use of such third-party materials shall be governed by all restrictions and obligations applicable thereto.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing or usage of trade.

Privacy Policy

To implement module functionality, certain device data are uploaded to Quectel's or third-party's servers, including carriers, chipset suppliers or customer-designated servers. Quectel, strictly abiding by the relevant laws and regulations, shall retain, use, disclose or otherwise process relevant data for the purpose of performing the service only or as permitted by applicable laws. Before data interaction with third parties, please be informed of their privacy and data security policy.

Disclaimer

- a) We acknowledge no liability for any injury or damage arising from the reliance upon the information.
- b) We shall bear no liability resulting from any inaccuracies or omissions, or from the use of the information contained herein.
- c) While we have made every effort to ensure that the functions and features under development are free from errors, it is possible that they could contain errors, inaccuracies, and omissions. Unless otherwise provided by valid agreement, we make no warranties of any kind, either implied or express, and exclude all liability for any loss or damage suffered in connection with the use of features and functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage may have been foreseeable.
- d) We are not responsible for the accessibility, safety, accuracy, availability, legality, or completeness of information, advertising, commercial offers, products, services, and materials on third-party websites and third-party resources.

Copyright © Quectel Wireless Solutions Co., Ltd. 2023. All rights reserved.

About the Document

Revision History

Version	Date	Author	Description
-	2022-12-09	Len CHEN	Creation of the document
1.0	2023-02-27	Len CHEN	First official release
1.1	2023-08-31	Len CHEN	Added the applicable modules RM500U-EA and RM500U-CNV.

Contents

About the Document..... 3

Contents 4

1 Reference Design..... 5

 1.1. Introduction 5

 1.2. Schematics 5

1 Reference Design


1.1. Introduction

This document provides the reference design of Quectel RM500U series module. The reference design includes block diagram, power supply designs, module interfaces, AP interfaces, (U)SIM interface design, Ethernet and SLIC solutions, etc.

1.2. Schematics


The schematics illustrated in the following pages are provided for your reference only.

Block Diagram

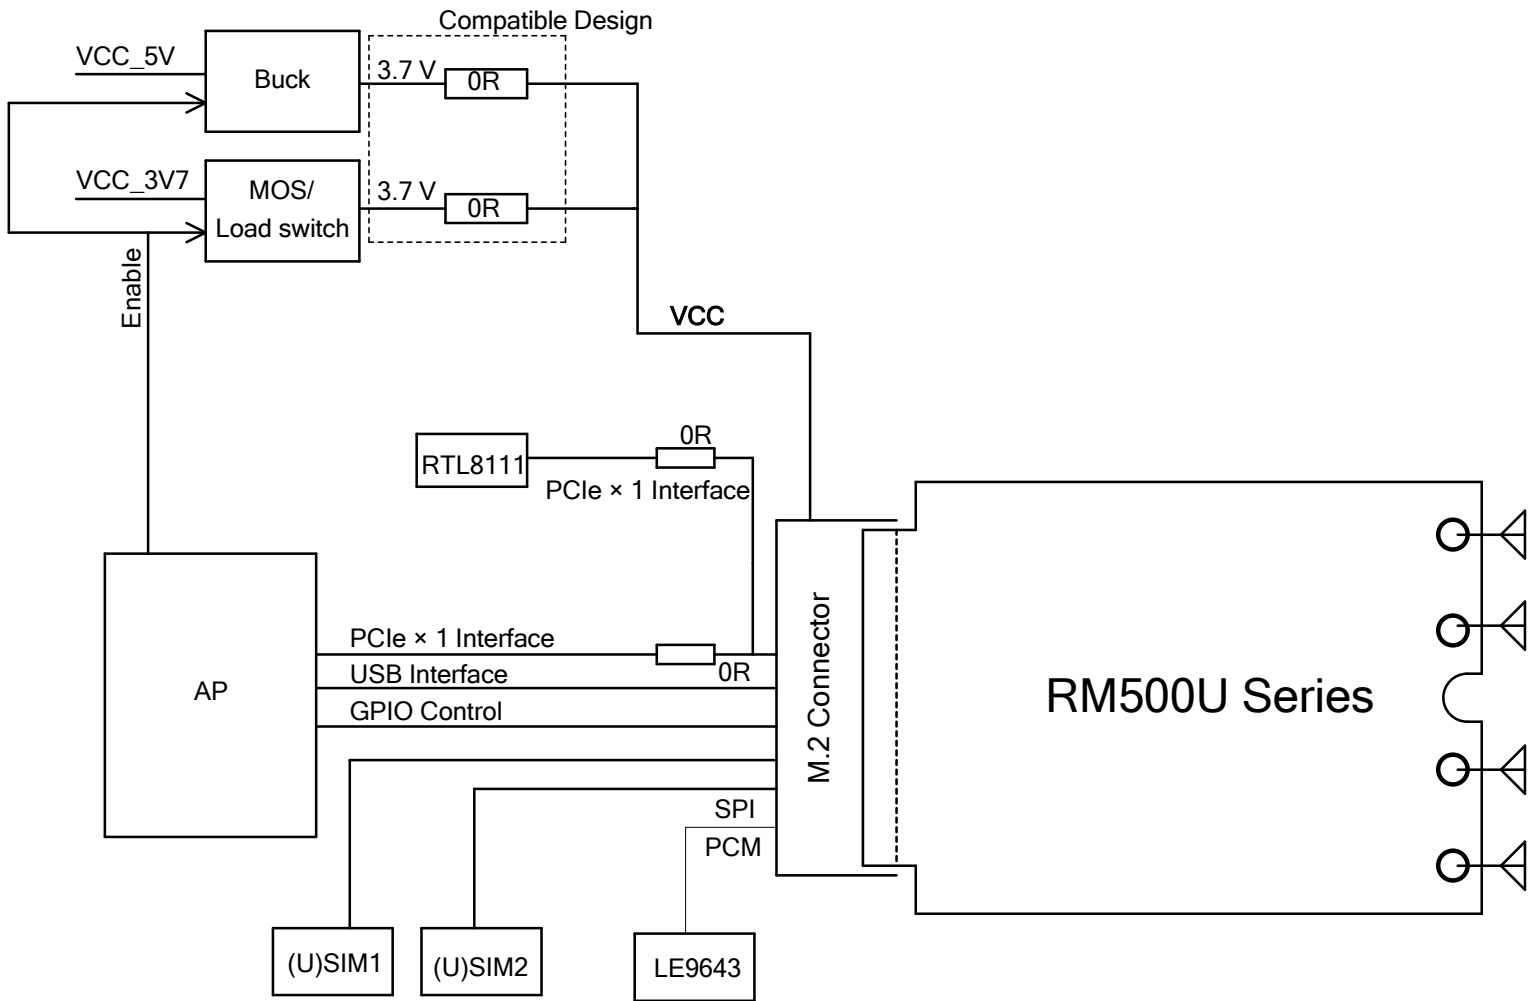

Quectel Wireless Solutions		
DRAWN BY Len CHEN	PROJECT RM500U Series	TITLE Reference Design
CHECKED BY King MA	SIZE A2	VER 1.1
	SHEET 1 / 9 DATE 2023/8/31	

Power Supply Design (Part 1)

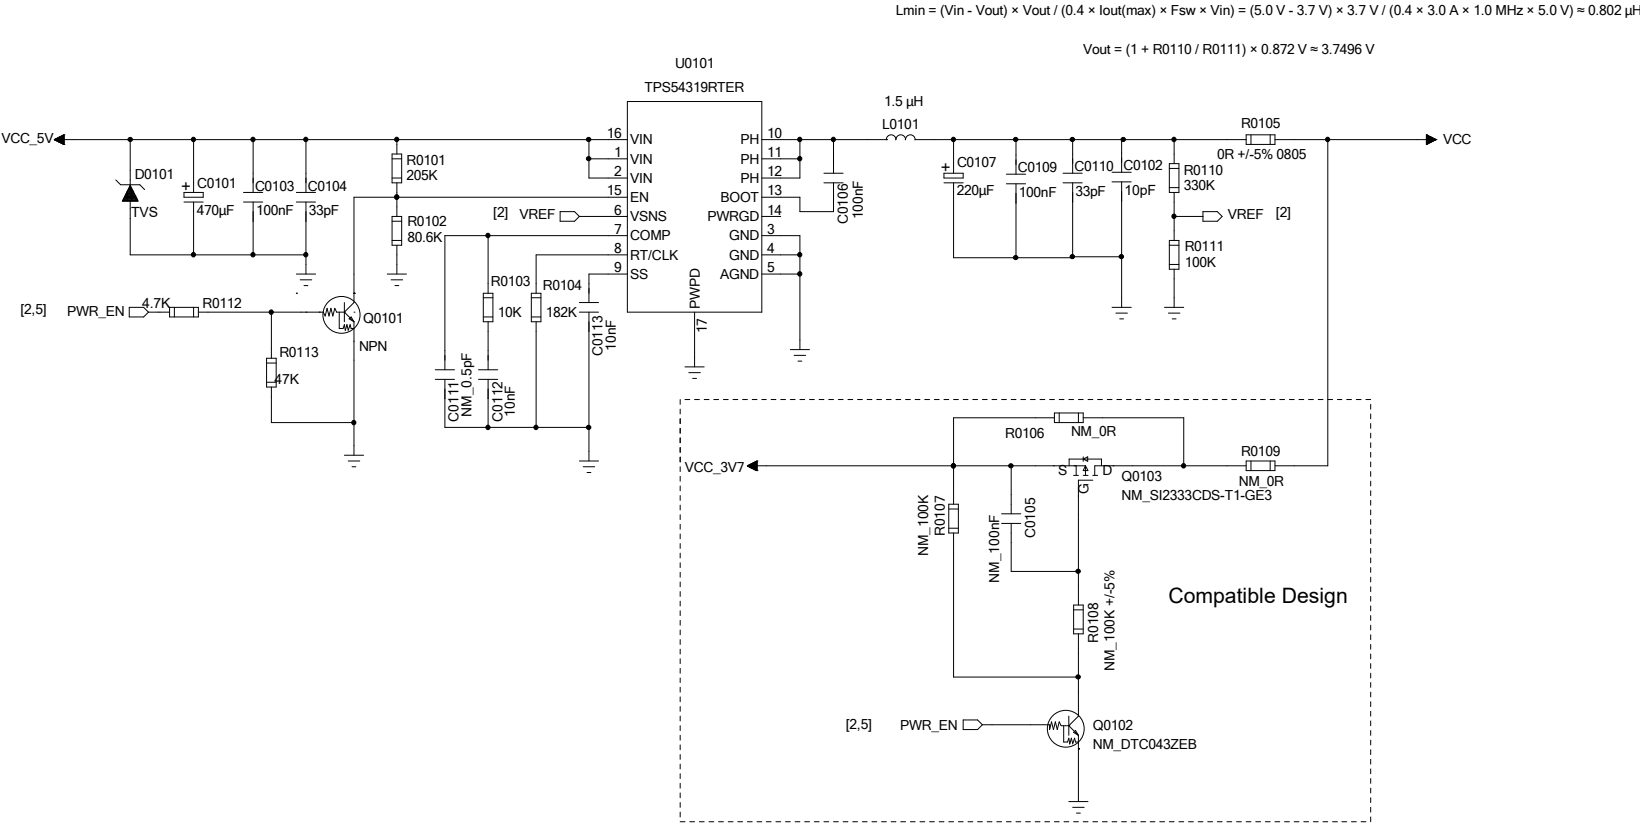


NOTE:

The power supply is critical to the module's performance. The continuous current of the power supply should be 3 A at least and the peak current should be 4 A at least.









Quectel Wireless Solutions		
DRAWN BY Len CHEN	PROJECT RM500U Series	TITLE Reference Design
CHECKED BY King MA	SIZE A2	VER 1.1
SHEET 2 / 9		DATE 2023/8/31

Power Supply Design (Part 2)

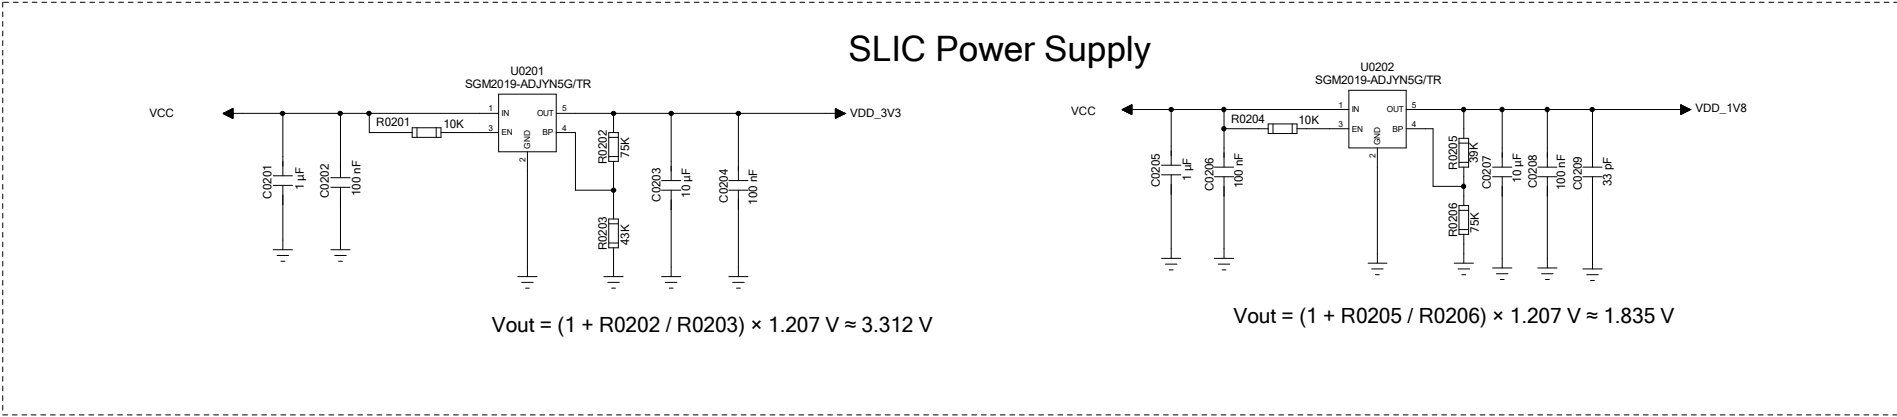



Quectel Wireless Solutions		
DRAWN BY Len CHEN	PROJECT RM500U Series	TITLE Reference Design
CHECKED BY King MA	SIZE A2	VER 1.1
	SHEET 3 / 9 DATE 2023/8/31	

Module Interfaces

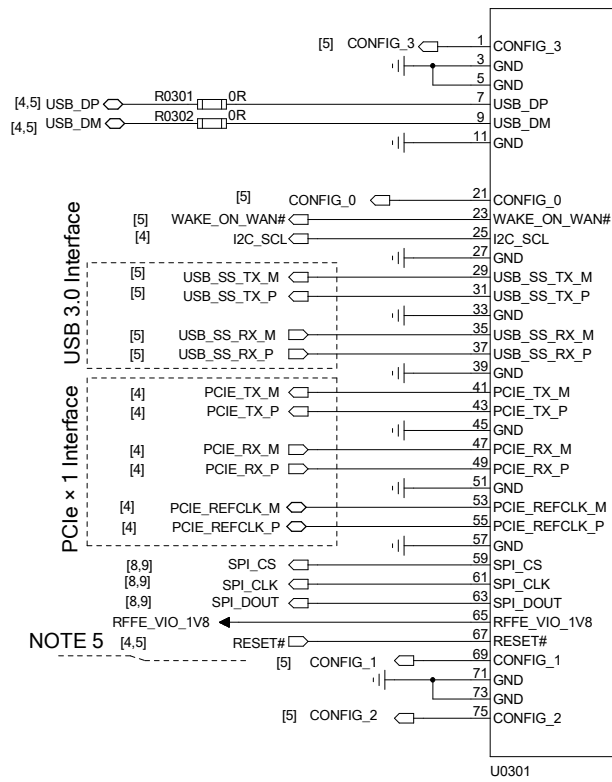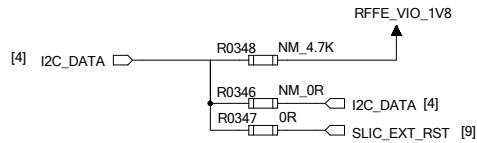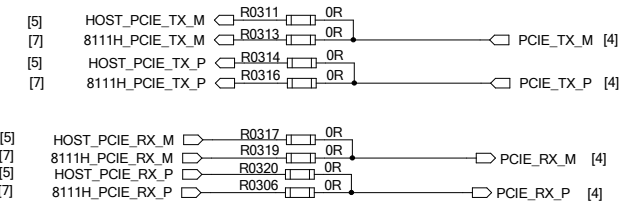



NOTE 5

U0301 RM500U Series

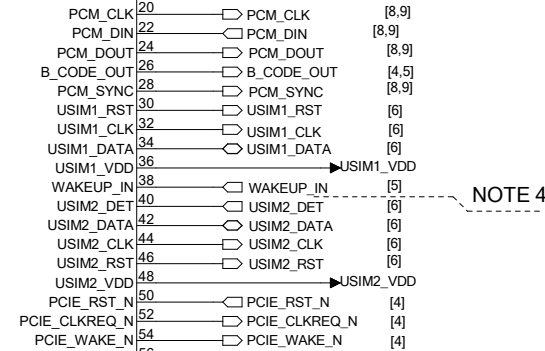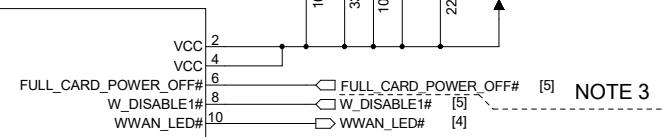

NOTE 1

Reserved Test Points

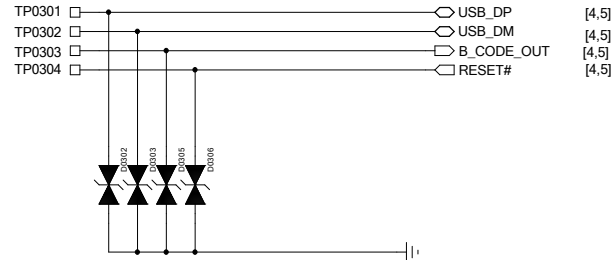





NOTE:

- Test points must be reserved for USB 2.0 interface for firmware upgrade, and the stub length of USB test points should be minimized.
Ensure that the stray capacitance of the ESD protection components is less than 1 pF. B_CODE_OUT and RESET# are recommended to be reserved if unused.
- It is recommended to add a voltage regulator near the module power supply pins.
- Use the GPIO interface of the AP to control the FULL_CARD_POWER_OFF# of the module.
- WAKEUP_IN is used for sleep mode control of the module, and it is internally pulled up to 1.8 V with a 100 kΩ resistor. When it is driven low, the module enters sleep mode, and when it is driven high, the module can be woken up from sleep mode.
- RESET# is internally pulled up with a 20 kΩ resistor to VCC and cannot be directly connected to the GPIO of the host. A NPN driver circuit, NMOS driver circuit or a button can be used to control the pin.
And a test point is recommended to be reserved if unused.
- RFFE_VIO_1V8 is the 1.8 V power supply for external pull-up circuits. If the signal that connects to the module needs to be pulled up to 1.8 V, you must select the RFFE_VIO_1V8 as the pull-up power supply.

Quectel Wireless Solutions

DRAWN BY Len CHEN	PROJECT RM500U Series	TITLE Reference Design
CHECKED BY King MA	SIZE A2	VER 1.1
SHEET 4 / 9		DATE 2023/8/31

AP Interfaces

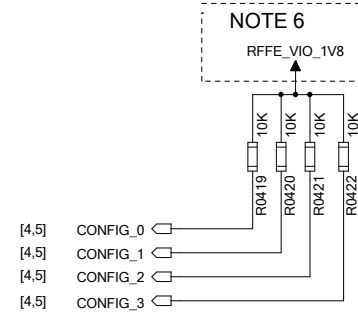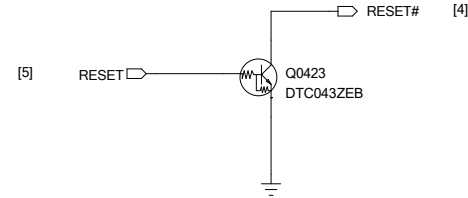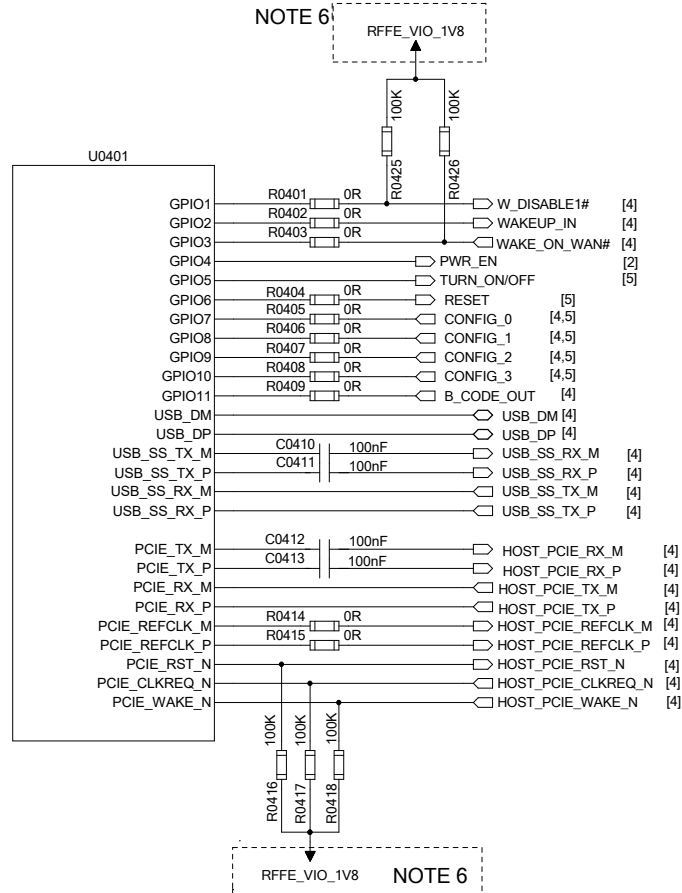


NOTE:

- U0401 represents your device.
- Ensure that C0410-C0413 are placed as close to your device as possible.
- The impedance of the USB 2.0 and USB 3.0 signal traces needs to be controlled at 90 Ω .
- The impedance of the PCIe signals needs to be controlled at 100 $\Omega \pm 10\%$.
- Keep the ESD protection components as close to the USB connector as possible.
- For an AP with 1.8 V power domain, RFFE_VIO_1V8 can be used as the pull-up power supply.
 For an AP with 3.3 V power domain, RFFE_VIO_1V8 should control whether to enable the 3.3 V power supply.

Quectel Wireless Solutions

DRAWN BY Len CHEN	PROJECT RM500U Series	TITLE Reference Design
CHECKED BY King MA	SIZE A2	VER 1.1
SHEET 5 / 9		DATE 2023/8/31

(U)SIM Interface Design

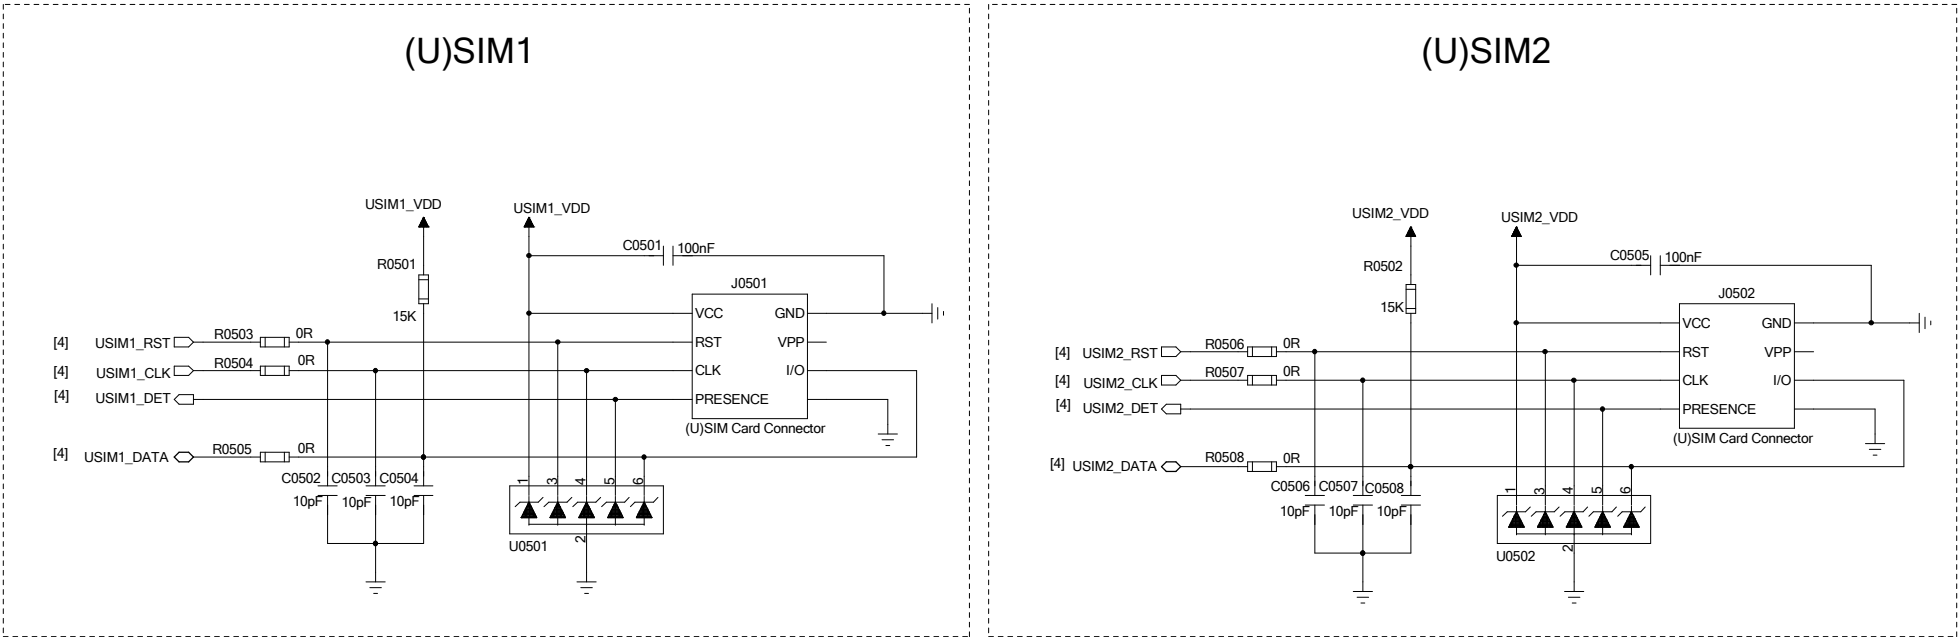


NOTE:

- 1. The decoupling capacitors of USIM1_VDD and USIM2_VDD should be placed close to the (U)SIM card connector.
- 2. The module provides USIM1_DET and USIM2_DET for detecting (U)SIM cards.
This reference design is only for normally closed (U)SIM card connector that supports high and low level detection.
- 3. The 0 Ω resistors (R0503-R0508) should be added in series between the module and the (U)SIM card connector to suppress EMI spurious transmission and enhance ESD protection.
- 4. To offer better ESD protection, it is recommended to add a TVS array (U0501 and U0502) of which a parasitic capacitance not exceeding 10 pF, and place it as close as possible to the (U)SIM card connenor.
- 5. The (U)SIM card connector needs to be placed close to the M.2 connector as long PCB traces will affect the signal quality.


Quectel Wireless Solutions		
DRAWN BY Len CHEN	PROJECT RM500U Series	TITLE Reference Design
CHECKED BY King MA	SIZE A2	VER 1.1
	SHEET 6 / 9 DATE 2023/8/31	

Ethernet


RJ45

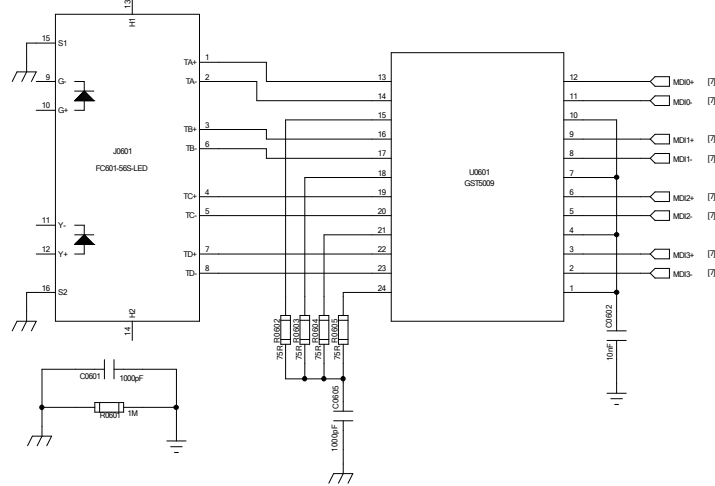


TVS

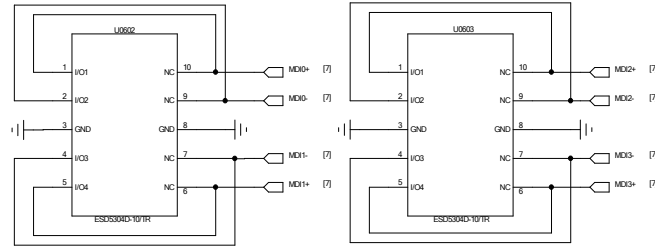


Power Supply

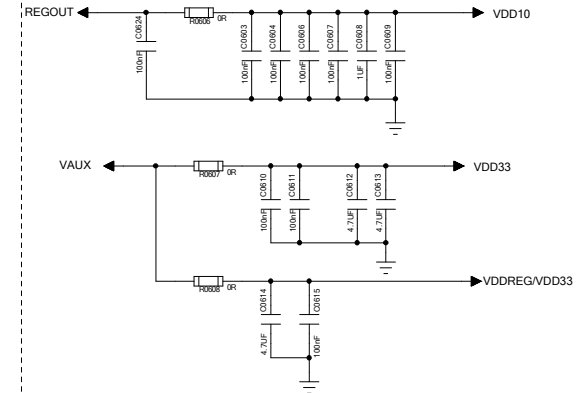


Network Indication LEDs

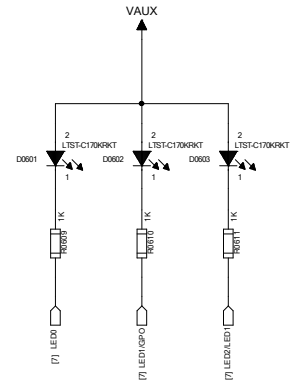

Crystal

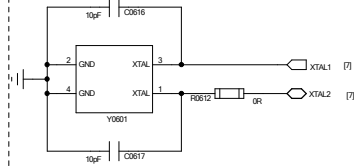

RTL8111H

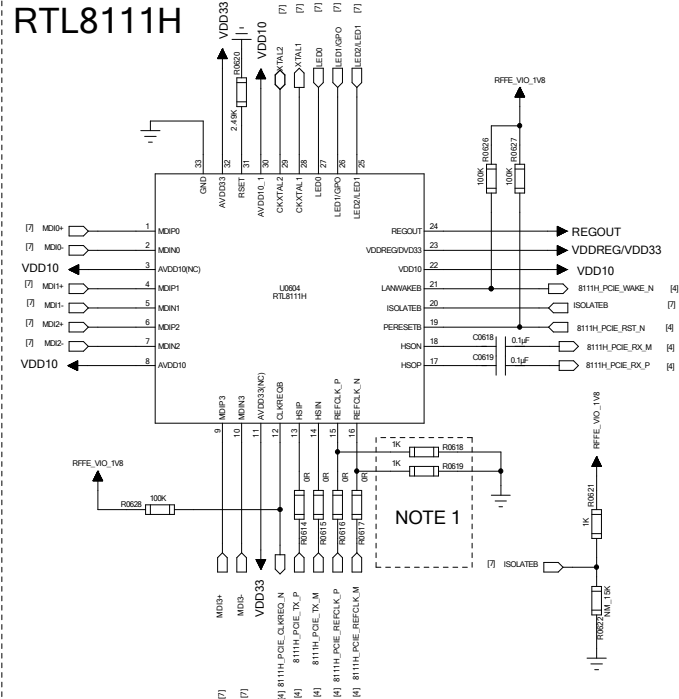

NOTE:


1. The PCIe reference clock pins of RTL8111H must be pulled down with R0618 and R0619 resistors.
 2. For a device with 1.8 V power domain, RFFE_VIO_1V8 can be used as the pull-up power supply.
- For a device with 3.3 V power domain, RFFE_VIO_1V8 should control whether to enable the 3.3 V power supply.

Quectel Wireless Solutions

DRAWN BY Len CHEN	PROJECT RM500U Series	TITLE Reference Design
CHECKED BY King MA	SIZE A2	VER 1.1
SHEET 7 / 9		DATE 2023/8/31

SLIC Solution 1


SLIC

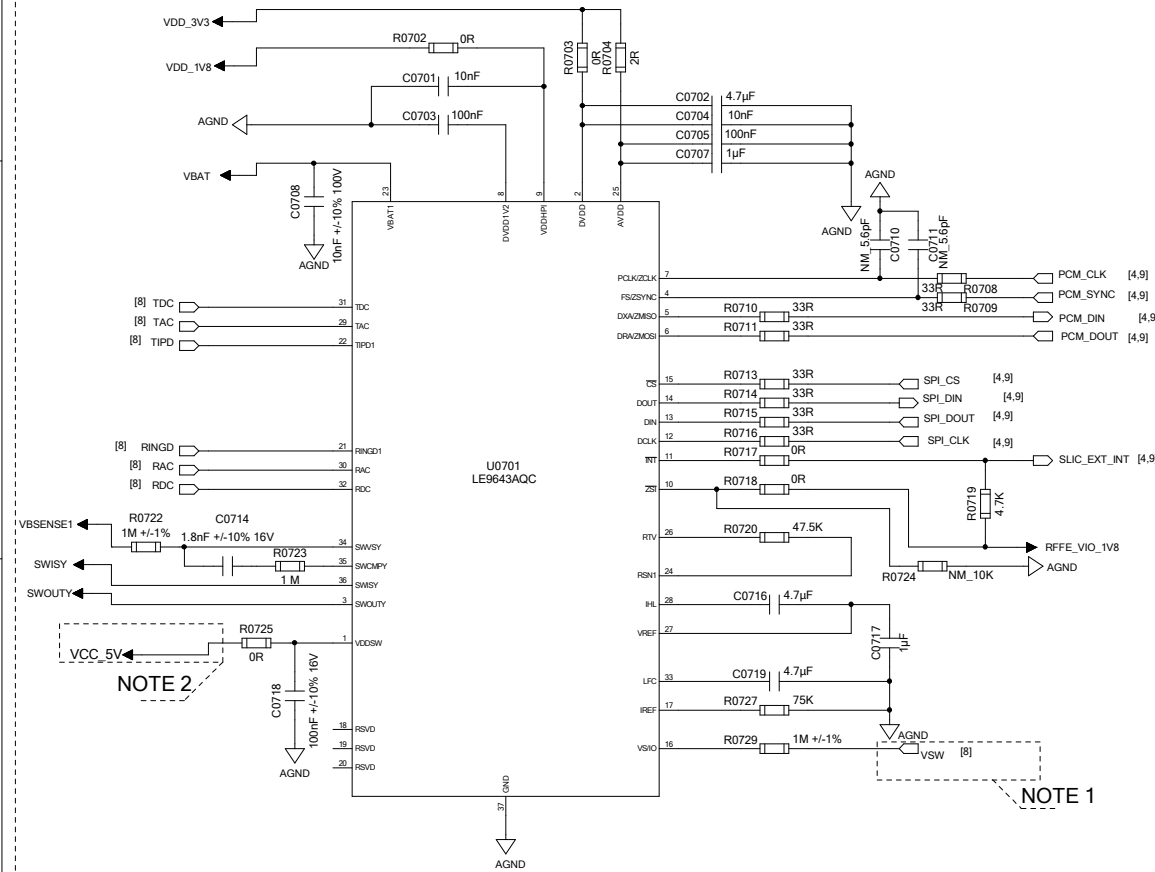


Power Connector



High Voltage Ringing SLIC Protector

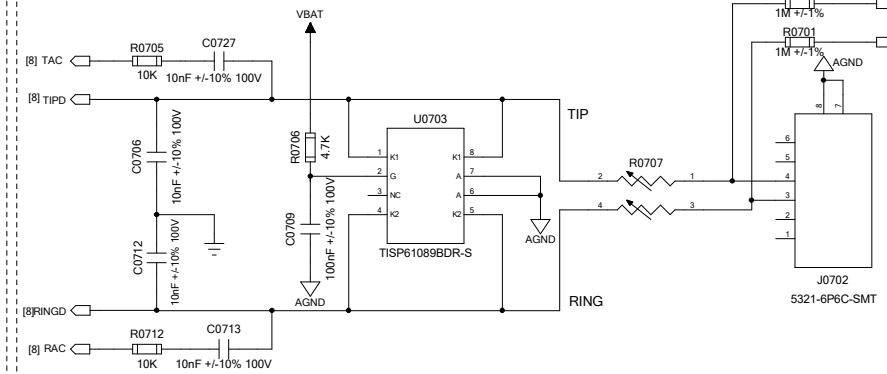

DC-DC Converter

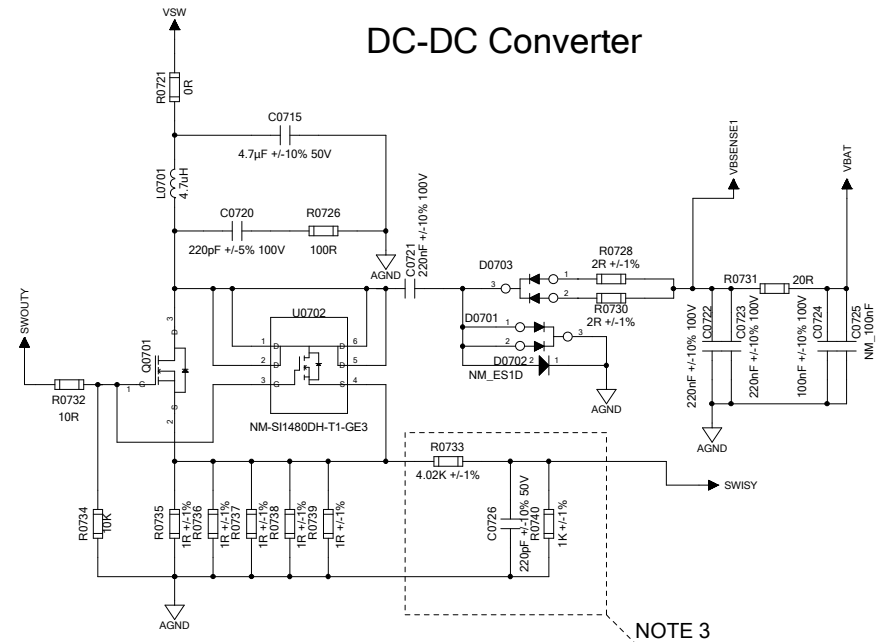

NOTE:


1. The VSW input voltage range is 10-14 V.
2. VDDSW voltage is +5 V $\pm$ 5 %, and the absolute maximum voltage is +5.5 V.
3. The current detection circuit needs to be placed close to the SLIC chip.
4. It is required to confirm the applicability and price from the supplier about the IC involved in the reference design.

Quectel Wireless Solutions


DRAWN BY Len CHEN	PROJECT RM500U Series	TITLE Reference Design
CHECKED BY King MA	SIZE A2	VER 1.1
SHEET 8 / 9		DATE 2023/8/31

SLIC Solution 2


SLIC

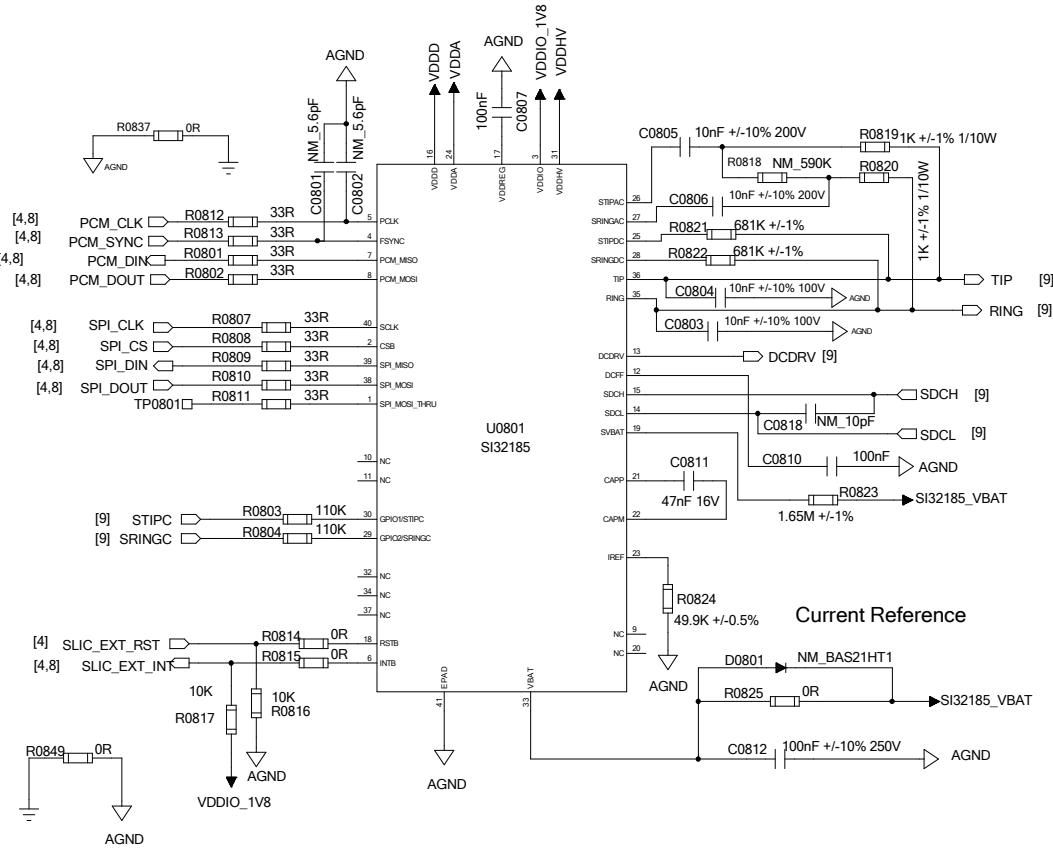


High Voltage Ringing SLIC Protector

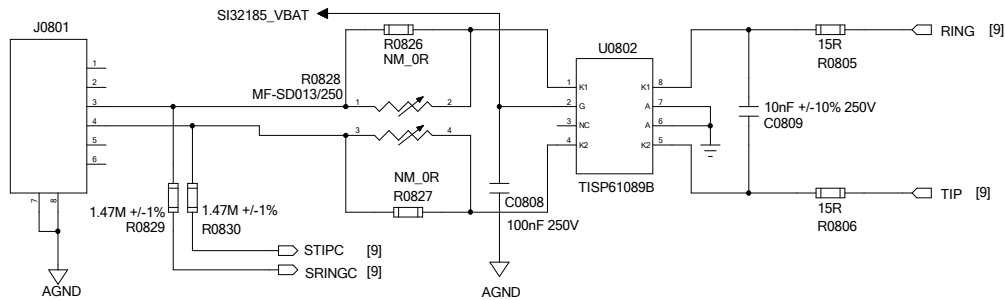

Power

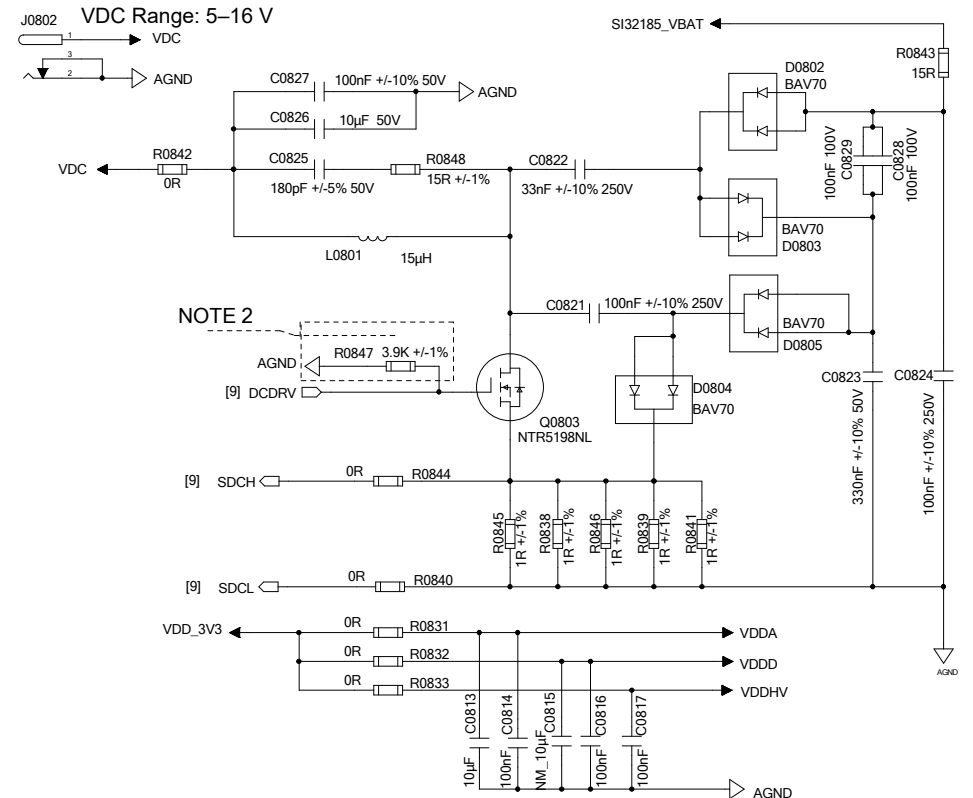

NOTE 2



NOTE:

- Ensure VDDIO supply powers up after the VDDD supply if VDDIO is not connected to VDDD or VDDREG.
- R0847 must be reserved to protect Q0803 from damage.

Quectel Wireless Solutions

DRAWN BY Len CHEN	PROJECT RM500U Series	TITLE Reference Design
CHECKED BY King MA	SIZE A2	VER 1.1
SHEET 9 / 9	DATE 2023/8/31	