



BobSim

ISO4138 Vehicle Characterization

OpenModelica Executable with Curvature Feedforward and PI Trim



Generated: 2026-05-11 20:14

BobDyn



-
- ISO4138 steady-state circular test performed
 - Constant velocity maintained at 15 m/s
 - Radius sweep from 12.5 m to 100 m
 - Tire model: MF52

Metric	Value	Units
a_y Range	$-17.99 \rightarrow 17.99$	m/s^2
Roadwheel Understeer Gradient	0.00726	$\frac{\text{rad}}{\text{m/s}^2}$
Handwheel Understeer Gradient	4.08	$\frac{\text{deg}}{g}$
	0.02987	$\frac{\text{rad}}{\text{m/s}^2}$
Roll Gradient	16.79	$\frac{\text{deg}}{g}$
	1.248	$\frac{\text{deg}}{g}$
Max Radius Error	1.01	%

Steering Angle vs a_y

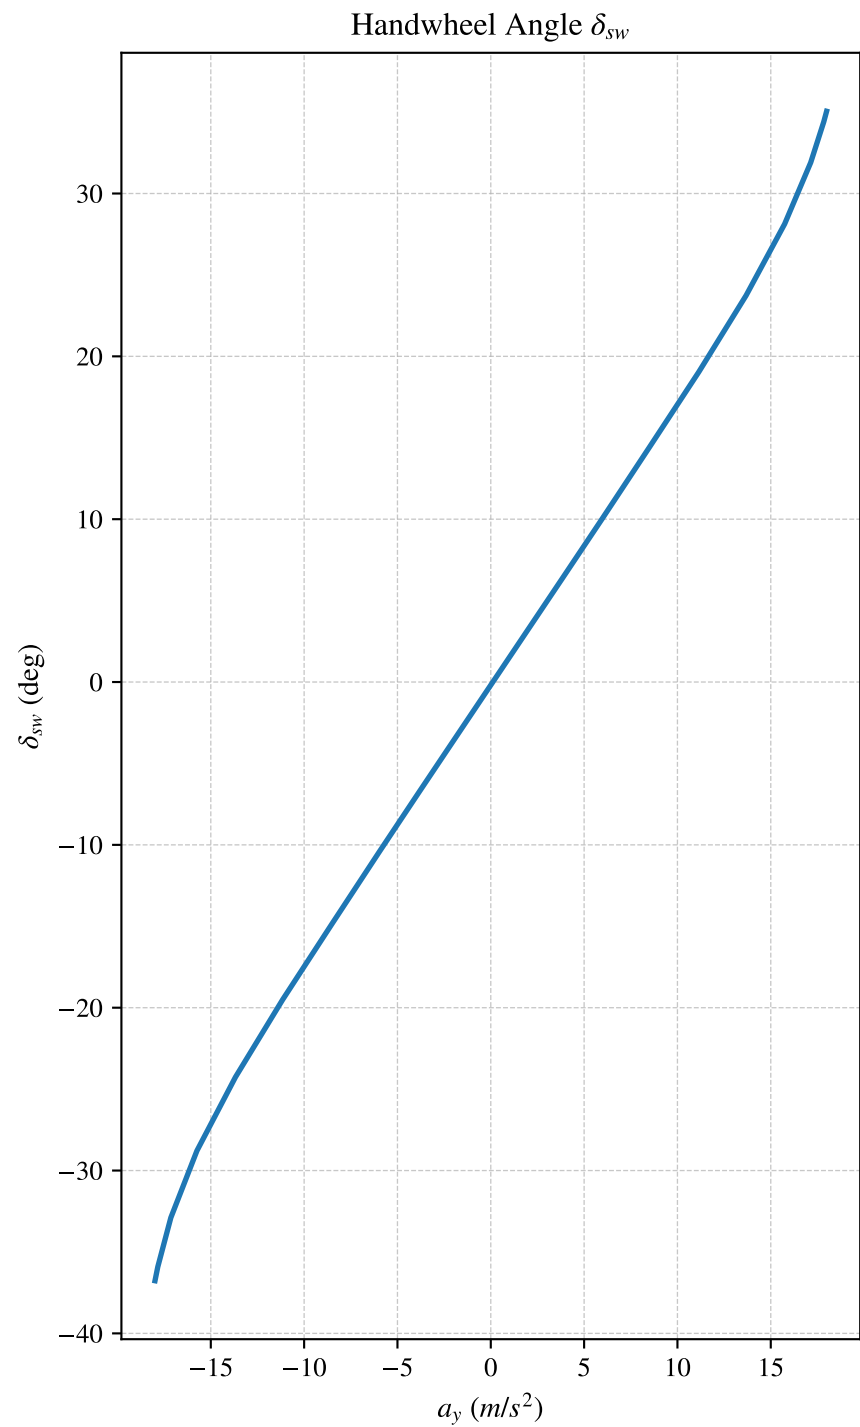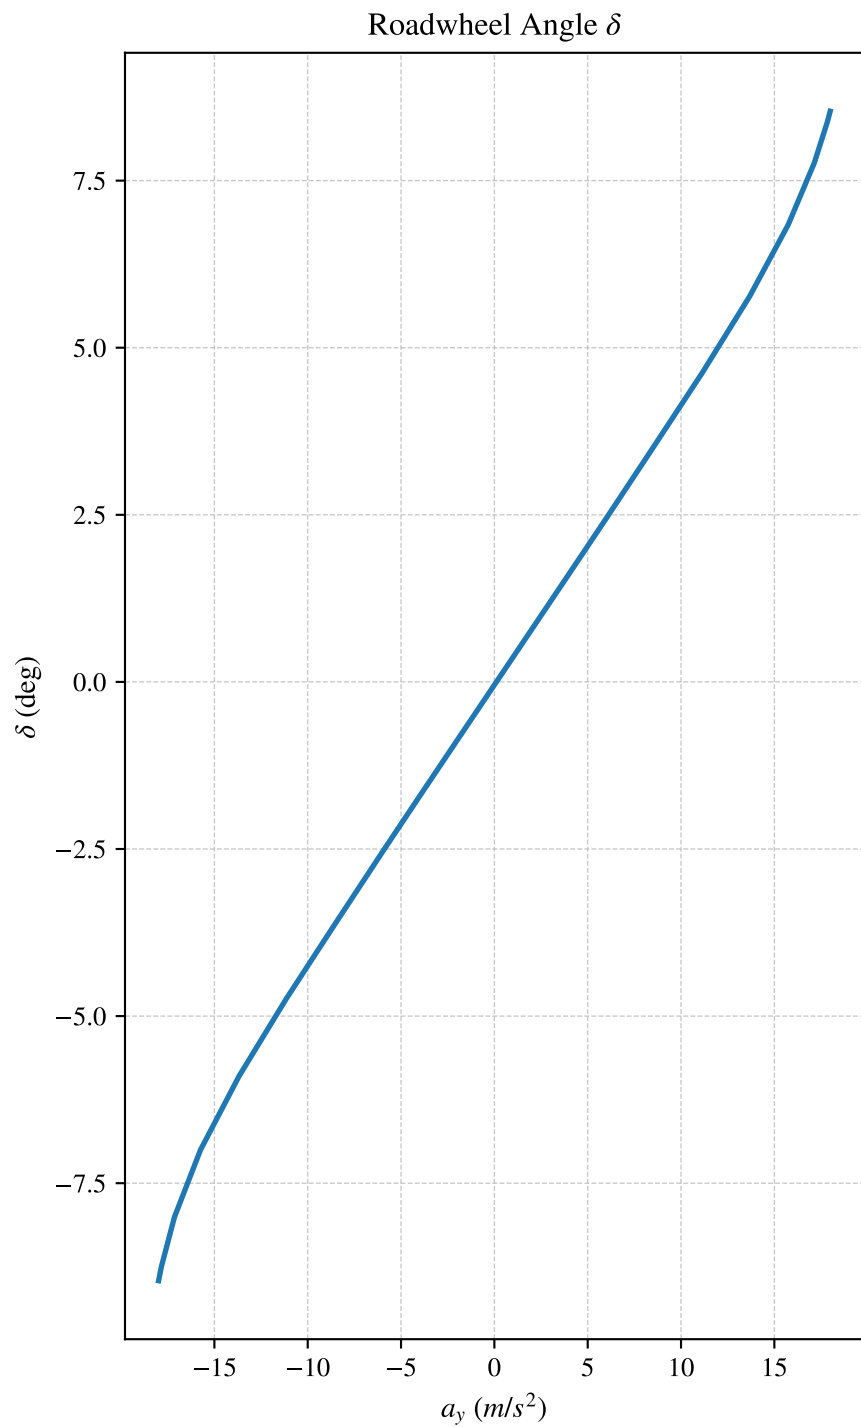


Tracking Error vs Analytical a_y

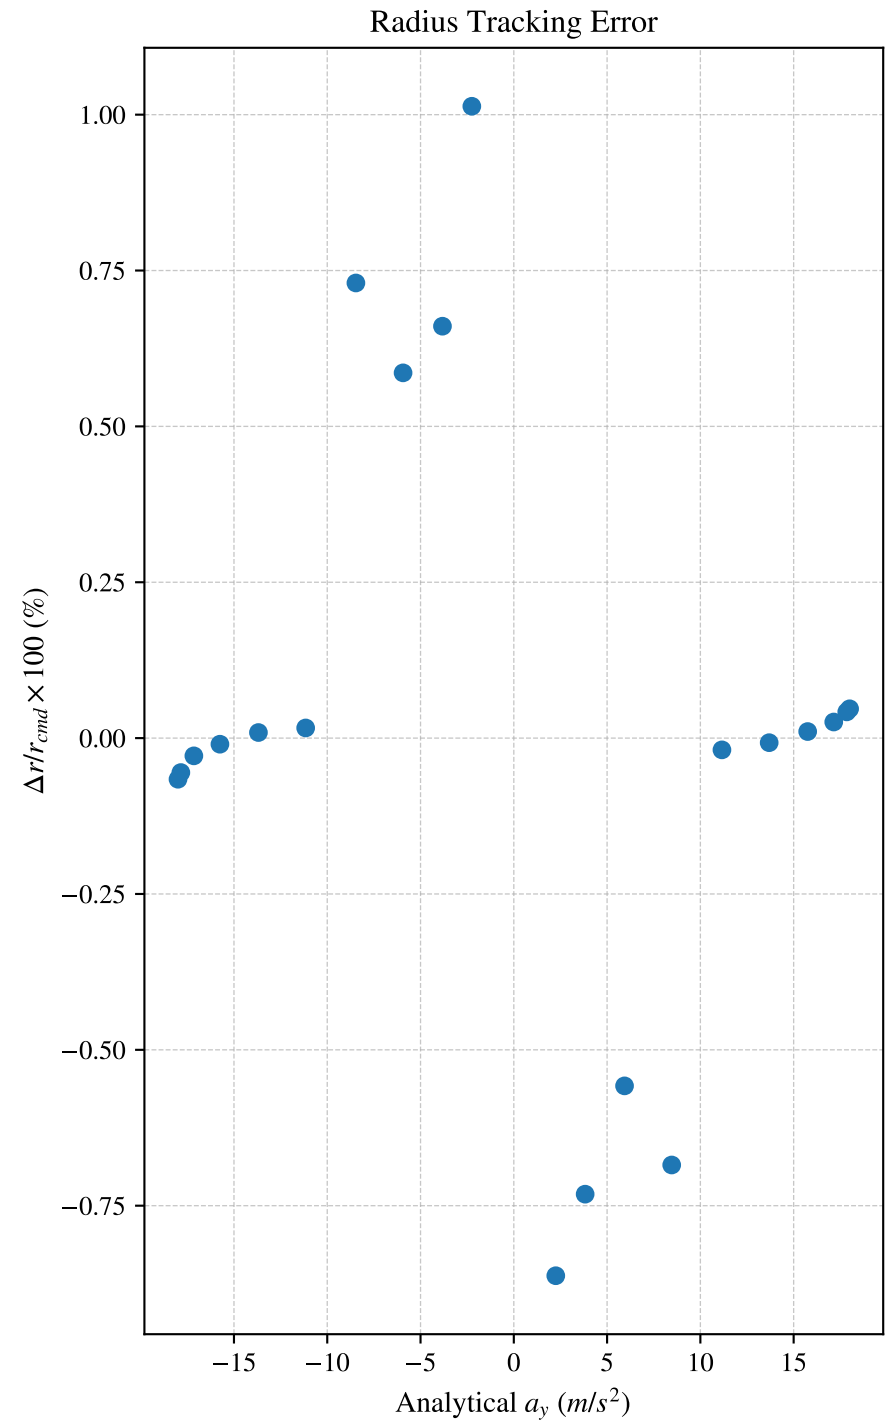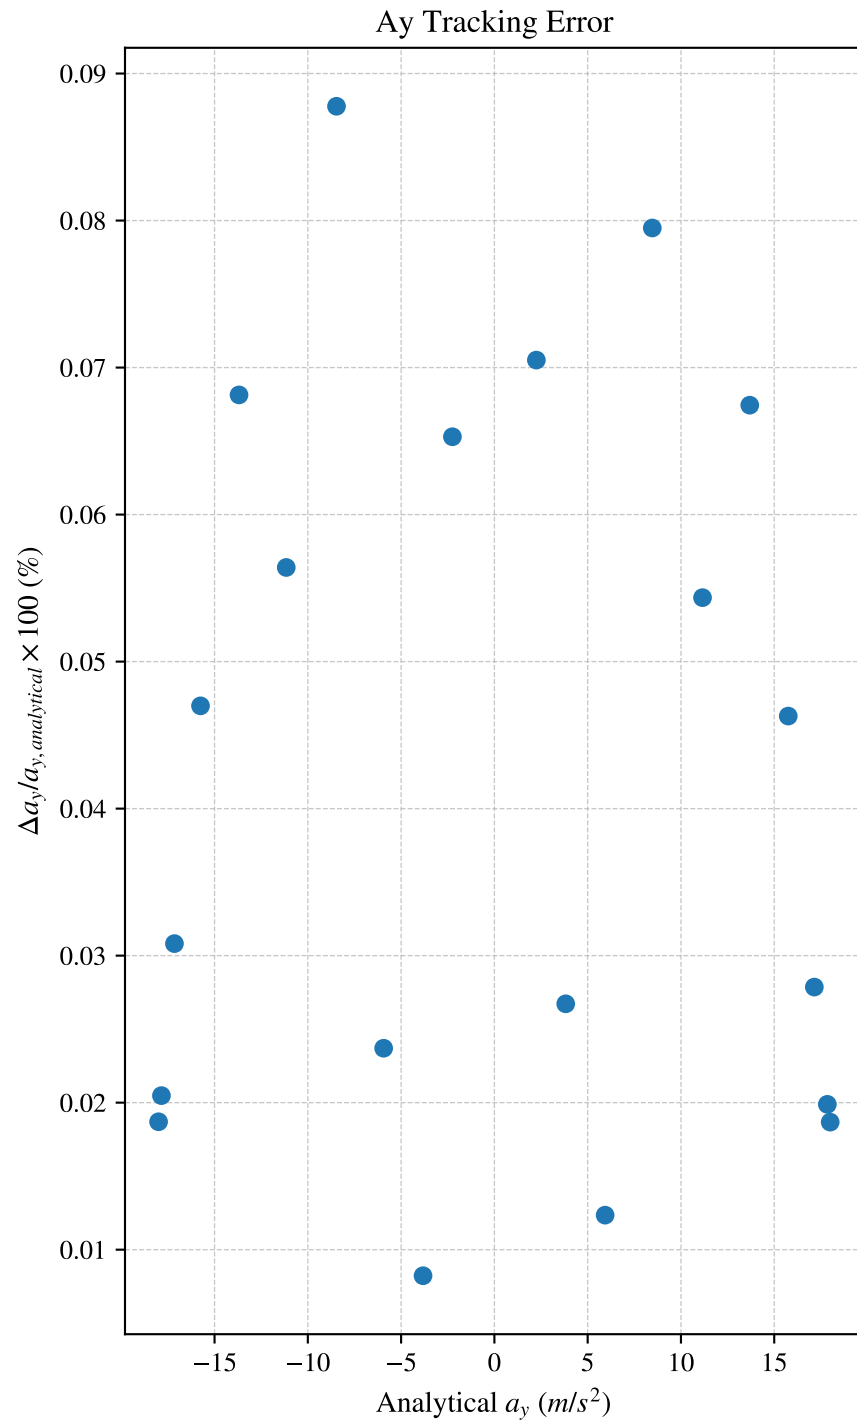


Vehicle States vs a_y


Curvature κ

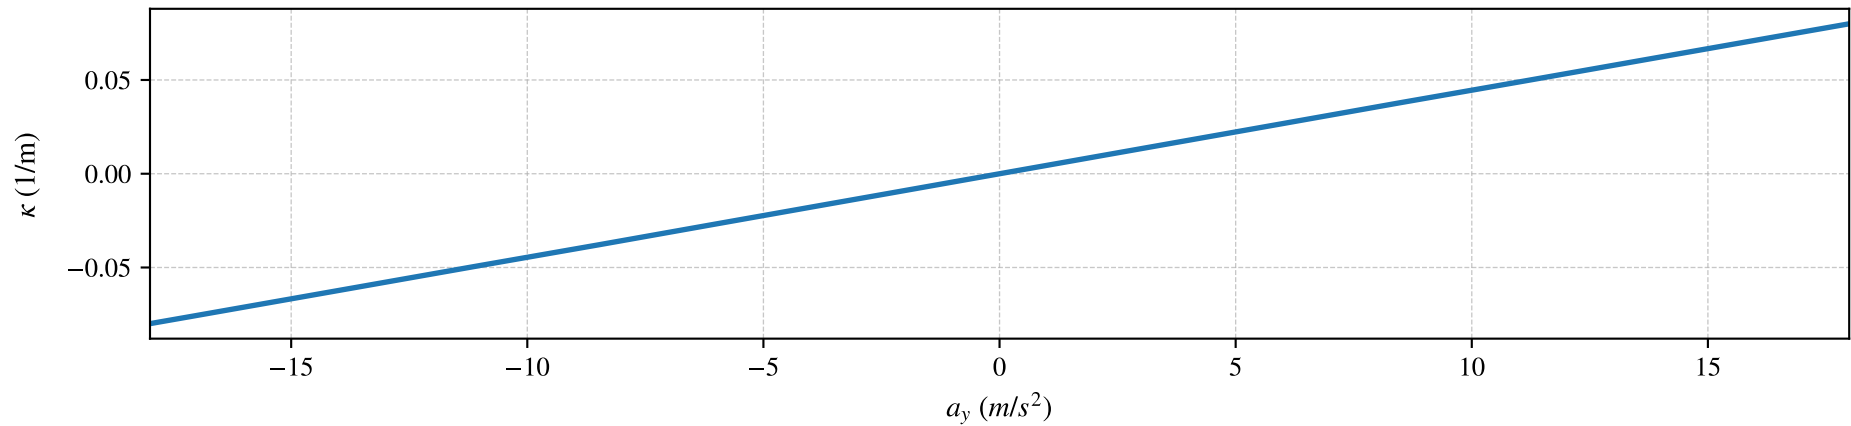




Roll Angle ϕ

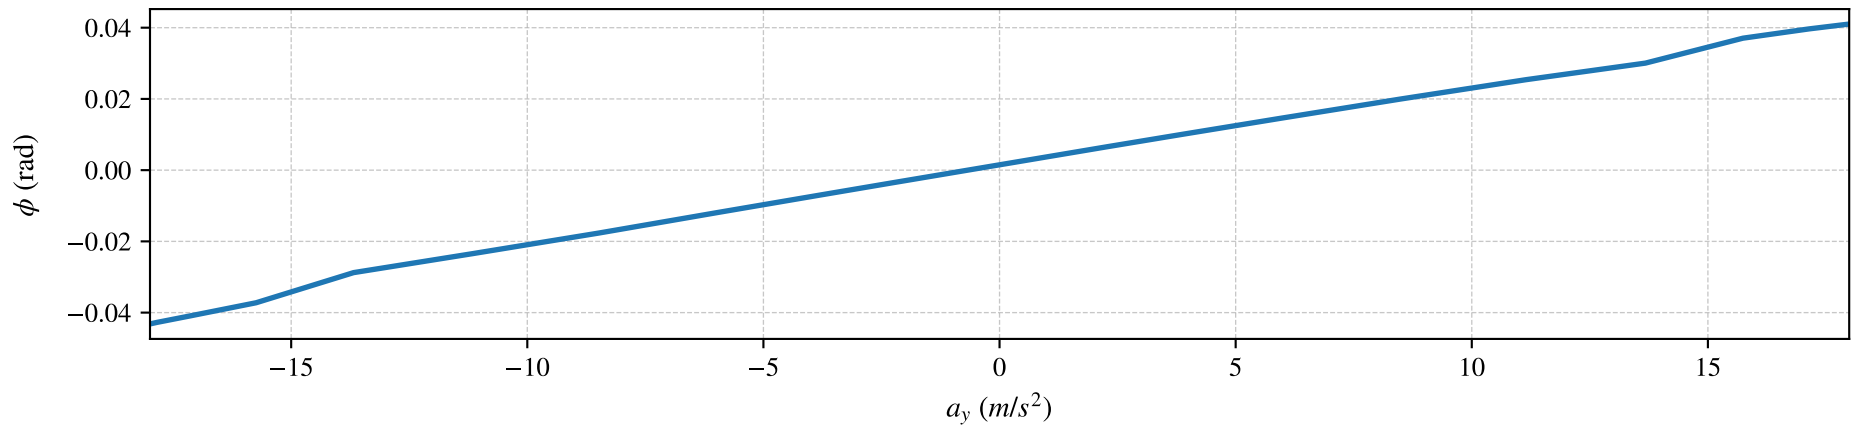

Sideslip β

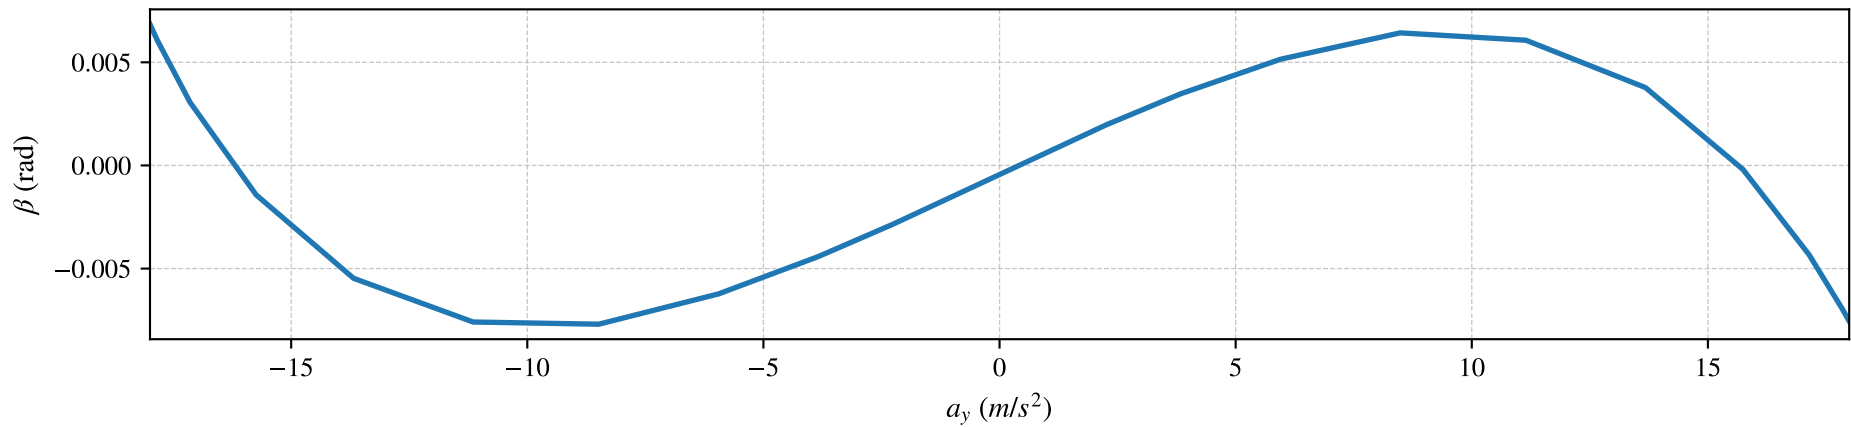

Response Sensitivities vs a_y

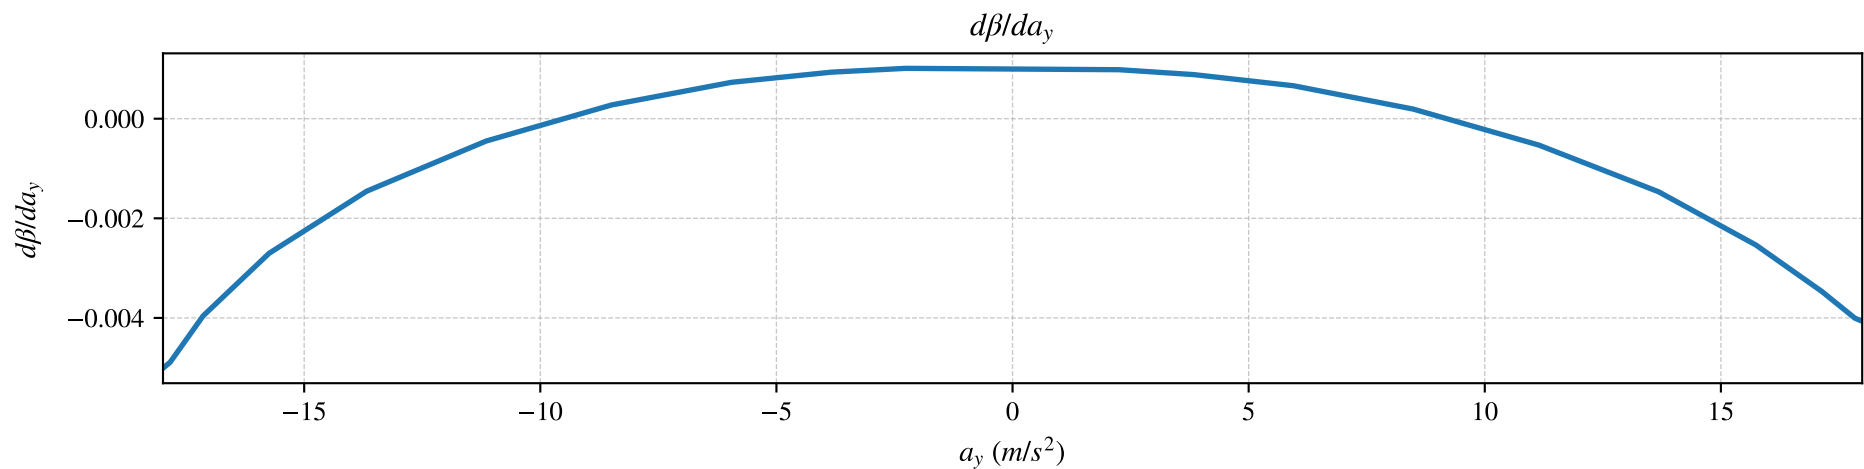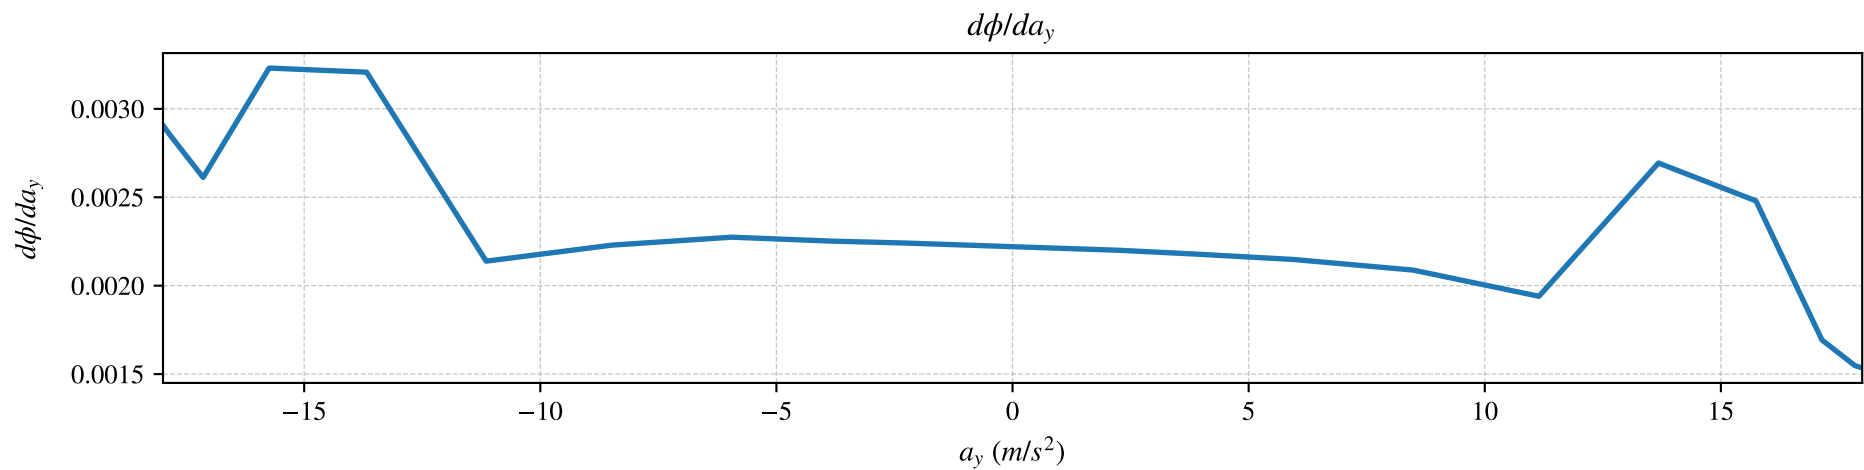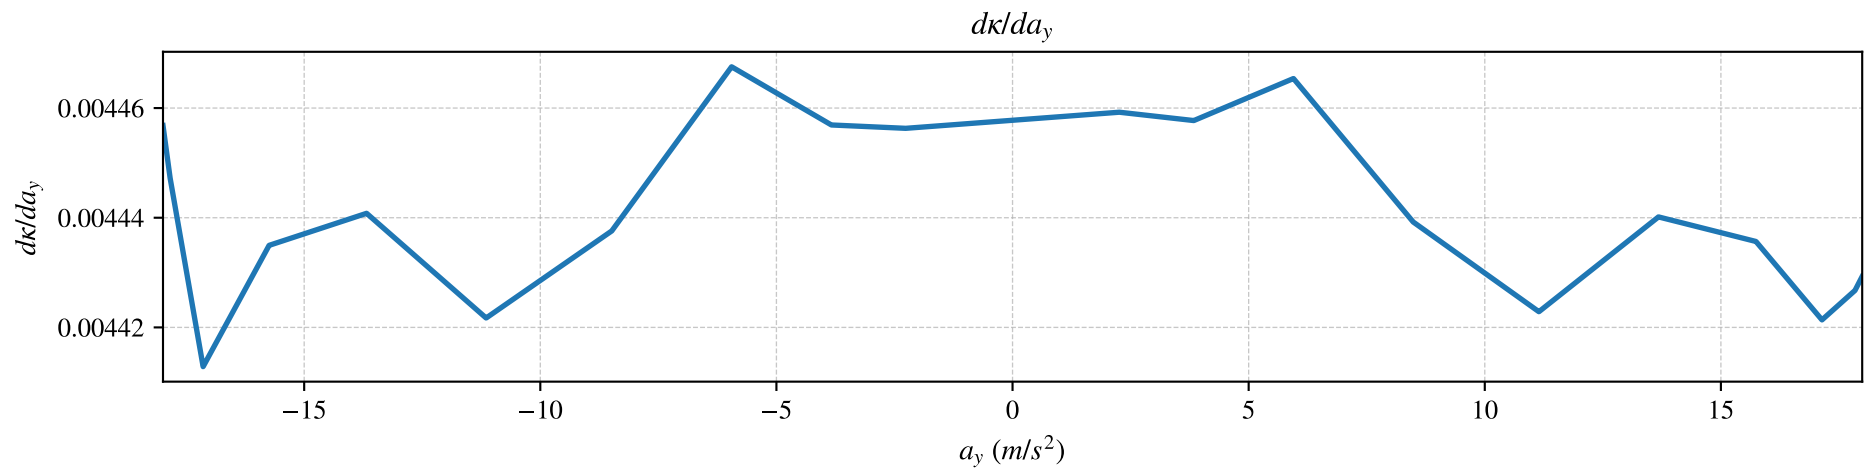

Steering Effort vs a_y

