

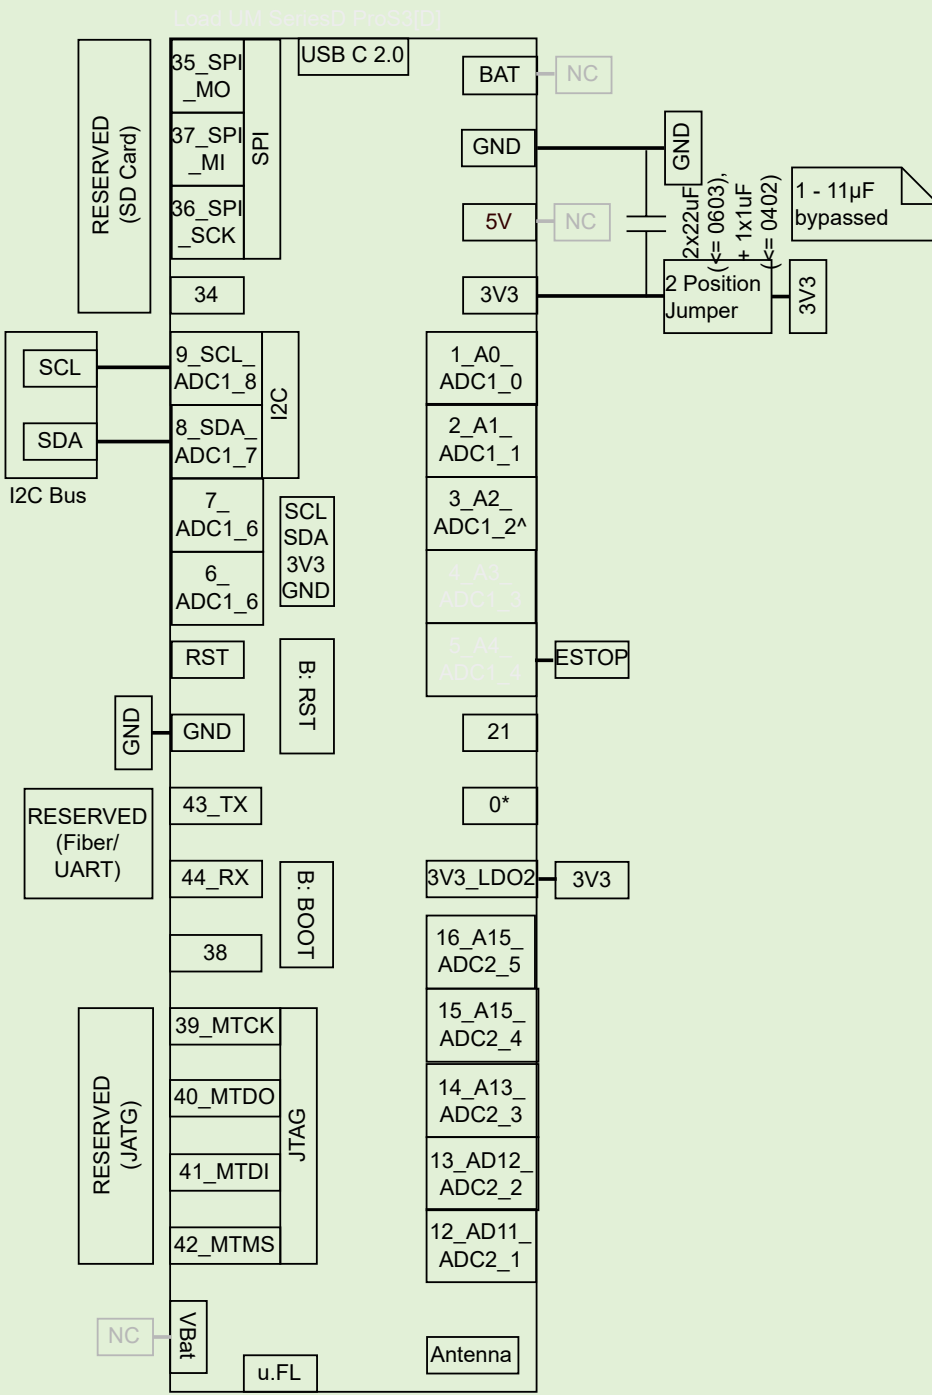




Boot Mode Strapping  
^ Boot JTAG Control (DFLT: No Effect)

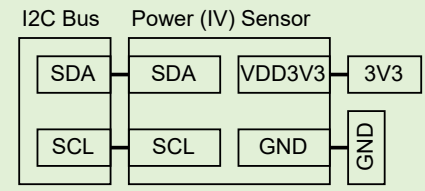

### Interfaces, excluding most power

#### Common

- I2C (Bus)
- JTAG (Header)
  - MTDO
  - MTCK
  - MTDI
  - MTMS
- Reset\* (Header) (Normally Open)
  - En
  - GND
- Storage\* (Future Expansion) (Header)
  - DO (MSIO)
  - Vss2 (GND)
  - SCK (SCLK)
  - VDD (3V3)
  - Vss1 (GND)
  - DI (MOSI)
  - CS (SS)

Alternatively, the ESP32-S3 Supports SDIO, which uses six data pins

#### Load

- Power (V/I/P) Sensor (Header?)
  - I2C: SDA
  - I2C: SCL
  - Optional: Alert
- ESTOP (Normally Closed) (Pullup)
- Load
  - I2C: SDA
  - I2C: SCL

- Pin numbers are ESP32 GPIO numbers, not board pins or Arduino pins.  
 - No pin shown: Assume No board connection (NC) (outside of general debug headers)  
 - All I2C devices can share the same bus if they behave nicely, but otherwise there is a spare bus.  
 - All pins should have a total of two - three female headers available for debugging and modifications, including any stacking headers.