



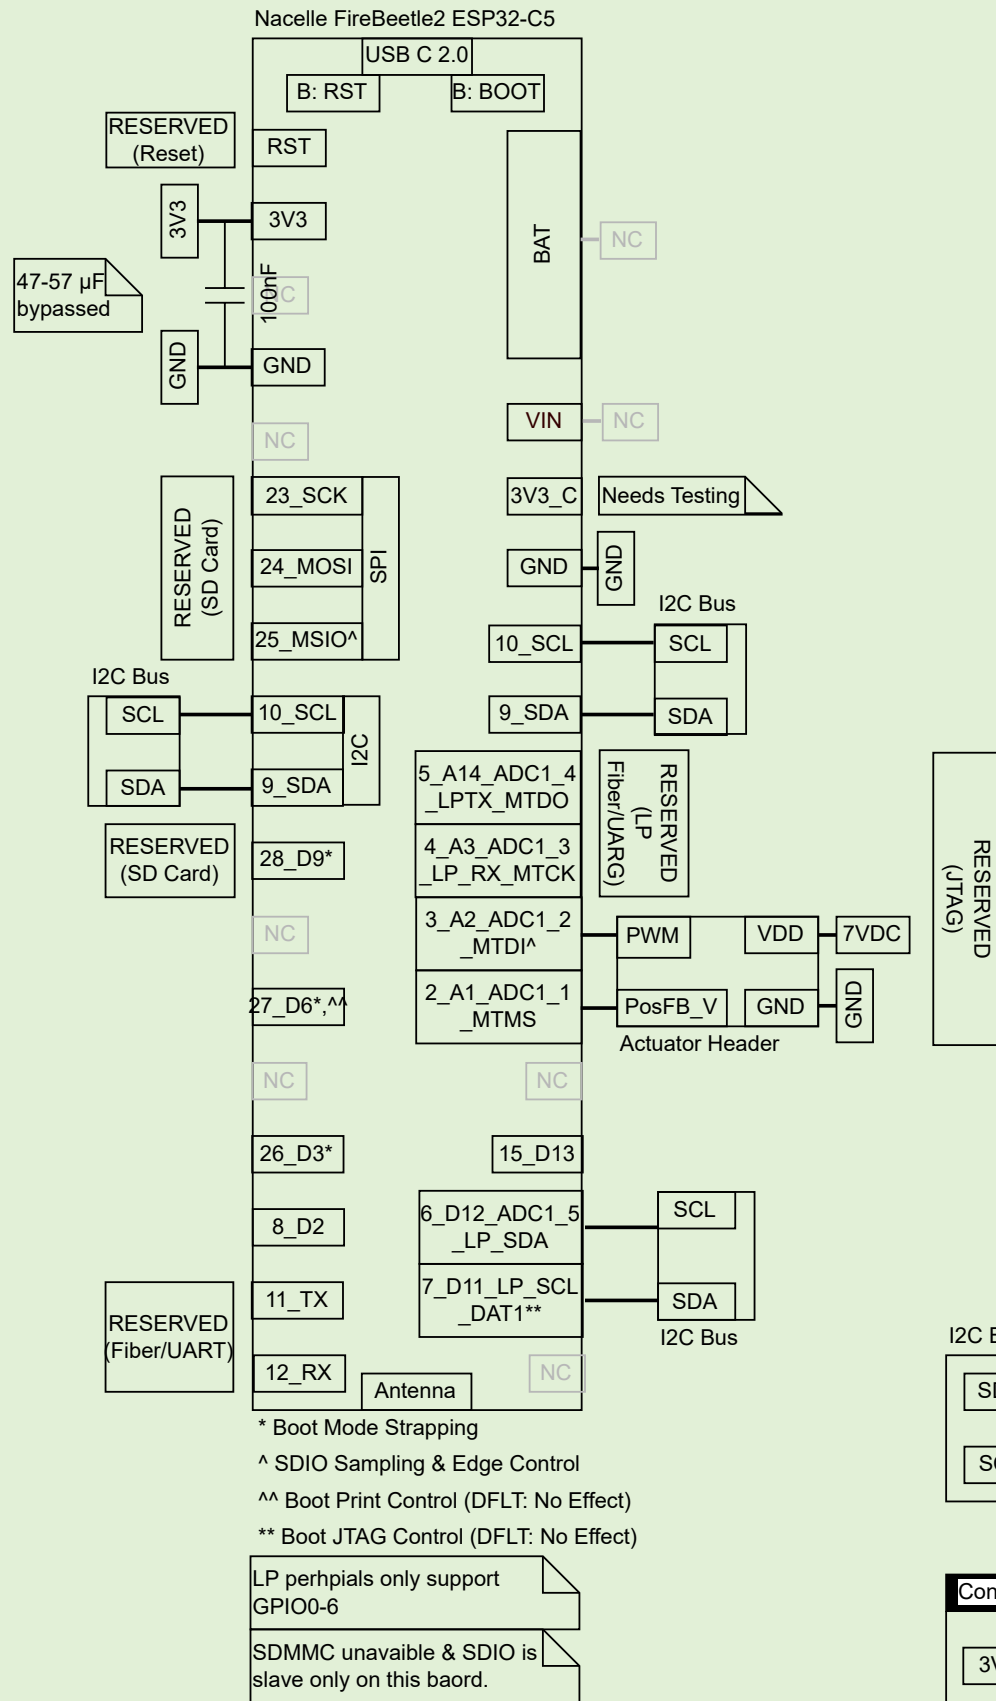


* Boot Mode Strapping
^ SDIO Sampling & Edge Control
^^ Boot Print Control (DFLT: No Effect)
** Boot JTAG Control (DFLT: No Effect)

LP perhpials only support GPIO0-6

SDMMC unavaible & SDIO is slave only on this baord.

Interfaces, excluding most power	
Common	
- I2C (Bus)	
Debug and Testing*	
- JTAG (Header)	
- MTDO	
- MTCK	
- MTDI	
- MTMS	
- Reset* (Header) (Normally Open)	
- En	
- GND	
- Storage* (Future Expansion) (Header)	
- DO (MSIO)	
- Vss2 (GND)	
- SCK (SCLK)	
- VDD (3V3)	
- Vss1 (GND)	
- DI (MOSI)	
- CS (SS)	
Nacele	
- Encoder	
- I2C: SDA	
- I2C: SCL	
- Actuator	
- Analog Feedback	
- PWM	

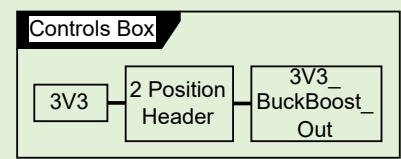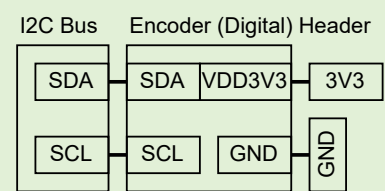

- Pin numbers are ESP32 GPIO numbers, not board pins or Arduino pins.
- No pin shown: Assume No board connection (NC) (outside of general debug headers).
- All I2C devices can share the same bus if they behave nicely, but otherwise there is a spare bus.
- All pins should have a total of two - three female headers available for debugging and modifications, including any stacking headers.