



Load UM SeriesD ProS3[D]

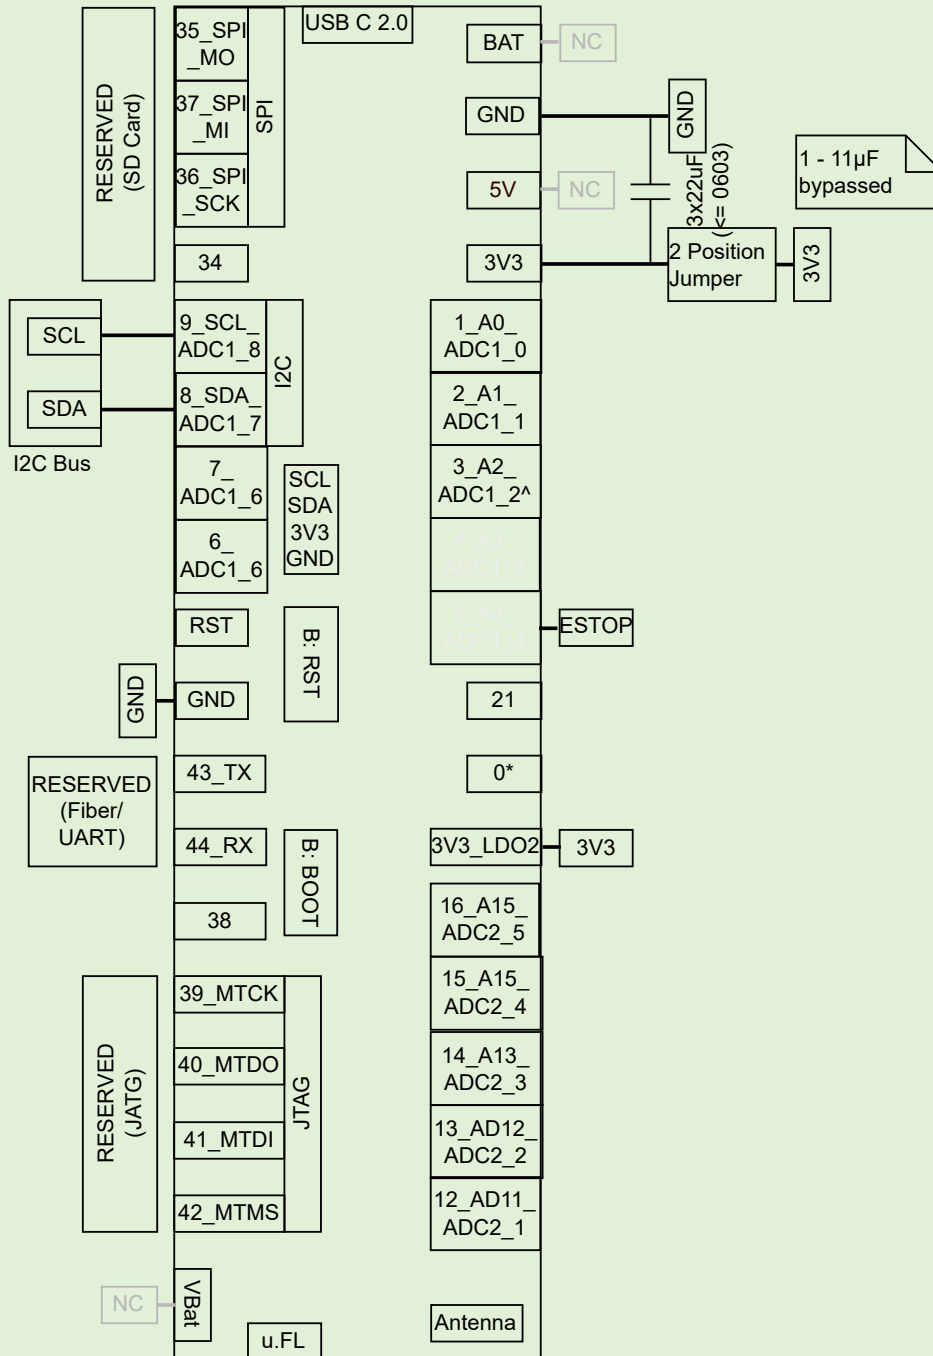


* Boot Mode Strapping

^ Boot JTAG Control (DELT: No Effect)

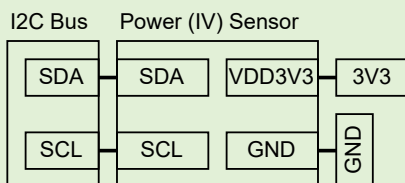

ESTOP Header



Interfaces, excluding most power

Common

- I2C (Bus)
- Debug and Testing***
- JTAG (Header)
 - MTDO
 - MTCK
 - MTDI
 - MTMS
- Reset* (Header) (Normally Open)
 - En
 - GND
- Storage* (Future Expansion) (Header)
 - DO (MSIO)
 - Vss2 (GND)
 - SCK (SCLK)
 - VDD (3V3)
 - Vss1 (GND)
 - DI (MOSI)
 - CS (SS)

Alternatively, the ESP32-S3 Supports SDIO, which uses six data pins

Load

- Power (V/I/P) Sensor (Header?)
 - I2C: SDA
 - I2C: SCL
 - Optional: Alert
- ESTOP (Normally Closed) (Pullup)
- Load
 - I2C: SDA
 - I2C: SCL

- Pin numbers are ESP32 GPIO numbers, not board pins or Arduino pins.
- No pin shown: Assume No board connection (NC) (outside of general debug headers)
- All I2C devices can share the same bus if they behave nicely, but otherwise there is a spare bus.
- All pins should have a total of two - three female headers available for debugging and modifications, including any stacking headers.