


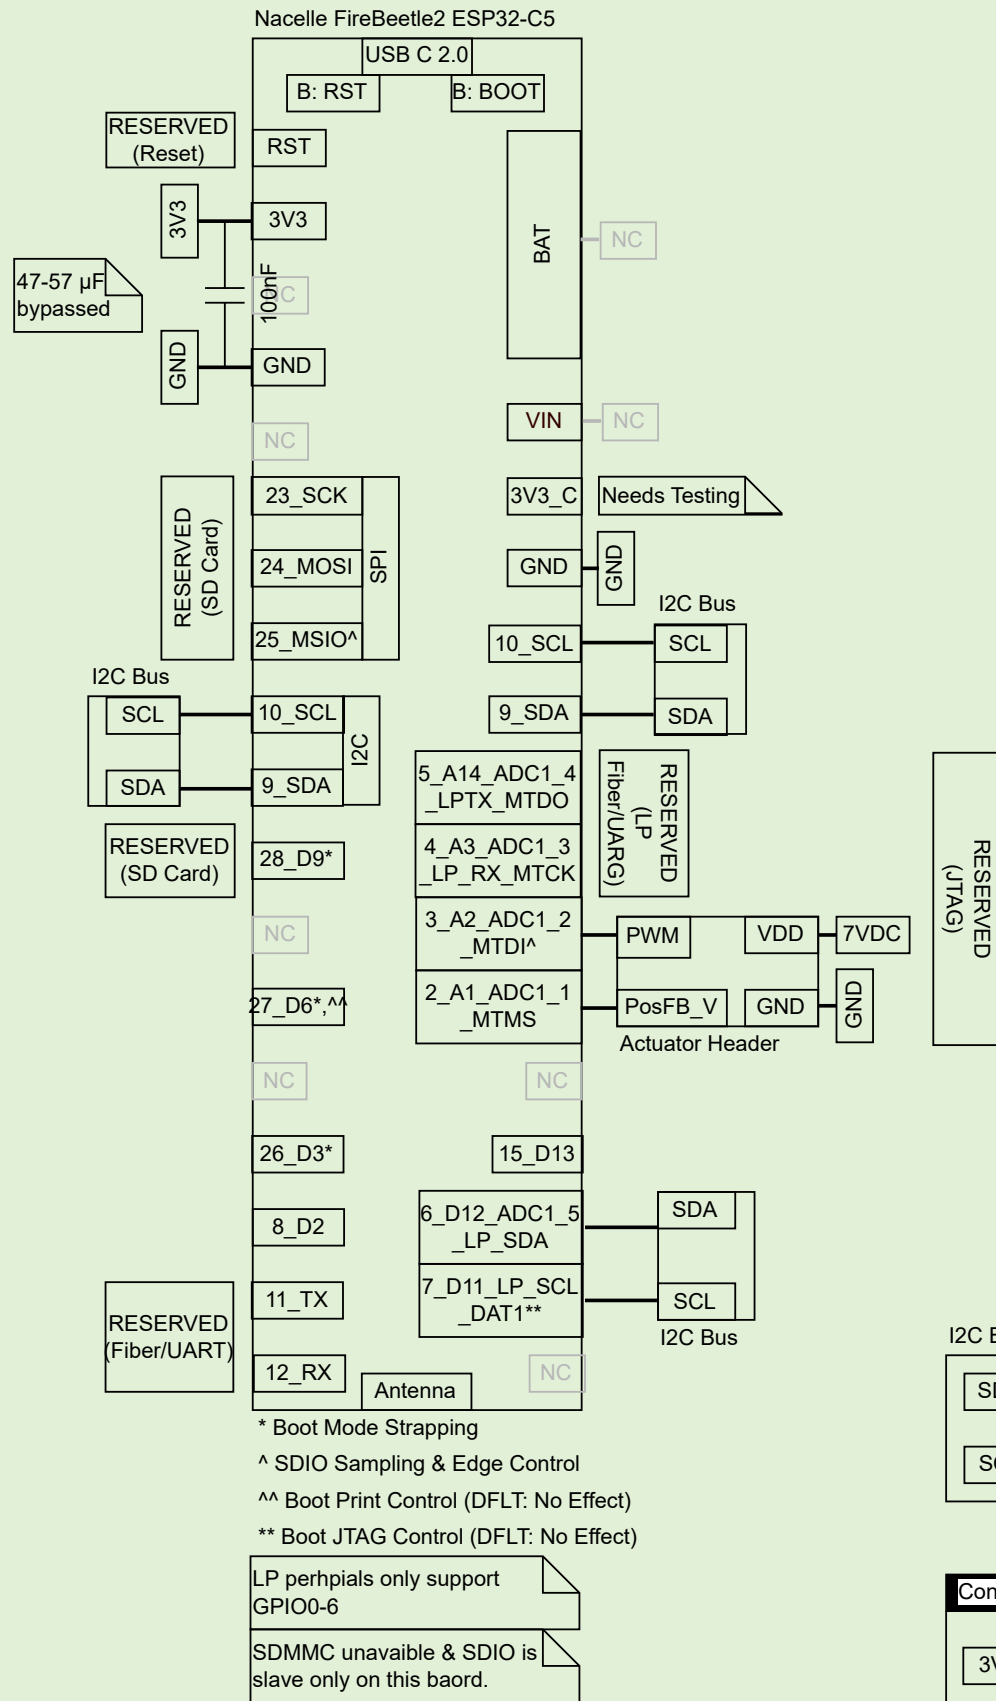

* Boot Mode Strapping
^ SDIO Sampling & Edge Control
^^ Boot Print Control (DFLT: No Effect)
** Boot JTAG Control (DFLT: No Effect)

LP perhpials only support GPIO0-6

SDMMC unavaible & SDIO is slave only on this baord.

Interfaces, excluding most power

Common



- I2C (Bus)

Debug and Testing*

- JTAG (Header)
- MTDO
- MTCK
- MTDI
- MTMS
- Reset* (Header) (Normally Open)
- En
- GND
- Storage* (Future Expansion) (Header)
- DO (MSIO)
- Vss2 (GND)
- SCK (SCLK)
- VDD (3V3)
- Vss1 (GND)
- DI (MOSI)
- CS (SS)

Nacele

- Encoder
- I2C: SDA
- I2C: SCL
- Actuator
- Analog Feedback
- PWM

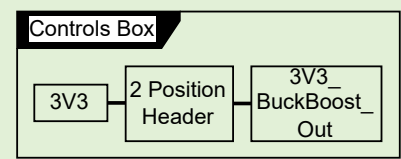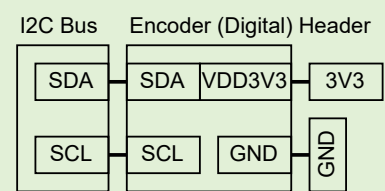

- Pin numbers are ESP32 GPIO numbers, not board pins or Arduino pins.
- No pin shown: Assume No board connection (NC) (outside of general debug headers).
- All I2C devices can share the same bus if they behave nicely, but otherwise there is a spare bus.
- All pins should have a total of two - three female headers available for debugging and modifications, including any stacking headers.