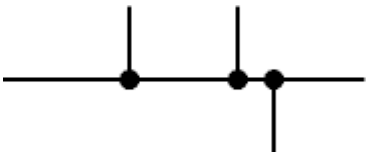
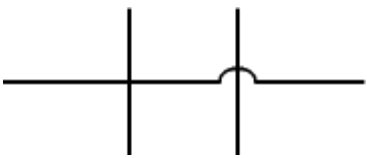


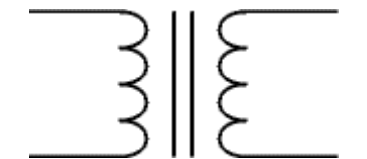

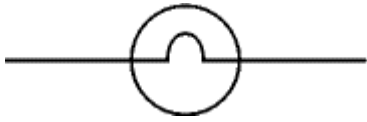
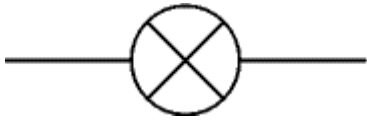

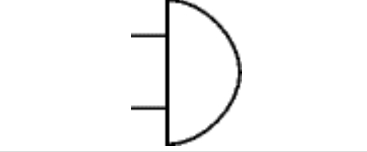


Wires and connections		
Component	Circuit Symbol	Function of Component
Wire		To pass current very easily from one part of a circuit to another.
Wires joined		A 'blob' should be drawn where wires are connected (joined), but it is sometimes omitted. Wires connected at 'crossroads' should be staggered slightly to form two T-junctions, as shown on the right.
Wires not joined		In complex diagrams it is often necessary to draw wires crossing even though they are not connected. I prefer the 'hump' symbol shown on the right because the simple crossing on the left may be misread as a join where you have forgotten to add a 'blob'!

Power Supplies		
Component	Circuit Symbol	Function of Component
Cell		Supplies electrical energy. A single cell is often wrongly called a battery, but strictly a battery is two or more cells joined together.
Battery		Supplies electrical energy. A battery is more than one cell.
DC supply		Supplies electrical energy. DC = Direct Current, always flowing in one direction.
AC supply		Supplies electrical energy. AC = Alternating Current, continually changing direction.
Fuse		A safety device which will 'blow' (melt) if the current flowing through it exceeds a specified value.
<u>Transformer</u>		Two coils of wire linked by an iron core. Transformers are used to step up (increase) and step down (decrease) AC voltages. Energy is transferred between the coils by the magnetic field in the core. There is no electrical connection between the coils.
Earth		A connection to earth. For many electronic circuits this is the 0V (zero volts) of the power supply, but for mains electricity and

(Ground)		some radio circuits it really means the earth. It is also known as ground.
----------	---	--

Output Devices: Lamps, Heater, Motor, etc.		
Component	Circuit Symbol	Function of Component
<u>Lamp (lighting)</u>		A transducer which converts electrical energy to light. This symbol is used for a lamp providing illumination, for example a car headlamp or torch bulb.
<u>Lamp (indicator)</u>		A transducer which converts electrical energy to light. This symbol is used for a lamp which is an indicator, for example a warning light on a car dashboard.
Heater		A transducer which converts electrical energy to heat.
Motor		A transducer which converts electrical energy to kinetic energy (motion).
Bell		A transducer which converts electrical energy to sound.
<u>Buzzer</u>		A transducer which converts electrical energy to sound.
<u>Inductor</u> (Coil, Solenoid)		A coil of wire which creates a magnetic field when current passes through it. It may have an iron core inside the coil. It can be used as a transducer converting electrical energy to mechanical energy by pulling on something.

Obs! Microsoft ansvarar inte för innehållet i denna grupp. [Klicka här om du vill ha mer information](#)