



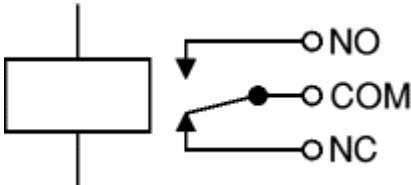







Switches		
Component	Circuit Symbol	Function of Component
<u>Push Switch</u> (push-to-make)		A push switch allows current to flow only when the button is pressed. This is the switch used to operate a doorbell.
<u>Push-to-Break Switch</u>		This type of push switch is normally closed (on), it is open (off) only when the button is pressed.
<u>On-Off Switch</u> (SPST)		SPST = Single Pole, Single Throw. An on-off switch allows current to flow only when it is in the closed (on) position.
<u>2-way Switch</u> (SPDT)		SPDT = Single Pole, Double Throw. A 2-way changeover switch directs the flow of current to one of two routes according to its position. Some SPDT switches have a central off position and are described as 'on-off-on'.
<u>Dual On-Off Switch</u> (DPST)		DPST = Double Pole, Single Throw. A dual on-off switch which is often used to switch mains electricity because it can isolate both the live and neutral connections.
<u>Reversing Switch</u> (DPDT)		DPDT = Double Pole, Double Throw. This switch can be wired up as a reversing switch for a motor. Some DPDT switches have a central off position.
<u>Relay</u>		An electrically operated switch, for example a 9V battery circuit connected to the coil can switch a 230V AC mains circuit. NO = Normally Open, COM = Common, NC = Normally Closed.

Resistors		
Component	Circuit Symbol	Function of Component
<u>Resistor</u>		A resistor restricts the flow of current, for example to limit the current passing through an LED. A resistor is used with a capacitor in a timing circuit.
		This type of variable resistor with 2 contacts

<u>Variable Resistor (Rheostat)</u>		(a rheostat) is usually used to control current. Examples include: adjusting lamp brightness, adjusting motor speed, and adjusting the rate of flow of charge into a capacitor in a timing circuit.
<u>Variable Resistor (Potentiometer)</u>		This type of variable resistor with 3 contacts (a potentiometer) is usually used to control voltage. It can be used like this as a transducer converting position (angle of the control spindle) to an electrical signal.
<u>Variable Resistor (Preset)</u>		This type of variable resistor (a preset) is operated with a small screwdriver or similar tool. It is designed to be set when the circuit is made and then left without further adjustment. Presets are cheaper than normal variable resistors so they are often used in projects to reduce the cost.

Capacitors		
Component	Circuit Symbol	Function of Component
<u>Capacitor</u>		A capacitor stores electric charge. A capacitor is used with a resistor in a timing circuit. It can also be used as a filter, to block DC signals but pass AC signals.
<u>Capacitor, polarised</u>		A capacitor stores electric charge. This type must be connected the correct way round. A capacitor is used with a resistor in a timing circuit. It can also be used as a filter, to block DC signals but pass AC signals.
<u>Variable Capacitor</u>		A variable capacitor is used in a radio tuner.
<u>Trimmer Capacitor</u>		This type of variable capacitor (a trimmer) is operated with a small screwdriver or similar tool. It is designed to be set when the circuit is made and then left without further adjustment.

Obs! Microsoft ansvarar inte för innehållet i denna grupp. [Klicka här om du vill ha mer information](#)