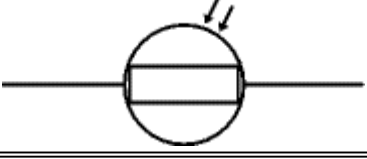

















Meters and Oscilloscope		
Component	Circuit Symbol	Function of Component
Voltmeter		A voltmeter is used to measure voltage. The proper name for voltage is 'potential difference', but most people prefer to say voltage!
Ammeter		An ammeter is used to measure current.
Galvanometer		A galvanometer is a very sensitive meter which is used to measure tiny currents, usually 1mA or less.
Ohmmeter		An ohmmeter is used to measure resistance. Most multimeters have an ohmmeter setting.
Oscilloscope		An oscilloscope is used to display the shape of electrical signals and it can be used to measure their voltage and time period.

Sensors (input devices)		
Component	Circuit Symbol	Function of Component
LDR		A transducer which converts brightness (light) to resistance (an electrical property). LDR = Light Dependent Resistor
Thermistor		A transducer which converts temperature (heat) to resistance (an electrical property).

Logic Gates			
Logic gates process signals which represent true (1, high, +Vs, on) or false (0, low, 0V, off). For more information please see the Logic Gates page. There are two sets of symbols: traditional and IEC (International Electrotechnical Commission).			
Gate Type	Traditional Symbol	IEC Symbol	Function of Gate
NOT			A NOT gate can only have one input. The 'o' on the output means 'not'. The output of a NOT gate is the inverse (opposite) of its input, so the output is true when the input is false. A NOT gate is also called an inverter.

<u>AND</u>			An AND gate can have two or more inputs. The output of an AND gate is true when all its inputs are true.
<u>NAND</u>			A NAND gate can have two or more inputs. The 'o' on the output means 'not' showing that it is a <u>Not AND</u> gate. The output of a NAND gate is true unless all its inputs are true.
<u>OR</u>			An OR gate can have two or more inputs. The output of an OR gate is true when at least one of its inputs is true.
<u>NOR</u>			A NOR gate can have two or more inputs. The 'o' on the output means 'not' showing that it is a <u>Not OR</u> gate. The output of a NOR gate is true when none of its inputs are true.
<u>EX-OR</u>			An EX-OR gate can only have two inputs. The output of an EX-OR gate is true when its inputs are different (one true, one false).
<u>EX-NOR</u>			An EX-NOR gate can only have two inputs. The 'o' on the output means 'not' showing that it is a <u>Not EX-OR</u> gate. The output of an EX-NOR gate is true when its inputs are the same (both true or both false).

Obs! Microsoft ansvarar inte för innehållet i denna grupp. [Klicka här om du vill ha mer information.](#)