


4.7 EXAMPLE 5

MIKROELEKTRONIKA

Using watch-dog timer

This example illustrates how the watch-dog timer should not be used. A command used for resetting this timer is intentionally left out in the main program loop, thus enabling it to win the time battle and cause the microcontroller to be reset. As a result, the microcontroller will be reset all the time, which is reflected as PORTB LED blinking.

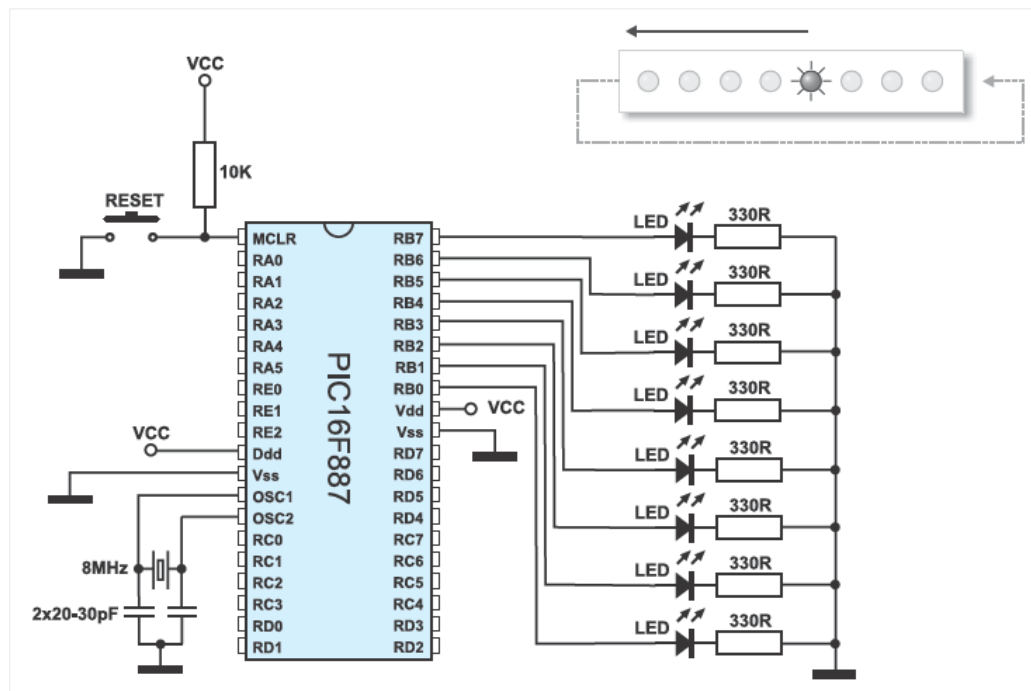


```

1  /*Header*****
2
3  void main() {
4      OPTION_REG = 0x0E; // Prescaler is assigned to timer WDT (1:64)
5
6      asm CLRWD; // Assembly command to reset WDT timer
7
8      PORTB = 0x0F; // Initial value of the PORTB register
9      TRISB = 0; // All port B pins are configured as outputs
10
11     Delay_ms(300); // 30mS delay
12     PORTB = 0xF0; // Porta B value different from initial
13
14     while (1); // Endless loop. Program remains here until WDT
15     // timer resets the microcontroller
16 }

```

In order to make this example work properly, it is necessary to enable the watchdog timer by selecting the **Watchdog Timer – Enabled option** in **mE programmer**.



4.7 Example 5 by MikroElektronika is licensed under a Creative Commons Attribution 4.0 International License, except where otherwise noted.