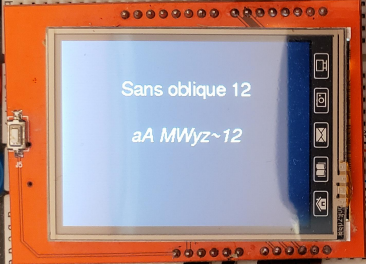
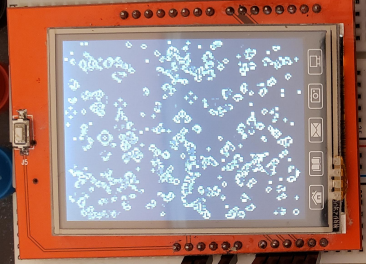

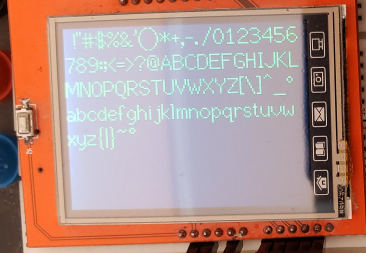
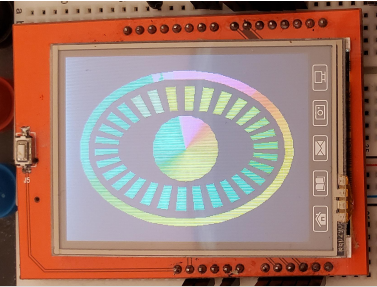

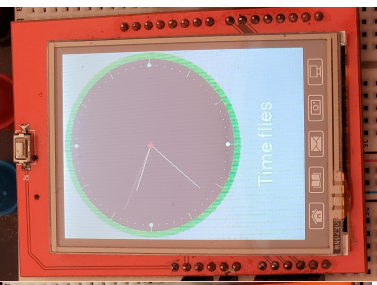


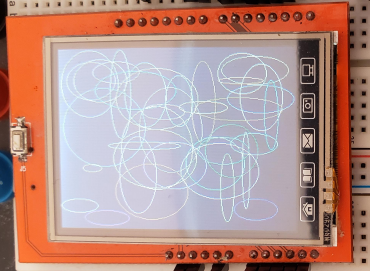
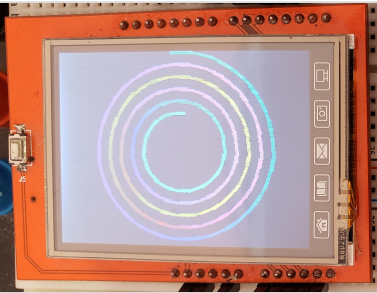
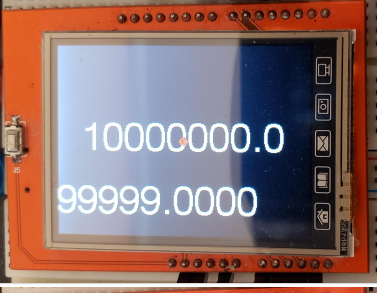



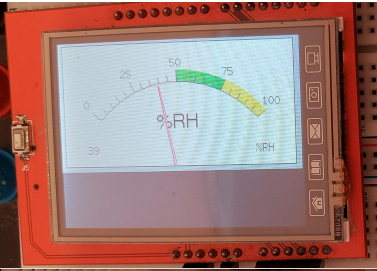
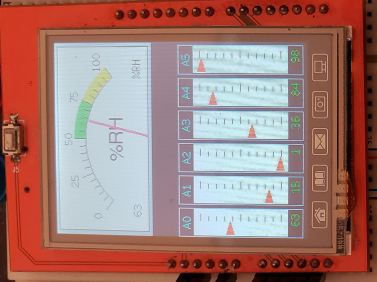
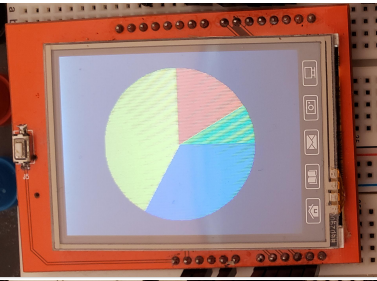

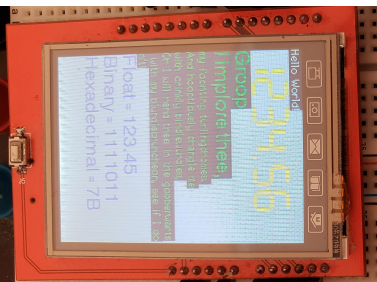

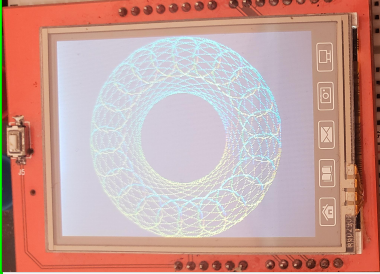
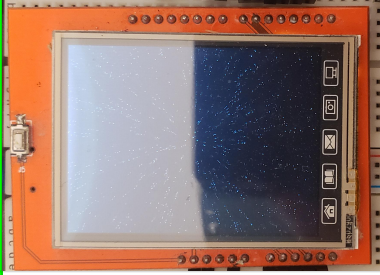
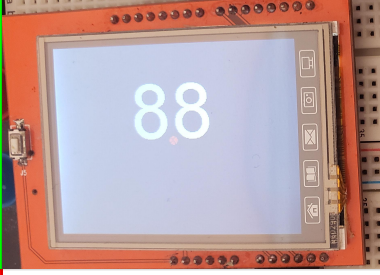
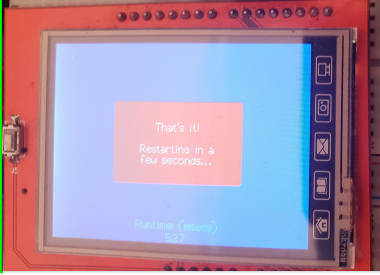



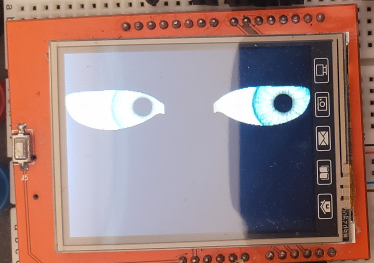

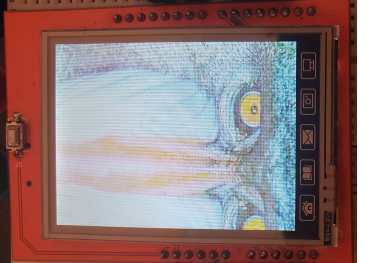
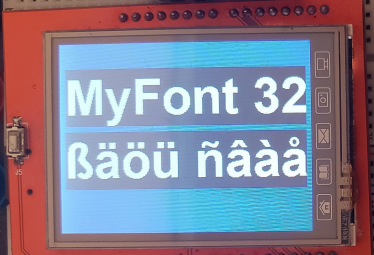
TFT_eSPI\examples\320	TEST		
All_Free_Fonts_Demo	OK		
Cellular_Automata	OK		
Free_Font_Demo	OK		
Keypad_240x320	No SPI Touch Support (resistive)		
Read_ID_bitbash	No SPI is Parallel		
RLE_Font_test	OK		

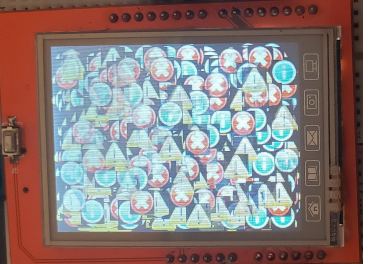
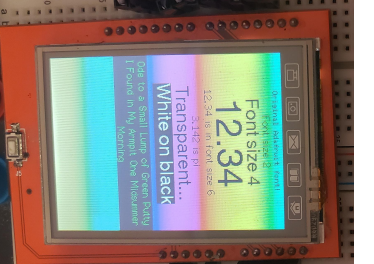
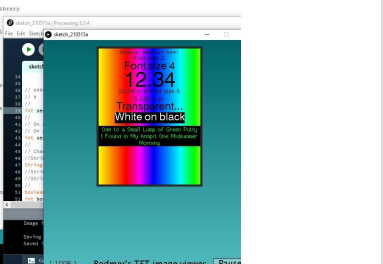

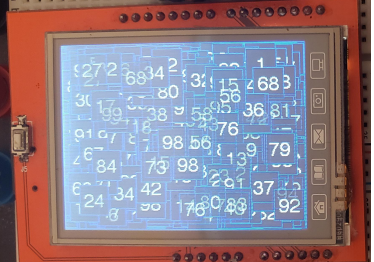
TFT_ArcFill		OK	
TFT_Char_times		OK	
TFT_Clock		OK	
TFT_Clock_Digital		OK	
TFT_Custom_Fonts		OK	
TFT_Ellipse		OK	

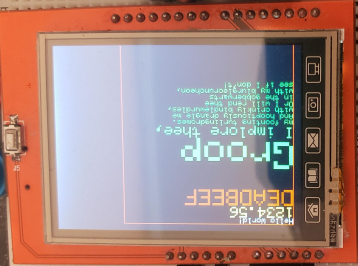
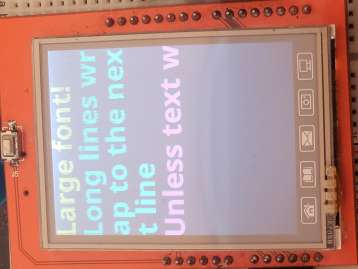
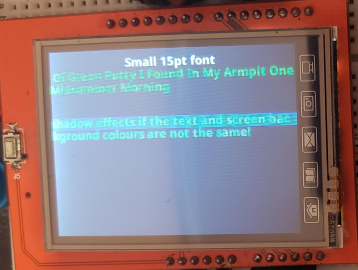

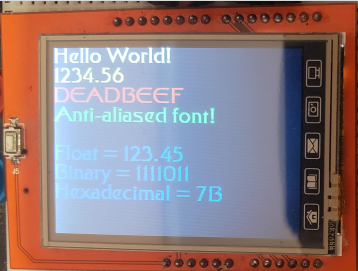
TFT_FillArcSpiral	OK	
TFT_Float_Test	OK	
TFT_graphicstest_one_lib	OK	
TFT_graphicstest_PDQ	OK	
TFT_Mandelbrot	OK	
TFT_Matrix	For Driver ILI9341, Scroll not Supported	

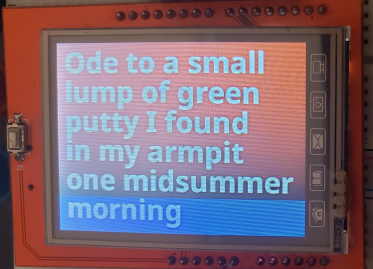
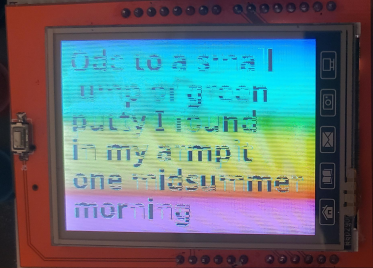
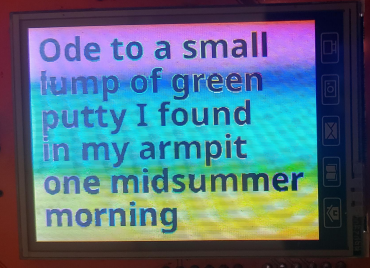

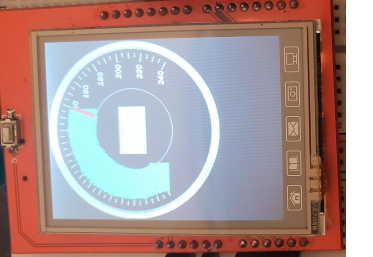
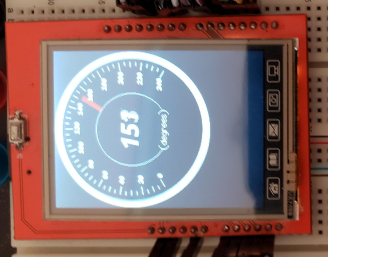
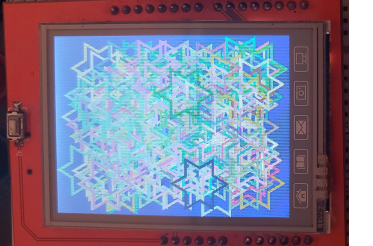
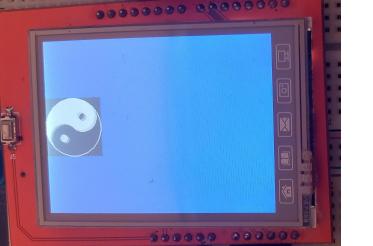
TFT_Meters	OK	
TFT_Meter_linear	OK	
TFT_Pie_Chart	OK	
TFT_Pong	OK	
TFT_Print_Test	OK	
TFT_Rainbow_one_lib	OK	








TFT_Read_Reg	For Driver ILI9341, no Read Register Support		
TFT_Spiro	OK		
TFT_Starfield	OK		
TFT_String_Align	OK		
TFT_Terminal	For Driver ILI9341, Scroll not Supported		
UTFT_demo	OK		
TFT_eSPI\examples\Generic			

alphaBlend_Test	OK		
Animated_Eyes_1	OK		
Animated_Eyes_2	For 2 Displays, is overlapping		
drawXBitmap	OK		
ESP32_SDcard_jpeg	OK		
ESP8266_uncannyEyes	For ESP8266		
Local_Custom_Fonts	OK		



On_Off_Button	No SPI Touch Support (resistive)		
TFT_Button_Label_Datum	No SPI Touch Support (resistive)		
TFT_Flash_Bitmap	OK		
TFT_Screen_Capture	<p>OK</p> <p>On Processing need change bool to boolean types, works in version 3.5.4.</p> <p>Fixed readAddrWindow()</p>		
TFT_SPIFFS_BMP	<p>OK</p> <p>https://randomnerdtutorials.com/install-esp32-filesystem-uploader-arduino-ide/</p>		
Touch_calibrate	No SPI Touch Support (resistive)		
Viewport_Demo	OK		

Viewport_graphicstest	OK		
TFT_eSPI/examples/Smooth Fonts/FLASH_Array			
Font_Demo_1_Array	OK		
Font_Demo_2_Array	OK		
Font_Demo_3_Array	OK		
Font_Demo_4_Array	OK		
Print_Smooth_Font	OK		

Smooth_font_gradient	OK		
Smooth_font_reading_TFT	OK Fixed with readPixel()		
Unicode_test	OK		
TFT_eSPI\examples\Sprite			
Animated_dial	OK Fixed with readRect()		
One_bit_Sprite_Demo	OK		
One_bit_Yin_Yang	OK		

Orrery	OK	
Rotated_Sprite_1	OK	
Rotated_Sprite_2	OK	
Rotated_Sprite_3	Not OK, I don't know..	
Sprite_draw	OK	
Sprite_draw_4bit	OK	
Sprite_image_4bit	OK	

Sprite_RLE_Font_test	OK		
Sprite_scroll	OK		
Sprite_scroll_1bit	OK		
Sprite_scroll_4bit	OK		
Sprite_scroll_8bit	OK		
Sprite_scroll_16bit	OK		
Sprite_scroll_wrap_1bit	OK		

Sprite_TFT_Rainbow	OK		
Transparent_Sprite_Demo	OK		
Transparent_Sprite_Demo_4bit	OK	